


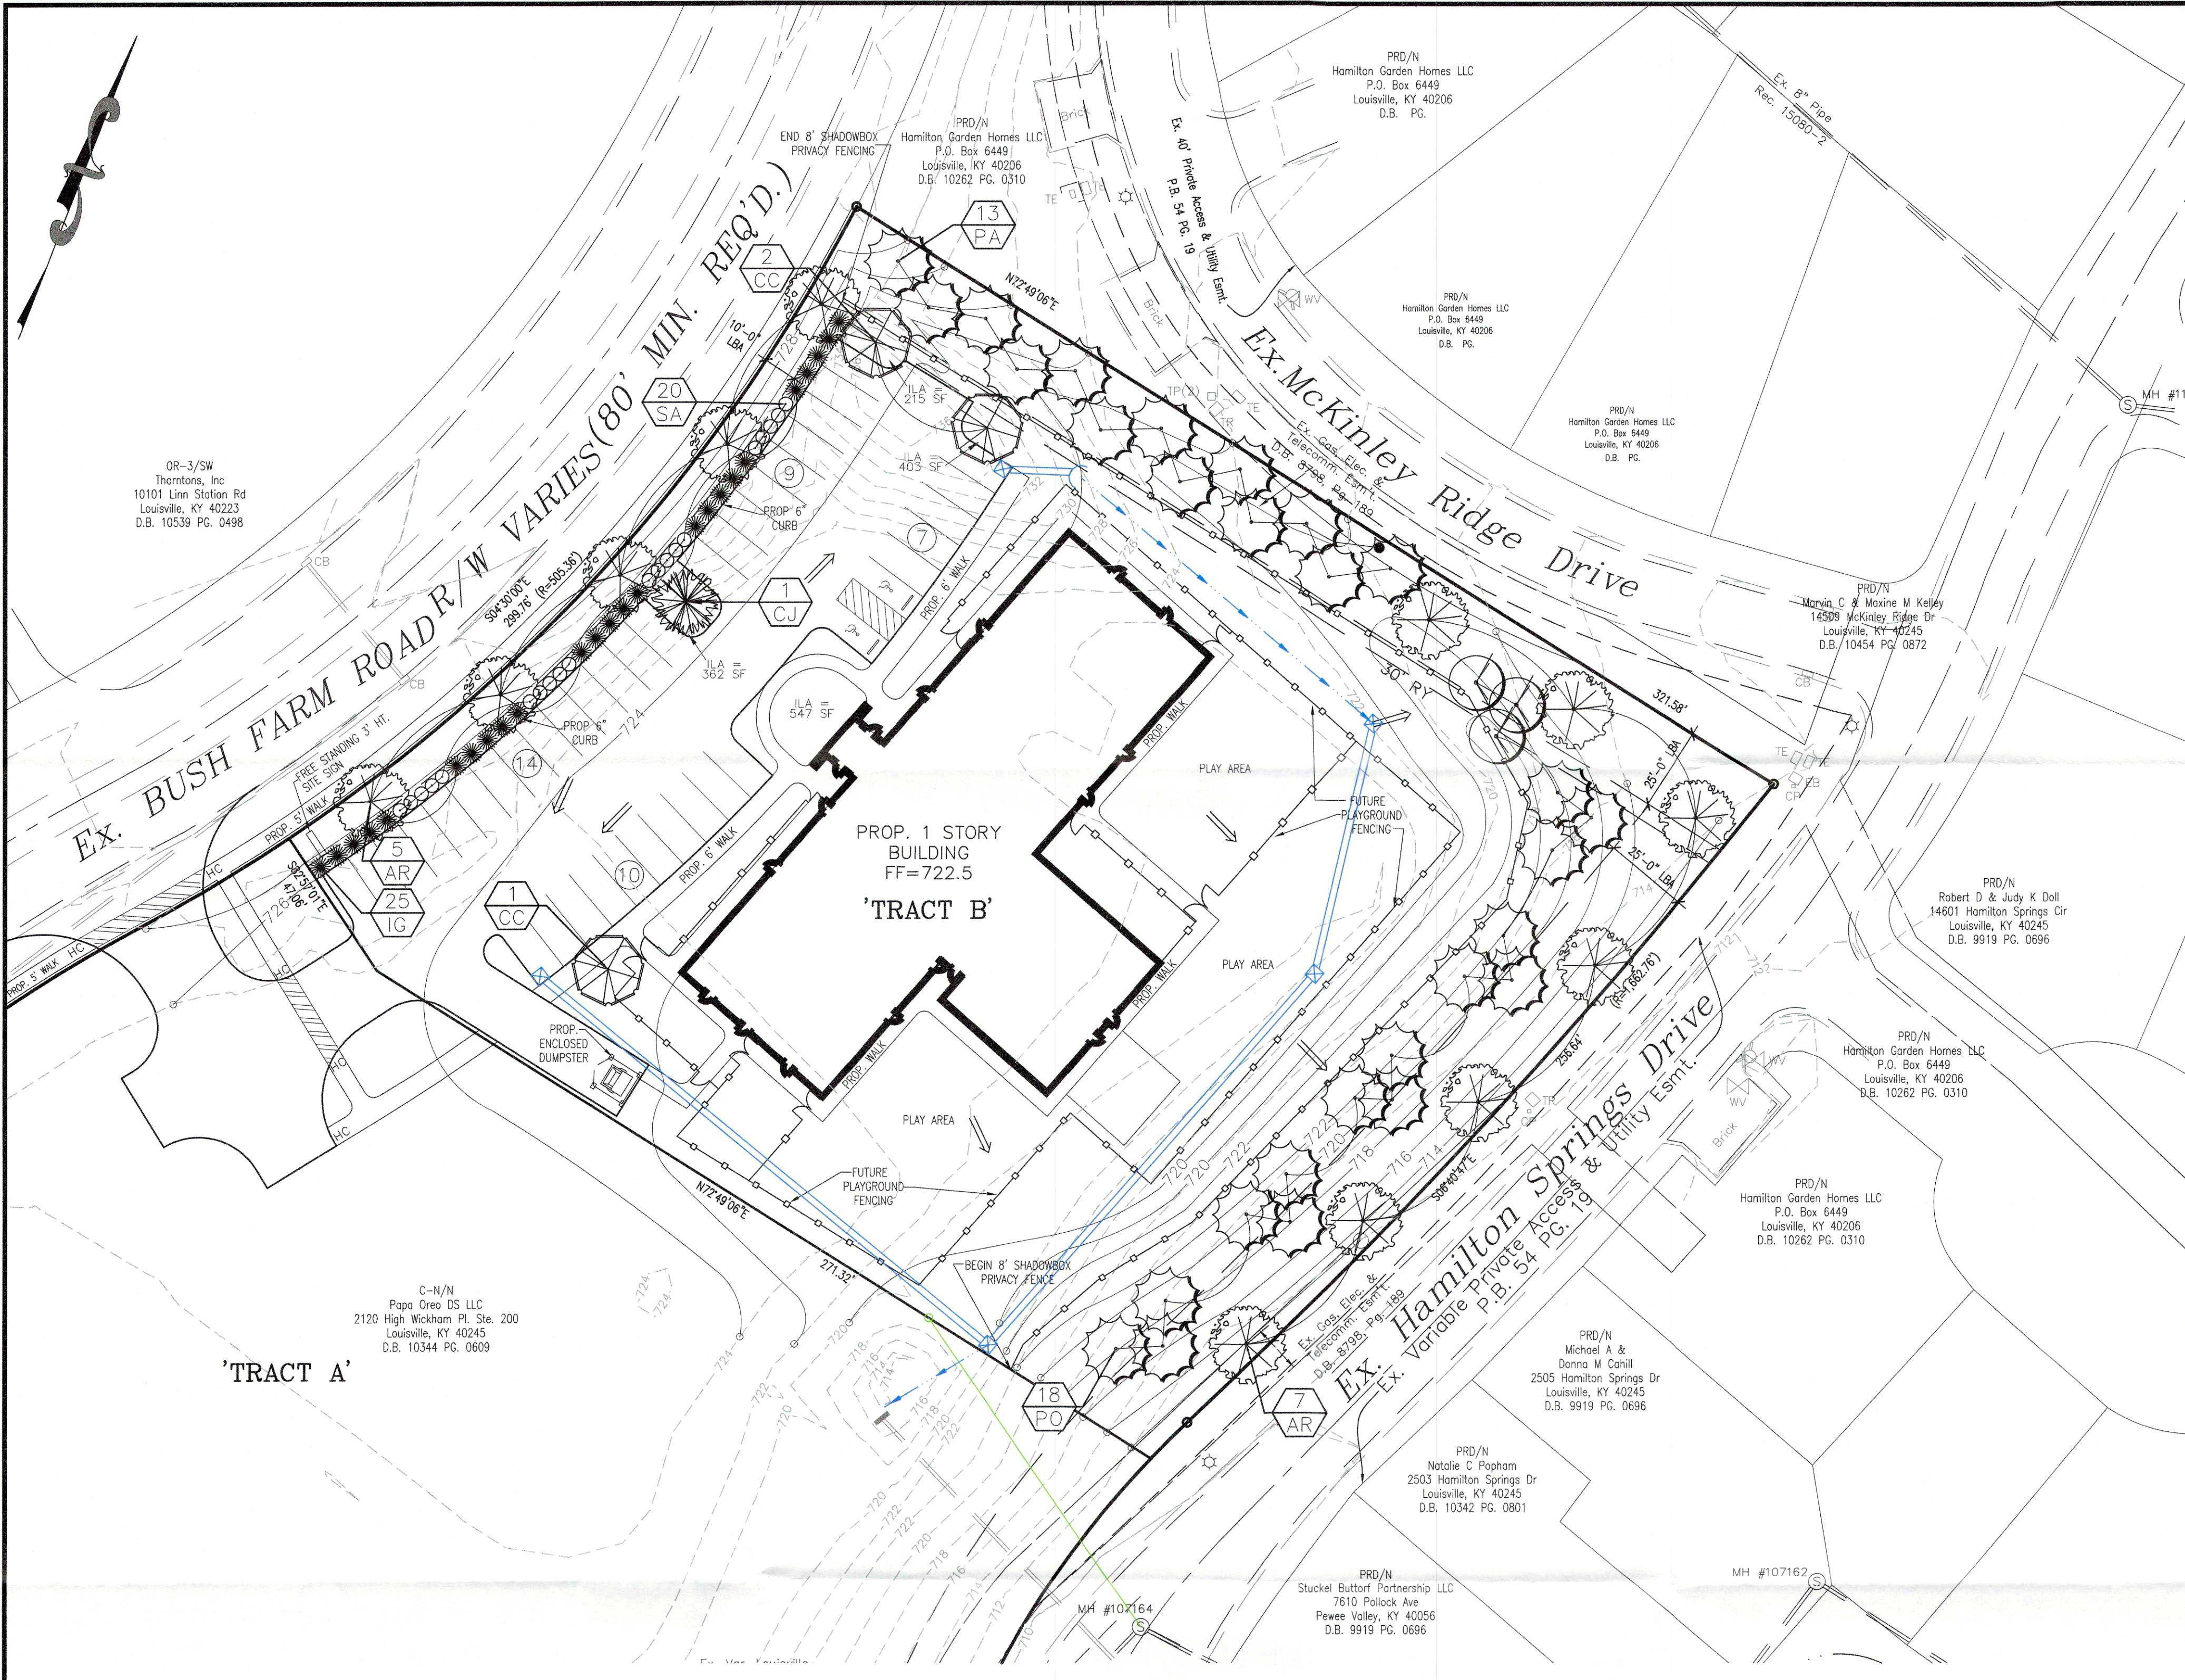


VARIANCE GRANTED:
(17DEVPLAN1140 SEPT. 11, 2017)

1. A Variance has been granted from Table 5.3.2 of The Louisville Metro Land Development Code to vary the Hamilton Springs Drive 80' maximum setback.

VARIANCE GRANTED:
(16ZONE1042 JANUARY 19, 2017)

1. A Variance has been granted from Table 5.3.2 of The Louisville Metro Land Development Code to vary the Bush Farm Road 80' maximum setback.

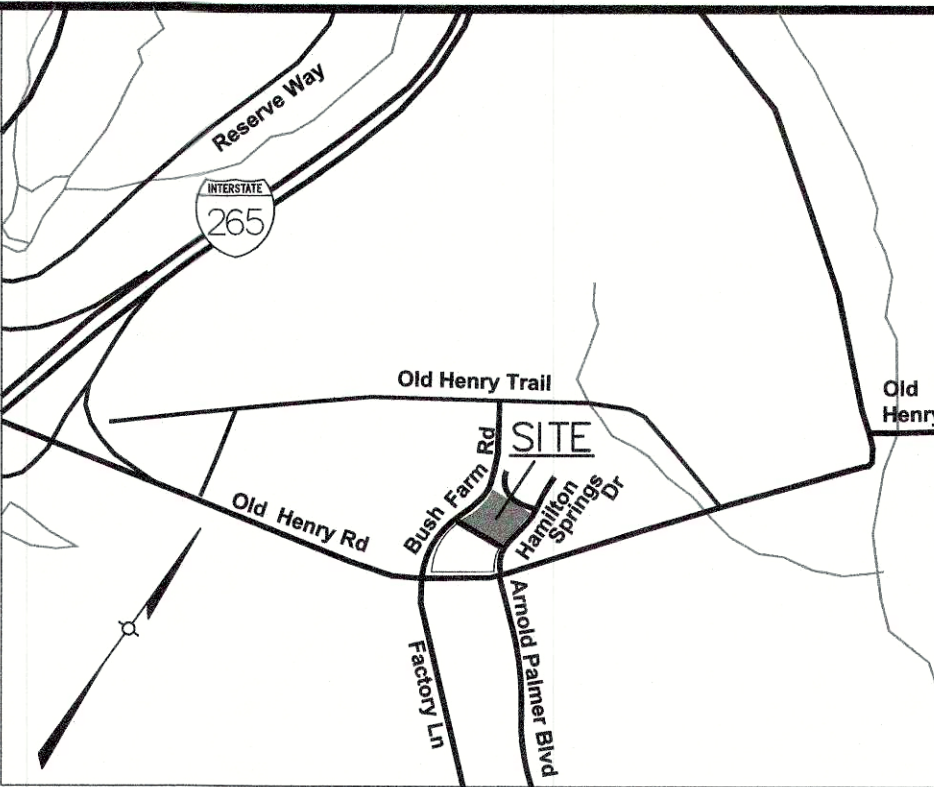

SITE DATA 'TRACT B'

SITE AREA	= 1.9± Ac. (83,155 S.F.)
EXISTING ZONING	= C-N
FORM DISTRICT	= NEIGHBORHOOD
EXISTING USE	= UNDEVELOPED
PROPOSED USE	= DAYCARE
BUILDING AREA	= 12,300 S.F.
BUILDING HEIGHT	= 1 STORY (30' MAX. ALLOWED)
PARKING REQUIRED	MIN. 40 SPACES (2 ACCESSIBLE SPACES INCLUDED)
2 SP/15 EMPLOYEE MIN./4 SP/15 EMPLOYEE MAX	MAX. 60 SP
TOTAL PARKING PROVIDED	= 30 SPACES
F.A.R.	= 0.15 (0.5 MAX. ALLOWED)
VEHICULAR USE AREA	= 14,303 S.F.
INTERIOR LANDSCAPE AREA REQUIRED (7.5%)	= 1,642 S.F.
INTERIOR LANDSCAPE AREA PROVIDED	= 4 TYPE A OR B
ILA TREES REQUESTED	= 4 TYPE B
ILA TREES PROVIDED	= 4 TYPE B

LANDSCAPE NOTES:






- GRASS, GROUNDCOVER, OR MULCH SHALL BE PLANTED ON ALL PORTIONS OF THE LANDSCAPE BUFFER AREA (LBA) NOT OCCUPIED BY OTHER LANDSCAPE MATERIAL.
- THE GROUND PLANE OF ALL INTERIOR LANDSCAPE AREAS (ILA) SHALL BE PLANTED USING EITHER SHRUBS, GROUNDCOVER, MULCH, OR TURF.
- IT WILL BE THE RESPONSIBILITY OF THE PROPERTY OWNER TO PERPETUALLY MAINTAIN ALL LANDSCAPE AREAS AND ASSOCIATED PLANT MATERIAL REQUIRED UNDER LAND DEVELOPMENT CODE REGULATIONS. THE PROPERTY OWNER SHALL ALSO BE RESPONSIBLE FOR MAINTAINING THE VERGE AND ASSOCIATED TREES WITHIN THE VERGE UNLESS THE AGENCY HAVING JURISDICTION OVER THAT VERGE ASSUMES THAT RESPONSIBILITY.
- ALL UNHEALTHY OR DEAD PLANT MATERIAL SHALL BE REPLACED WITHIN ONE YEAR, OR BY THE NEXT PLANTING PERIOD, WHICHEVER COMES FIRST, WHILE OTHER DEFECTIVE PLANT MATERIAL SHALL BE REPLACED OR REPAIRED WITHIN THREE (3) MONTHS.
- ALL PLANT MATERIAL LOCATED WITHIN A UTILITY EASEMENT THAT IS DAMAGED OR REMOVED DUE TO WORK REQUIRED BY THE UTILITY COMPANY SHALL BE IMMEDIATELY REPLACED BY THE OWNER IN ACCORDANCE WITH LAND DEVELOPMENT CODE CHAPTER 10 REQUIREMENTS.
- STREET TREES SHALL BE PLANTED IN A MANNER THAT DOES NOT AFFECT PUBLIC SAFETY AND MAINTAINS PROPER SIGHT DISTANCES.
- ALL SERVICE STRUCTURES SHALL BE SCREENED IN ACCORDANCE WITH LAND DEVELOPMENT CODE CHAPTER 10, SECTION 10.2.6 AND 10.4.9. SERVICE STRUCTURES INCLUDE BUT ARE NOT LIMITED TO: PROPANE TANKS, DUMPSTERS, HVAC UNITS, ELECTRIC TRANSFORMERS, TELECOM BOXES, ETC.
- LIGHT POLES, SIDEWALKS, BENCHES, ETC. SHALL NOT OCCUPY MORE THAN 25% OF ANY INTERIOR LANDSCAPE AREA (ILA) OR REDUCE THE WIDTH OF ANY PLANTED AREA TO LESS THAN 4 FEET. CONTRACTOR SHALL COORDINATE LIGHT POLE LOCATIONS WITH LANDSCAPE PLAN PROPOSED TREE PLANTING TO AVOID CONFLICT.
- AN AUTHORIZED INSPECTOR SHALL HAVE THE RIGHT TO ENTER ONTO ANY PROPERTY TO INSPECT THE HEALTH AND GENERAL CONDITION OF PLANT MATERIAL THAT IS; LOCATED IN THE RIGHT OF WAY; PART OF AN APPROVED DEVELOPMENT/LANDSCAPE PLAN; OR REPORTED AS A PUBLIC HAZARD.
- REMOVE ALL BROKEN, DISEASED, OR WEAK BRANCHES.
- MAKE ALL CUTS LEVEL, HAVING AS LITTLE STUB AS POSSIBLE.
- SAUCERS SHALL BE SOAKED WITH WATER AND MULCHED IMMEDIATELY FOLLOWING PLANTING.
- ALL ROOT BALLS REMOVED FROM CANS SHALL BE SCARIFIED PRIOR TO BACKFILLING.
- SCARIFY ALL EDGES AND WALLS OR PLANT PITS 8".
- LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF PLANT MATERIAL AS PER PLANS.
- PLANT SCHEDULE IS FOR CONTRACTOR'S CONVENIENCE ONLY. CONTRACTOR SHALL VERIFY ALL QUANTITIES.
- MULCH ALL PLANTS AND PLANT BEDS AS PER DETAILS.
- ALL TREES MUST BE STRAIGHT TRUNKED AND FULL HEADED.
- NEVER CUT A LEADER WHEN PRUNING.
- LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES BEFORE COMMENCING CONSTRUCTION AND SHALL BE RESPONSIBLE FOR ANY DAMAGE DURING CONSTRUCTION.
- MAINTENANCE FOR PLANT MATERIAL SHALL INCLUDE WATERING, SPRAYING, MULCHING, FERTILIZING, PRUNING, ETC., AND IS THE RESPONSIBILITY OF THE LANDSCAPE CONTRACTOR UNTIL FINAL APPROVAL BY LANDSCAPE ARCHITECT AND OWNER.
- THE OWNER SHALL PROVIDE ALL MAINTENANCE (INCLUDING WATERING) THROUGHOUT THE GUARANTEE PERIOD UNLESS OTHERWISE SPECIFIED.
- ALL PLANT MATERIAL SHALL CONFORM TO THE SIZE AND QUALITY AS SPECIFIED IN THE "AMERICAN STANDARDS FOR NURSERY STOCK" - CURRENT EDITION.
- ALL PLANT MATERIAL SHALL BE INSTALLED AT THE SAME DEPTH AS GROWN AT THE NURSERY.
- IRRIGATION WILL BE PROVIDED AS REQUIRED WHERE BERMS OR EARTHEN MOUNDS ARE PROPOSED TO MEET THE REQUIREMENTS OF THE LAND DEVELOPMENT CODE. THIS IRRIGATION SYSTEM SHALL BE DESIGNED TO PROVIDE ADEQUATE WATERING OF THE PROPOSED PLANT MATERIAL AND LAWN AREAS. THE SYSTEM SHALL CONSIST OF SEVERAL WATERING ZONES CONTROLLED BY A CENTRAL TIMER WITH EITHER POP-UP AND ROTATING IRRIGATION HEADS OR A DRIP LINE SYSTEM. THE PROPOSED SYSTEM SHALL BE INSTALLED PRIOR TO PLANTING. (IF APPLICABLE)
- CONSTRUCTION FENCING SHALL BE ERECTED WHEN OFF-SITE TREES OR TREE CANOPY EXISTS WITHIN 3' OF A COMMON PROPERTY LINE. FENCING SHALL BE IN PLACE PRIOR TO ANY GRADING OR CONSTRUCTION TO PROTECT THE EXISTING ROOT SYSTEMS FROM COMPACTION. THE FENCING SHALL ENCLOSE THE ENTIRE AREA BENEATH THE TREE CANOPY AND SHALL REMAIN IN PLACE UNTIL ALL CONSTRUCTION IS COMPLETED. NO PARKING, MATERIAL STORAGE OR CONSTRUCTION ACTIVITIES ARE PERMITTED WITHIN THE PROTECTED AREA.
- WOODEN PRIVACY FENCING AND ENHANCED LANDSCAPING ALONG THE PERIMETERS AT HAMILTON SPRINGS AND MCKINLEY RIDGE DRIVES, ARE REQUIRED TO BE REVIEWED AND APPROVED BY LOUISVILLE METRO LAND DEVELOPMENT AND TRANSPORTATION COMMITTEE OR DEVELOPMENT REVIEW COMMITTEE.
- THIS LANDSCAPE PLAN INCLUDES THE REQUIRED ENHANCED LANDSCAPE SCREENING/BUFFER AND WOOD FENCING REQUIRED BY THE BINDING ELEMENTS PER APPROVED DEVELOPMENT PLAN 16ZONE1042.

TREE CANOPY CALCULATIONS

TOTAL GROSS SITE AREA	= 83,155 S.F.
CANOPY REQUIREMENT CLASS	= CLASS C (20% OF CANOPY COVERAGE, 16,631 S.F.)
EXISTING TREE CANOPY AREA	= 0 S.F.
EXISTING TREE CANOPY TO BE PRESERVED	= 0%
PROPOSED TREE CANOPY	= 12,480 S.F.
(13) 3" CAL TYPE "A" TREES @ 720 S.F. EACH	= 1,908 S.F.
(18) 6" TYPE "A" EVERGREENS @ 106 S.F.	= 1,908 S.F.
(3) 2" TYPE "B" TREES @ 432 S.F. EACH	= 1,296 S.F.
(13) 3/4" CAL TYPE "C" TREES @ 89 S.F. EACH	= 1,157 S.F.
TOTAL TREE CANOPY TO BE PLANTED	= 16,841 S.F. (20%)
TOTAL TREE CANOPY PROVIDED	= 16,841 S.F. (20%)

RECEIVED
AUG 30 2017
PLANNING & DESIGN SERVICES

PLANT SCHEDULE						
TREES						
KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	ROOT	REMARKS
AR	12	ACER RUBRUM 'RED SUNSET'	RED SUNSET MAPLE	2" CAL.	B&B	TYPE "A"
CC	3	CARPINUS CAROLINIANA	AMERICAN HORNBEAM	2" CAL.	B&B	TYPE "B"
CJ	1	CERCIDIPHYLLUM JAPONICUM	KATSURA TREE	2" CAL.	B&B	TYPE "B"
PA	13	PICEA ABIES	NORWAY SPRUCE	6'-7" HGT.	B&B	TYPE "A"
PO	18	PICEA OMORICA	SERBIAN SPRUCE	6'-7" HGT.	B&B	TYPE "A"
SHRUBS						
IG	25	ILEX GLADBRA 'COMPACTA'	INKBERRY	18" HT. MIN	CONT.	EVERGREEN 6' O.C. SPACING
SA	20	SPIRAEA ALBA	MEADOWSWEET	18" HT. MIN	CONT.	DECIDUOUS 6' O.C. SPACING

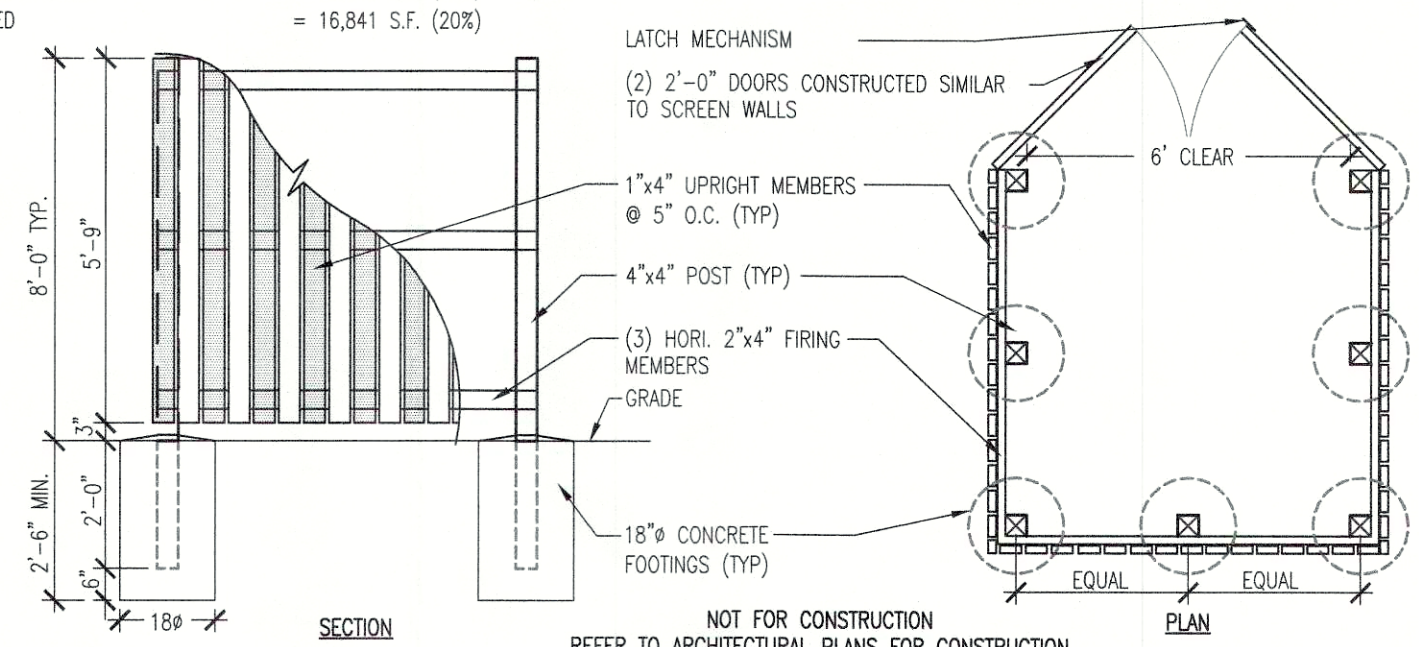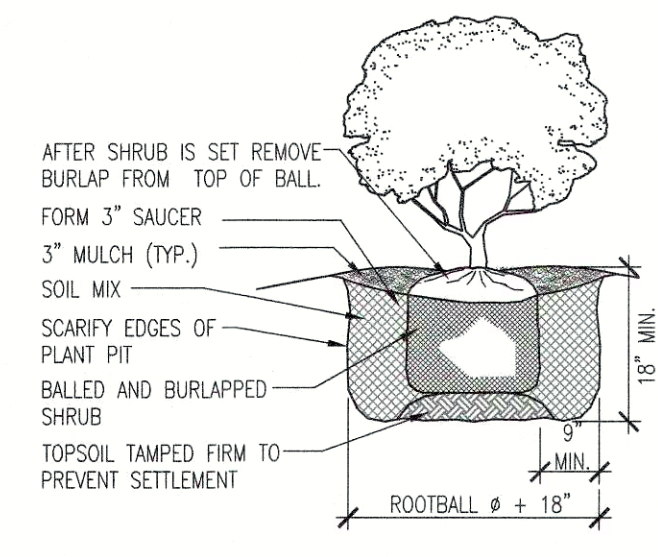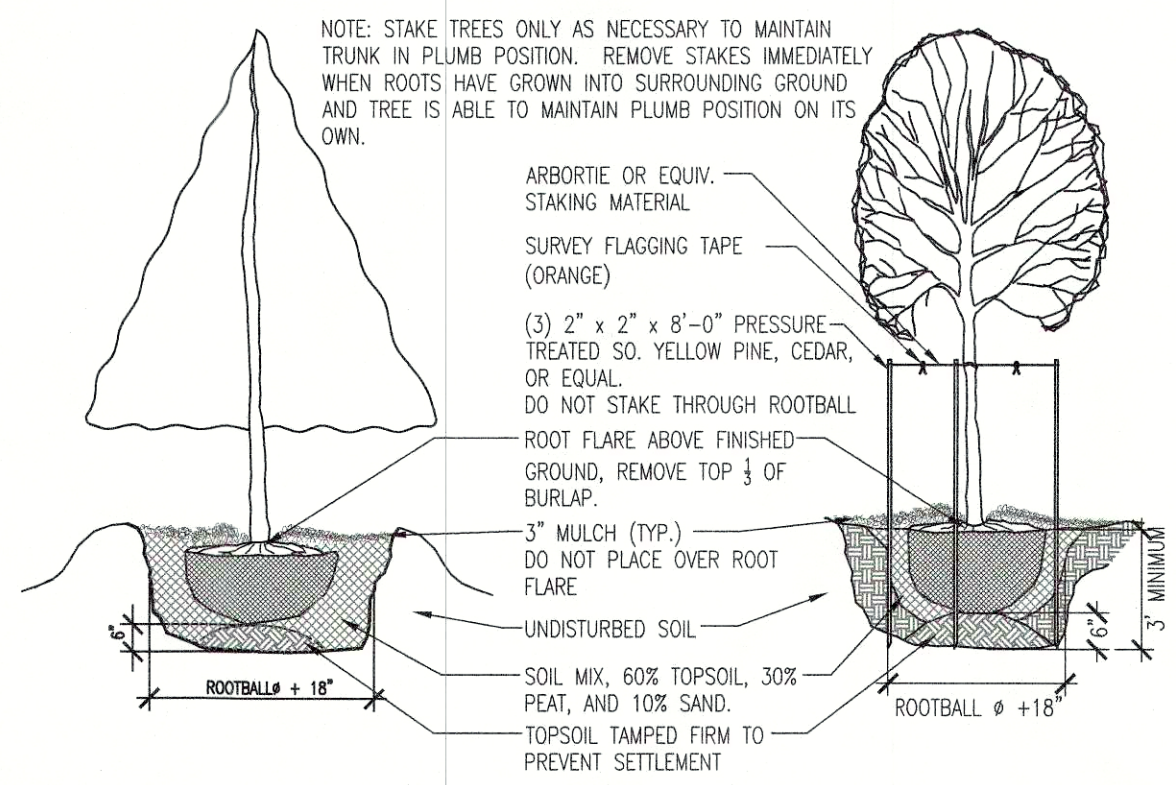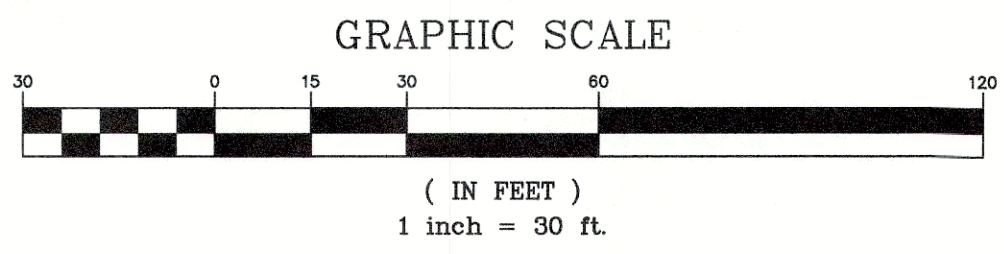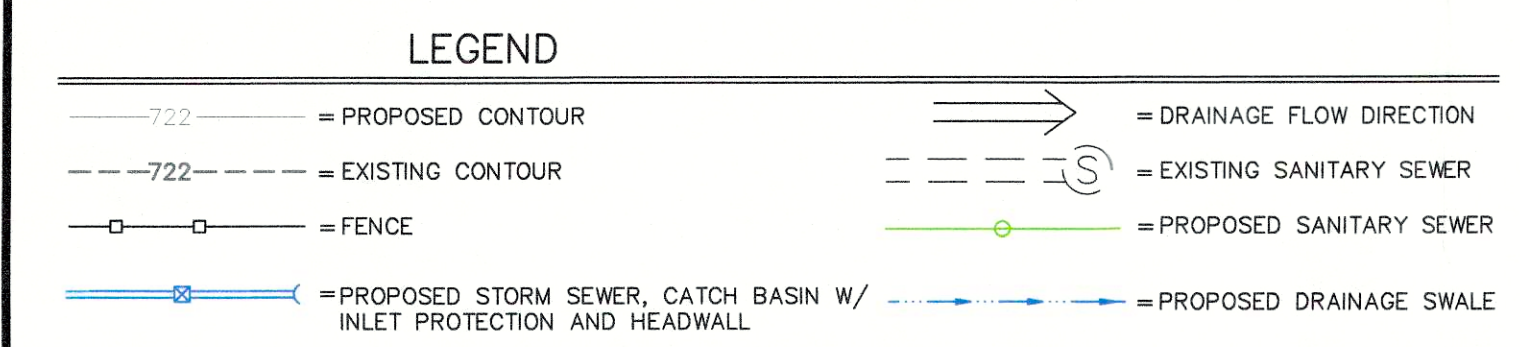

UTILITY NOTE: ALL UTILITIES SHOWN ON THESE PLANS ARE APPROXIMATE. THE INDIVIDUAL SERVICE LINES ARE NOT SHOWN. THE CONTRACTOR OR SUBCONTRACTOR SHALL NOTIFY THE UTILITY PROTECTION CENTER, "KENTUCKY 811" (TOLL FREE PHONE NO. 1-800-752-6007 OR LOCAL NO. 502-266-5123) FORTY EIGHT HOURS IN ADVANCE OF ANY CONSTRUCTION ON THIS PROJECT. THIS NUMBER WAS ESTABLISHED TO PROVIDE ACCURATE LOCATIONS OF EXISTING BELOW GROUND UTILITIES (I.E. CABLES, ELECTRIC WIRES, GAS, AND WATERLINES). WHEN CONTACTING THE "KENTUCKY 811" CALL CENTER, PLEASE STATE THAT THE WORK TO BE DONE IS FOR A PROPOSED MSD SEWER OR DRAINAGE FACILITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BECOMING FAMILIAR WITH ALL UTILITY REQUIREMENTS SET FORTH ON THE PLANS IN THE TECHNICAL SPECIFICATIONS AND SPECIAL PROVISIONS.

OWNER:
SCHULTE HOSPITALITY
2120 HIGH WICKHAM PLACE
SUITE 200
LOUISVILLE, KY 40245

SITE ADDRESS:
14801 BUSH FARM ROAD
LOUISVILLE, KY 40245
TAX BLOCK 0015, LOT 0609
D.B. 10344 PG. 0775

CASE: 17LSLCAPE1128
RELATED CASES:
17DEVPLAN1140, 16ZONE1042,
17VARIANCE1051, &9-99-98
MSDWM #11377

CH. 10 LANDSCAPE PLAN

PRIMROSE SCHOOL OF WORTHINGTON HILLS

DEVELOPER

PRIMROSE SCHOOL FRANCHISING CO.

3660 CEDARCREST ROAD
ACWORTH, GEORGIA 33101
678-778-6017

BY

DESCRIPTION

DATE

NO.

REVISIONS

PROJECT DATA

FILE NAME: 17140 CH10 LSCAPE.dwg

DATE: 8/29/2017

CHECKED BY: SRS

DRAWN BY: CE

SCALE: AS SHOWN

SCALE: 1" = 30'

RECEIVED

AUG 30 2017

PLANNING & DESIGN SERVICES

JOB NO. 17140

SHEET 1

OF 1