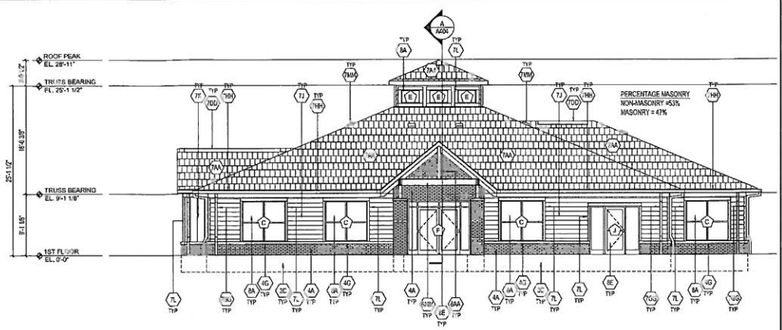

A A211 CLUBHOUSE
FRONT EXTERIOR ELEVATION
SCALE: 1/8" = 1'-0"

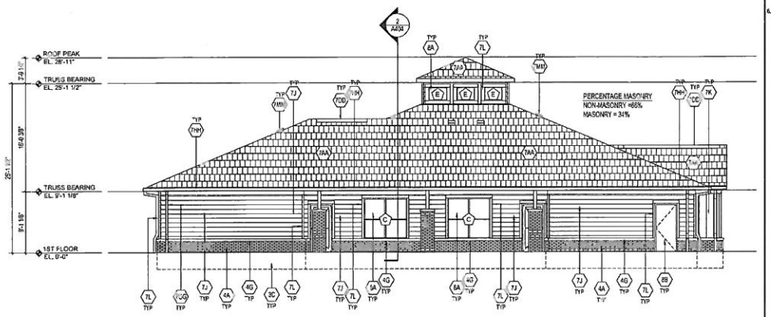

B A211 CLUBHOUSE
BACK EXTERIOR ELEVATION
SCALE: 1/8" = 1'-0"

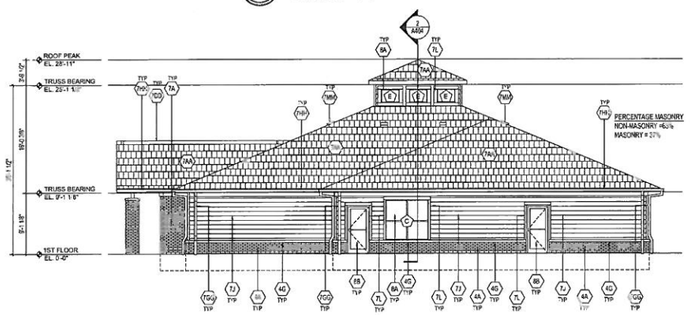

C A211 CLUBHOUSE
LEFT EXTERIOR ELEVATION
SCALE: 1/8" = 1'-0"

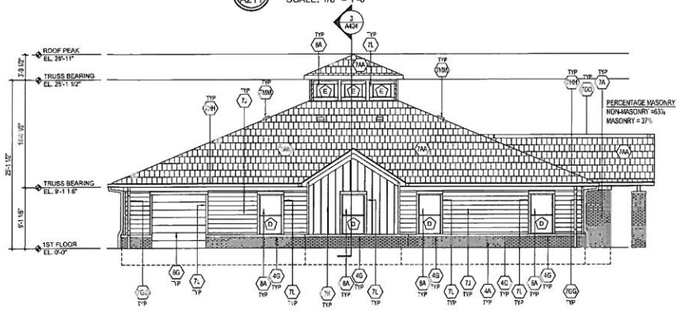

D A211 CLUBHOUSE
RIGHT EXTERIOR ELEVATION
SCALE: 1/8" = 1'-0"

KEY NOTES:

1. GENERAL REQUIREMENTS: NOT USED
2. SITE WORK:
   - 2A. SLOPE GRADE AWAY FROM BUILDING AT A MINIMUM SLOPE OF 5% FOR A MINIMUM OF 10'-0" FEET.
   - 2B. PERFORATED DRAINAGE STORM LINE, REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
3. CONCRETE:
   - 3A. 4" REINFORCED CONCRETE SLAB - REFER TO STRUCTURAL DWGS. FOR ADDITIONAL INFORMATION
   - 3B. CONCRETE SIDEWALK SLAB, SLOPE AWAY FROM BUILDING AT ¼" PER FOOT. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3C. CONCRETE FOOTING, REFER TO STRUCTURAL DRAWING FOR ADDITIONAL INFORMATION.
   - 3D. 2-6 CONCRETE
   - 3E. CONTROL JOINTS AT CONCRETE EXPOSED JOINT WITH SEALANT
   - 3F. CONCRETE SIDEWALK, REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3G. LIGHTWEIGHT CONCRETE TOPPING OVER 6MIL MEMBRANE OVER SUBSTRATE
   - 3H. 6" CURB TYPE VEHICLE STOP
4. MASONRY:
   - 4A. FACE BRICK: RUNNING BOND PATTERN WITH ADJUSTABLE MASONRY ANCHORS AT 16" O.C. VERTICALLY AND HORIZONTALLY. PROVIDE MASONRY CONTROL JOINTS AT 16'-0" FROM INSIDE AND OUTSIDE CORNERS AND EVERY 40'-0" LENGTH OF STRAIGHT WALL
   - 4B. MASONRY EXPANSION JOINT (SEALANT AND BACKER ROD) SHOWN OR TYPED
   - 4C. SOLDIER COURSE FACE BRICK HEADER - PROJECT
   - 4E. CONT. THROUGH-WALL MEMBRANE FLASHING WITH WEEP HOLES @ 24" O.C. PROVIDE CONTINUOUS TAPE FLASHING FROM HEAD AND TO METAL DRIP BAR OR SHOT KNK
   - 4F. 8" CONCRETE REINFORCED VERTICALLY & HORIZONTALLY @ 16" O.C., REFER TO STRUCTURAL DRAWINGS
   - 4F. GROUT SOLID
   - 4G. REPELLED STONE FACE BRICK LEDGE, SLOPED AT 15 DEGREE ANGLE. PROVIDE SOLID BRICK AT ENDS
   - 4H. PRE-CAST SILL, ONE PIECE, INSTALL PER MANUFACTURERS RECOMMENDATIONS
   - 4J. LINTEL - EXTEND 8" MIN. EA. SIDE OF OPENING - REFER TO STRUCTURAL FOR REINFORCING
5. METALS:
   - 5A. ANCHOR BOLTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5B. CONTINUOUS STEEL SHELF ANGLE EXTENDED 8" ON EACH SIDE OF MASONRY OPENING, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5C. STAIR ASSEMBLY, REFER TO STAIR DETAILS FOR ADDITIONAL INFORMATION
   - 5D. METAL POSTS GUARD RAILING W/ HANDRAIL - REFER TO STAIR DETAILS
   - 5E. ELEVATOR PIT LADDER
   - 5F. ELEVATOR HOIST BEAM, REFER TO STRUCTURAL DRAWINGS & ELEVATOR MANUFACTURER FOR ADDITIONAL INFORMATION.
   - 5G. DECORATIVE GUARDRAIL - SEE FABRICATION DETAILS
   - 5H. CONCRETE FILLED METAL PIPE STAIR BY OTHER FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5J. 42" OR 36" OA, STL PAINTED GUARDRAIL & HANDRAIL ASSEMBLY BY OTHER FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5K. STAIR STRINGER BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5L. STAIR LANDING BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5M. 42" STL PROTECTIVE GUARDRAIL UNDER STAIR
   - 5N. STEEL COLUMN WRAPPED IN CEDAR TRIM BOARDS, REFER TO STRUCTURAL FOR ADDIT. INFO.
   - 5P. 42" HIGH 1-1/2" DIA. GUARDRAIL - PAINTED AND PAPERED - SECURED TO ROOF - COLOR TO BE SELECTED BY ARCHITECT
   - 5R. CONTINUOUS FLASHING
   - 5S. CONCRETE 5-WALL 4" BALCONY EDGE, 30 # REINF
6. WOOD, PLASTICS AND COMPOSITES:
   - 6A. 2X6 WOOD STUD FRAMING @ 16" O.C. REFER TO STRUCTURAL
   - 6B. 2X10 WOOD SILL PLATE - PROVIDE "MARSELLA PLUS 6 CONTINUOUS SILL GASKET" FIRST FLOOR ONLY. REFER TO STRUCTURAL
   - 6C. 2x10 WOOD STUD HEADER - REFER TO STRUCTURAL
   - 6D. DOUBLE 2x6 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   - 6E. OPEN WEB WOOD FLOOR JOISTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6F. OPEN WEB WOOD ROOF TRUSSES - REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6G. HUBER ZIP EXTERIOR WALL SHEATHING - TAPE ALL JOINTS PER ZIP SYSTEM USING ZIP SYSTEM FLASHING TAPE - REFER TO STRUCTURAL DWGS FOR ADDITIONAL INFORMATION
   - 6H. 4X6 BEAM/COLUMN - REFER TO STRUCTURAL DRAWINGS
   - 6J. DECORATIVE WOOD BASE, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   - 6K. DECORATIVE WOOD WINDOW SILL, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   - 6L. FIBER CEMENT PANEL SYSTEM WOOD TRIM - REFER TO WALL DETAIL FOR ADDITIONAL INFORMATION
   - 6M. COVE 2X4 EXTERIOR GRADE WOOD FLOORING
   - 6N. FIBER CEMENT FASCIA BOARD OVER 1X WOOD FASCIA BOARD
   - 6P. CONT. WOOD RIM JOIST, REFER TO STRUCTURAL DRAWINGS.
   - 6Q. WOOD BEAM, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6R. LINE OF 8" 2X FRAMING
   - 6S. CONT. 2X10 "LIP" PLATE, CL'd TO SIDES
   - 6T. 6 X 6 ROUGH CUT CEDAR POSTS, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION.
   - 6U. CONT. 2 X 10 ROUGH CUT CEDAR JOISTS ON EACH SIDE OF POSTS, BOLT TO POST PER STRUCTURAL DRAWINGS.
   - 6V. 1X1 BEAMS, REFER TO STRUCTURAL DRAWINGS FOR SIZE AND ADDITIONAL INFORMATION.
   - 6W. PROVIDE 24" EXTERIOR GRADE PLYWOOD SHEATHING OR CATWALK PATH TO ROOFTOP ACCESS PANELS.
   - 6X. CONT. 2x8 ROUGH CUT CEDAR TRELLIS JOISTS @ NOTCH JOISTS AS REQUIRED. OVERLAP, STAGGER JOISTS, TOE SCREW ASSEMBLY TO CROSS JOISTS.
   - 6Y. 2x TREATED PRESSURE TREATED ROOF FRAMING - COORDINATE WITH STRUCTURAL DRAWINGS
   - 6Z. LINE OF STUD WALL FRAMING (SHOWN BASHED)
   - 6AA. WOOD TRELLIS: PAIR OF 2x10 WESTERN CEDAR WOOD MAIN BEAMS BOLTED TO CEDAR COLUMN WITH 2x12 WESTERN CEDAR WOOD CROSS TIES AT 16" O.C.
   - 6BB. 2x2 CEDAR WOOD TRELLIS SECURING BEAMS AT 6" O.C., SECURE TO 2x8 CROSS TIES.
   - 6CC. 2x4 WOOD STUDS @ 16" O.C. REFER TO STRUCTURAL
   - 6DA. 2x4 WOOD SILL PLATE TO LIMESTONE SILL GASKET (FIRST FLOOR ONLY), REFER TO STRUCTURAL
   - 6EE. DOUBLE 2x4 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   - 6FF. JOIST GIRDER - REFER TO STRUCTURAL
   - 6GG. 4'-0" PLYWOOD CATWALK SHEATHING SECURED TO ROOF TRUSSES. - PROVIDE CONTINUOUS CATWALK SURFACE FROM ACCESS HATCH TO ROOF ACCESS PANEL
   - 6HH. ROOF WALKING PADS - COORDINATE WITH ROOFTOP EQUIPMENT
   - 6JJ. 6x6 ROUGH CUT CEDAR POSTS, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION
   - 6KK. 4.5" CEDAR TEO PANELS - RAIN SCREEN STYLE - 6 INCH SLOT
   - 6LL. 6x10 ROUGH CUT CEDAR RAFTER, REFER TO STRUCTURAL DRAWINGS
   - 6QQ. 6x12 ROUGH CUT CEDAR RIDGE POST, REFER TO STRUCTURAL DRAWINGS
7. THERMAL AND MOISTURE PROTECTION:
   - 7A. 6"x6" PRE-FINISHED METAL DOWNSPOUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7B. 6" W RED PRE-FINISHED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT - ROUTE TO STORM PIPING, SEE CIVIL DRAWINGS
   - 7C. R-19 UNFACED BATT INSULATION
   - 7D. FIBERCEMENT CORNICE, PAINTED (COLOR TO BE SELECTED BY ARCHITECT) REFER TO WALL SECTIONS AND DETAILS FOR ASSEMBLY.
   - 7E. BATT INSULATION - REFER TO DOOR/DECK & RECESS DOOR FOR R-VALUES
   - 7F. 5'-8" THK. CEDAR FINISHED FIBERCEMENT PANEL BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7G. HORIZONTAL 22GA KEYSTONE WALL PANELS WITH CORNER (NOTE: OUTSIDE AND INSIDE TRIM ASSEMBLIES) - BASIS OF DESIGN MFR: METAL TALES; PRODUCT: TBD; INSTALL PER MFR'S RECOMMENDATIONS. - COLOR TO BE SELECTED BY ARCHITECT
   - 7H. 4" NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7J. 8" W NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT
   - 7K. CEDAR FINISHED FIBER-CEMENT BOARD AND BATTEN SIDING @ 12" O.C. - COLOR TO BE SELECTED BY ARCHITECT.
   - 7L. 4" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7M. 6" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7N. FULLY ADHERED MEMBRANE ROOFING OVER 1/2" RIGID INSULATION OVER 1/2" EXTERIOR GRADE PLYWOOD SHEATHING W/ CLIPS, INSTALL PER MEMBRANE ROOFING MFR'S RECOMMENDATIONS.
   - 7P. MEMBRANE ROOF FLASHING, EXTEND OVER ROOF UP AND OVER PARAPET WALL - INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
   - 7Q. ROOF GROMET - FORM FROM RIGID BOARD - APPLY TYPICAL MEMBRANE ROOFING TO MATCH ROOF
   - 7R. MEMBRANE FLASHING AND CONTINUOUS METAL COUNTERFLASHING, EXTEND MEMBRANE UP WALL MIN. 12"
   - 7S. PRE-FINISHED ALUMINUM COPING CAP SLOPE 1/4" PER FOOT TOWARDS ROOF, COLOR TO BE SELECTED BY ARCHITECT. SEE WALL DETAILS FOR PARAPET CONDITION
   - 7T. CONTINUOUS PRE-FINISHED DRIP EDGE FLASHING, EXTEND UNDER EXTERIOR FINISH MIN. 4"
   - 7U. CONTINUOUS VENTILATION, REFER WITH FASTENERS AT 12" O.C.
   - 7V. SHAKE FINISHED 5/16" THICK FIBER-CEMENT PANELS - COLOR TO BE SELECTED BY ARCHITECT. WITH THE FOLLOWING METAL EDGE TRIMS BY MFR: 3" V (VERTICAL JOINTS - FOR A VERTICAL REMINDER WITH "VERTICAL INSERT"), HORIZONTAL JOINTS: DOUBLE HORIZONTAL FOR GABLES, OUTSIDE CORNERS: 3" FOR OUTSIDE CRFS, INSIDE CORNERS: FOR 90° IS CRFS, TWO PANEL ENDS: FOR ACHIEVABLE CONNECTOR SHALL USE FITTINGS/ CRFP CAPS ABOVE OPENINGS: CONTRACTOR SHALL USE BASE TRIM (FOR BASE AT FIRST FLOOR) AT WATERSHED WITH OTHER SIDING CONTINUES BELOW. TWO FIBER PANEL SIDING TRIM FINISH TO BE SELECTED BY ARCHITECT.
   - 7W. WEATHER BARRIER WRAP (SHOWN DASHED) - NOT USED ON EXTERIOR WALLS WHEN ZIP SHEATHING IS USED
   - 7X. R-13 UNFACED BATT INSULATION
   - 7Y. CONTINUOUS 2" RIGID INSULATION
   - 7Z. 3-5/8" BATT INSULATION
   - 7AA. ASPHALT COMPOSITE SHINGLES OVER #15 ROOF FELT OVER EXTERIOR GRADE ROOF SHEATHING W/ CLIPS - REFER TO STRUCTURAL DRAWINGS
   - 7BB. ROOF AND LOUVER, LOUVER HOOD - PITCH MFR. TBD
   - 7CC. METAL ROOF FLASHING, EXTEND UNDER SHINGLES AND UP WALL MIN. 8"
   - 7DD. RIDGE VENT
   - 7EE. UNUSED
   - 7FF. CONTINUOUS PRE-FINISHED ALUMINUM DRIP EDGE, INSTALL UNDER ASPHALT SHINGLES AND EXTEND OVER ROOF MEMBRANE FLASHING MIN. OF 4"
   - 7GG. 24" PRE-FINISHED METAL GUTTER/SPOUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7HH. 4" WIDE PRE-FINISHED RECTANGULAR METAL GUTTER - COLOR TO BE SELECTED BY ARCHITECT. - ROUTE/CONNECT TO STORM PIPING, SEE CIVIL DRAWINGS
   - 7JJ. METAL ROOFING
   - 7KK. CONTINUOUS INSULATION BAFFLE
   - 7LL. FACE TRIANGLE LOUVER
   - 7MM. SLANT BACK ROOFTOP LOUVER, (MINIMUM OF 50.75 SF IN OF FREE VENTILATION AREA PER UNIT) - COLOR TO BE SELECTED BY ARCHITECT, PROVIDE ONE SF OF FREE VENTILATION PER EVERY 150 SQ. FT OF ATTIC FLOOR SPACE. ADD TO INSTALL VENT BELOW PER MFR'S RECOMMENDATIONS.
   - 7NN. TRASH CHUTE EXHAUST HOOD
   - 7PP. 12" NOMINAL FIBER CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7QQ. 1/4" FIBER CEMENT TRIM BOARD OVER 1x ELASTOMERIC WOOD ROOF BOARD, CONTINUOUS AT DRYWALL EDGE
   - 7RR. VENTED SOFFIT PANEL - PROVIDE BLOCKING AS NECESSARY
   - 7SS. FIBER CEMENT TRIM BOARDS - PROVIDE ADHESIVE TO WRAP BEAM
   - 7TT. RECESSED 6x8 PRE-FINISHED METAL GUTTER
8. OPENINGS:
   - 8A. VINYL WINDOW UNIT WITH INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION. INSTALL PER MANUFACTURER'S INSTRUCTIONS
   - 8B. EXTERIOR INSULATED METAL DOOR AND FRAME ASSEMBLY, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION. PER MANUFACTURER'S INSTRUCTIONS
   - 8C. EXTERIOR WOOD PATIO DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8D. ALUMINUM THRESHOLD, PROVIDE MIN. 1 BEAD OF CONT. SEALANT UNDER THRESHOLD
   - 8E. ALUMINUM STOREFRONT DOOR & WINDOW ASSEMBLY WITH INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION
   - 8F. ELEVATOR SHAFT VENT - 24" X 16" ALUMINUM
   - 8G. OVERHEAD COILING DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION
   - 8H. 24" x 24" RATED EXTERIOR ACCESS PANEL, PAINT TO MATCH CEILING / FLOOR.
   - 8J. VINYL PICTURE WINDOW UNIT WITH INSULATED GLAZING AND INTERIOR CHANNEL FLANGE. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8K. ALUMINUM WINDOW UNIT WITH INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8L. PULL-DOWN ATTIC STAIR, GUARD & ALUMINUM FOLDING STAIRWAY
9. FINISHES:
   - 9A. FINISH FLOOR, REFER TO DOOR FINISH SCHEDULE FOR ADDITIONAL INFO.
   - 9B. SEE TYPE "B" GYPSUM WALL BOARD
   - 9C. 5/8" TYPE 'X' GYPSUM BOARD OVER 1/2" RESILIENT CHANNELS @ 12" O.C. (PER UL # U367 FOR CEILING AND UL # P512 FOR WALL)
   - 9D. 5/8" FIRE RATED EXTERIOR GYPSUM SOFFIT BOARD OVER 1/2" RESILIENT CHANNELS @ 24" O.C.
   - 9E. TWO LAYERS OF 5/8" TYPE 'X' GYPSUM WALLBOARD ON RESILIENT CHANNELS @ 12" O.C. OVER 5/8" TYPE 'X' GYPSUM BOARD (PER UL # U371 FOR CEILING ASSEMBLY)
10. SPECIALTIES:
    - 10A. MECHANICAL VENTILATION LOUVER, REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
11. EQUIPMENT:
    - 11A. METAL WALKOUT UNIT, REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION. INSTALL PER MFR. RECOMMENDATIONS.
    - 11B. ROOF ACCESS HATCH
14. CONVEYING SYSTEMS
    - 14A. ELEVATOR - REFER TO ELEVATOR MANUFACTURER'S DRAWINGS
15. PLUMBING
    - 15A. DRAINING FOUNTAIN, REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION. PROVIDE HIGH-LOW ADA DOUBLE UNIT

ARCHITECT
Studio A, LLC
2330 FRANKFORT AVE
LOUISVILLE, KENTUCKY 40206
T:502.589.8007 | F:502.589.8004
WWW.STUDIOAARCH.COM

NOTE:
DOOR PLACEMENT:
UNLESS OTHERWISE DIMENSIONED ON PLANS, INSTALL DOORS PER THE FOLLOWING FINISH DIMENSIONS LISTED BELOW (FACE OF GWB TO FACE OF GWB):



NOTE:
1. DIMENSIONS IN PLAN ARE FROM FACE OF STUD FRAMING TO FACE OF STUD.
2. FRAMING,WINDOW & EXTERIOR DOOR LOCATIONS ARE SHOWN FOR REFERENCE ONLY. FOR EXACT WINDOW & DOOR LOCATIONS PLEASE REFER TO FLOOR DIMENSION PLANS.

KEY PLAN

RECEIVED
SEP 26 2019
PLANNING & DESIGN SERVICES

NO.	REVISION/SUBMISSIONS	DATE

SEAL

DESIGN ARCHITECT
RICKHAUS DESIGN
1469 South 4th Street Suite 310
Louisville, KY 40208
T. (502) 638-0534

OWNER
NEW CUT RD., LP
1469 S. 4TH STREET
LOUISVILLE, KY 40202
P: 502-638-0534

PROJECT TITLE
NEW CUT RD.
LOUISVILLE, KY

REVIEW SET

EXTERIOR ELEVATIONS	DATE 07/03/2019

SHEET TITLE
CLUBHOUSE ELEVATIONS

PROJECT NO.	SHEET NO.
19LD00-07	A211

19-DDP-0039

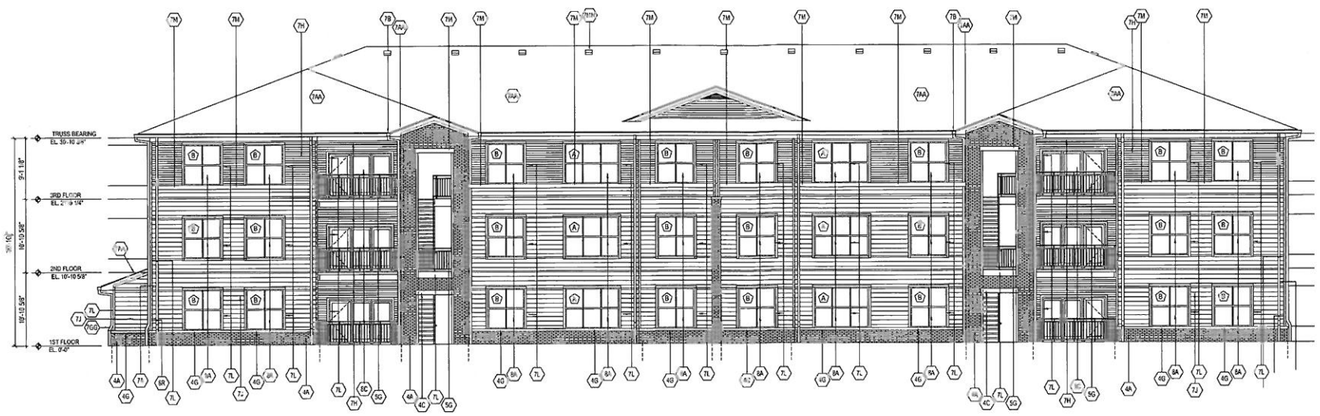

BLDG TYPE A
FRONT ELEVATION
SCALE: 1/8" = 1'-0"

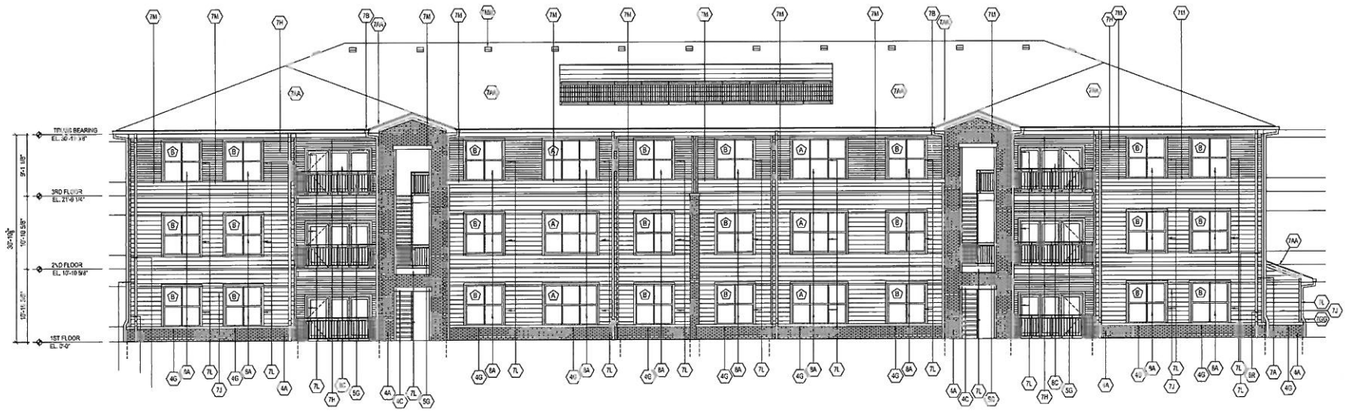

BLDG TYPE A
BACK ELEVATION
SCALE: 1/8" = 1'-0"

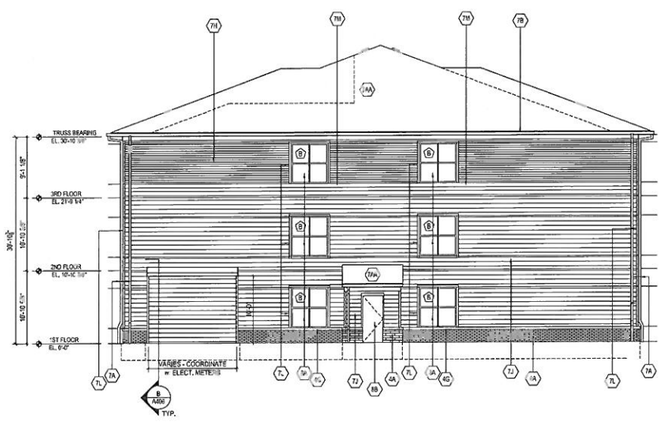

BLDG TYPE A
LEFT ELEVATION
SCALE: 1/8" = 1'-0"

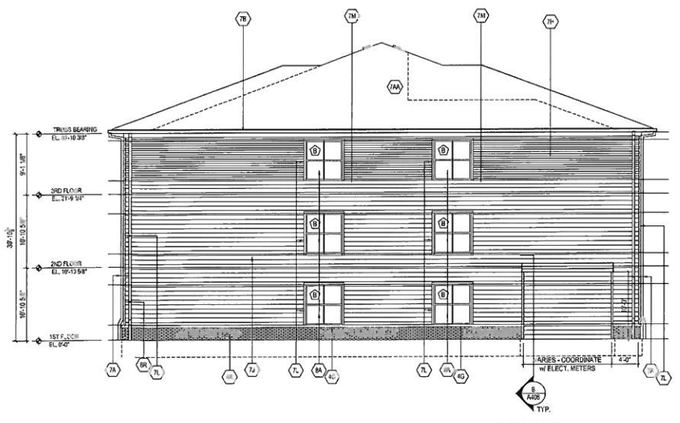

BLDG TYPE A
RIGHT ELEVATION
SCALE: 1/8" = 1'-0"

KEY NOTES:

1. GENERAL REQUIREMENTS NOT USED
2. SITE WORK:
   - 2A. SLOPE GRADE AWAY FROM BUILDING AT A MINIMUM SLOPE OF 5% FOR A MINIMUM OF 10'-0" FEET.
   - 2B. PERFORATED DRAINAGE STORM LINE, REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
3. CONCRETE:
   - 3A. 4" REINFORCED CONCRETE SLAB – REFER TO STRUCTURAL DRGS. FOR ADDITIONAL INFORMATION
   - 3B. CONCRETE SIDEWALK SLAB, SLOPE AWAY FROM BUILDING AT 1/4" PER FOOT. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3C. CONCRETE FOOTING, REFER TO STRUCTURAL DRAWING FOR ADDITIONAL INFORMATION.
   - 3D. 24"X12" CONCRETE
   - 3E. CONTINUOUS 1/2" COMPRESSIBLE EXPANSION JOINT WITH SEALANT
   - 3F. CONCRETE SIDEWALK, REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3G. LIGHTWEIGHT CONCRETE TOPPING OVER 6MIL MEMBRANE OVER SUBSTRATE
   - 3H. 6'-0" CURB W/ WHEEL STOP
4. MASONRY:
   - 4A. FACE BRICK (RUNNING BOND PATTERN) INSTALL STABLE MASONRY ANCHORS AT 16" O.C. VERTICALLY AND HORIZONTALLY. PROVIDE VERTICAL CONTROL JOINTS AT 16'-0" FROM INSIDE AND OUTSIDE CORNERS AND EVERY 25'-0" MAXIMUM OF STRAIGHT RUNS
   - 4B. MASONRY SOLDIER COURSE (EQUAL AT HEAD BACKER BOD) SHOWN DASHED
   - 4C. SOLDIER COURSE FACE BRICK HEADER - PROJECT 42"
   - 4D. CONT. THRU-WALL WEEPHOLE FLASHING WITH "WEEP" KEYS @ 24" O.C. PROVIDE CONTINUOUS TAPE SEAL FROM FLASHING TO WEATHER BARRIER ON SHEATHING
   - 4E. 8" CMU WALL, REINFORCED VERTICALLY & HORIZONTALLY @ 16" O.C. REFER TO STRUCTURAL DRAWINGS
   - 4F. CONST SOLID
   - 4G. HORIZ. LOCK COURSE FACE BRICK LEDGE, SLOPE AT 45 DEGREE ANGLE, PROVIDE SOLID MASONRY AT ENDS
   - 4H. PRE-CAST STONE CAP, INSTALL PER MANUFACTURER'S RECOMMENDATIONS
   - 4J. LINTEL - EXTEND 8" MIN. EA. SIDE OF OPENING - REFER TO STRUCTURAL FOR REINFORCING
5. METALS:
   - 5A. ANCHOR BOLTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5B. CURBROOF LESS, SHELF ANGLE @ 12" ON CENTER, 1 FASCH SIDE OF MASONRY OPENING, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5C. STAIR ASSY. HDLY, REFER TO STAIR DETAILS FOR ADDITIONAL INFORMATION
   - 5D. METAL POSTS GUARD RAILING W/ HANDRAIL - PAINT TO MATCH SW 7674
   - 5E. ELEVATOR PIT LADDER
   - 5F. ELEVATOR HOISTWAY BEAM, REFER TO STRUCTURAL DRAWINGS & ELEVATOR MANUFACTURER FOR ADDITIONAL INFORMATION.
   - 5G. DECORATIVE GUARDRAIL - SEE FABRICATION DETAILS
   - 5H. CONCRETE FILLED METAL PAN STAIR BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5J. 1-1/2" DIA. STL PAINTED GUARDRAIL & HANDRAIL ASSEMBLY BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5K. STAIR STRINGER BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5L. STAIR LANDING BY STAIR FABRICATOR - SEE FABRICATION DETAIL SHEET
   - 5M. 1-1/2" STL PROTECTIVE CHARCOAL BRUSH STAIN
   - 5N. STEEL COLUMN WRAPPED IN CEDAR TRIM BOARDS, REFER TO STRUCTURAL FOR ADDT. INFO.
   - 5P. 42" HIGH 1-1/2" DIA. GUARDRAIL - PRIMED AND PAINTED - SECURED TO ROOF - COLOR TO BE SELECTED BY ARCHITECT
   - 5R. CONTROL JOINT FLASHING
   - 5S. CONCRETE TOPPING AT BALCONY EDGE, SEE 5/A201
6. WOOD, PLASTICS AND COMPOSITES:
   - 6A. 2X6 WOOD STUD FRAMING @ 16" O.C. REFER TO STRUCTURAL
   - 6B. 2X6 WOOD SILL PLATE - PROVIDE TREATED LUMBER & CONTINUOUS SILL GASKET FIRST FLOOR ONLY. REFER TO STRUCTURAL
   - 6C. 2X10 WOOD STUD HEADER, REFER TO STRUCTURAL
   - 6D. DOUBLE 2X8 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   - 6E. OPEN WEB WOOD FLOOR JOISTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6F. OPEN WEB WOOD ROOF TRUSSES, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6G. KLAUER ZIP EXTERIOR WALL SHEATHING - TAPE ALL JOINTS PER ZIP SYSTEM FLASHING ZIP SYSTEM FLASHING TAPE - REFER TO STRUCTURAL DWGS FOR ADDITIONAL INFORMATION
   - 6H. 1X3 STRAPPING/FURRING - REFER TO STRUCTURAL DRAWINGS
   - 6J. DECORATIVE WOOD BASE, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION
   - 6K. DECORATIVE WOOD WINDOW SILL, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION
   - 6L. FIBER CEMENT PANELS OVER WOOD BLOCKING - REFER TO WALL DETAIL FOR ADDITIONAL INFORMATION
   - 6M. CONT. 2X8 EXTERIOR GRADE WOOD BLOCKING
   - 6N. FIBER CEMENT FASCIA BOARD OVER 2X WOOD BLOCKINGS
   - 6P. CONT. WOOD RAFTERS, REFER TO SUBSTRUCTURAL DRAWINGS
   - 6Q. HEADER BEAM, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6R. LINE OF STUD FRAMING
   - 6S. CONT. 2X10 TOP PLATE, CUT TO SIZE.
   - 6T. 6"Ø HOUGH CUT CEDAR POSTS. REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION.
   - 6U. CONT. 2X 12 ROUGH-CUT CEDAR JOISTS ON EACH SIDE OF POST W/ BOLT TO POST FOR STRUCTURAL DRAWINGS
   - 6V. [illegible] BEAMS, REFER TO STRUCTURAL DRAWINGS FOR SIZE AND ADDITIONAL INFORMATION.
   - 6W. PROVIDE 24" EXTERIOR GRADE PLYWOOD SHEATHING AS CATWALK PATH TO ROOFTOP ACCESS PANELS.
   - 6X. CONT. 2x6 ROUGH CUT CEDAR TRELLIS JOISTS (SPACED EQUALLY) NOTCH JOISTS AS REQUIRED. OVERLAP, SHINGLER, JOISTS, TOE SCREW ASSEMBLY TO GIRDER JOISTS.
   - 6Y. 2x 2 PRESSURE TREATED ROOF FRAMING - COORDINATE WITH STRUCTURAL DRAWINGS
   - 6Z. LINE OF STUD WALL FRAMING (SHOWN DASHED)
   - 6AA. WOOD TRELLIS, PAIR OF 3x12 PRESSURE TREATED WOOD MAIN BEAMS BOLTED TO CEDAR COLUMN WITH 2x12 PRESSURE TREATED WOOD CATCH TIES AT 16" O.C.
   - 6BB. 2x2 CEDAR WOOD TRELLIS ENCLOSURE AT 6" O.C. SECURE TO 2x6 CROSS TEES.
   - 6CC. 2x4 WOOD STUDS @ 16" O.C. REFER TO STRUCTURAL
   - 6DD. 2x4 TREATED SILL PLATE W/ CONTINUOUS SILL GASKET FIRST FLOOR ONLY, REFER TO STRUCTURAL
   - 6EE. DOUBLE 2X4 TREATED STUD TOP PLATE, REFER TO STRUCTURAL
   - 6FF. JOIST GIRDER - REFER TO STRUCTURAL
   - 6GG. 1/4" PLYWOOD CATWALK SHEATHING SECURED TO ROOF TRUSSES - PROVIDE CONTINUOUS WALKING SURFACE FROM ACCESS HATCH TO ROOF ACCESS PANEL
   - 6HH. ROOF WALKING PADS - COORDINATE WITH ROOFTOP EQUIPMENT
   - 6JJ. 1x6 ROUGH CUT CEDAR FASCIA, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION
   - 6KK. 1/4" CEDAR T&G PANELS - 45° PAINT STYLE - EVERSHUTT
   - 6LL. 6x10 ROUGH CUT CEDAR RAFTER, REFER TO STRUCTURAL DRAWINGS
   - 6MM. 6x12 ROUGH CUT CEDAR RIDGE POST, REFER TO STRUCTURAL DRAWINGS
7. THERMAL AND MOISTURE PROTECTION:
   - 7A. 6"x6" PRE-FINISHED METAL DOWNSPOUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7B. 8"X8" PRE-FINISHED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT. - ROUTE TO STORM PIPING SEE CIVIL DRAWINGS
   - 7C. R-19 FACED BATT INSULATION
   - 7D. FIBER CEMENT DOWICE, PAINTED (COLOR TO BE SELECTED BY ARCHITECT) REFER TO WALL SECTIONS AND DETAILS FOR ASSEMBLY.
   - 7E. BATT INSULATION - REFER TO DOOR/DOOR & RESIDENCE FOR R-VALUES
   - 7F. 5/16" T1-11, CEDAR FINISHED FIBER CEMENT PANEL BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7G. HORIZONTAL SEAM METAL WALL PANELS WITH CORNER (INSIDE OUTSIDE AND EDGE TRIM ASSEMBLIES) - SIZE OF DESIGN WITH METAL SALES PRODUCT TO BE INSTALL PER MFG'S RECOMMENDATIONS. COLOR TO BE SELECTED BY ARCHITECT
   - 7H. 4" NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7J. 6" NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7K. CEDAR FINISHED FIBER-CEMENT BOARD AND BATTEN SIDING @ 16" O.C. - COLOR TO BE SELECTED BY ARCHITECT.
   - 7L. 4" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7M. 8" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7N. FULLY ADHERED MEMBRANE ROOFING OVER 1/2" RIGID INSULATION OVER 3/4" EXTERIOR GRADE PLYWOOD SHEATHING W/ CLIPS, INSTALL PER MEMBRANE ROOFING MFR'S RECOMMENDATIONS.
   - 7P. MEMBRANE ROOF FLASHING, EXTEND OVER ROOF, UP AND OVER PARAPET WALL - INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
   - 7Q. ROOF GRADE 1 - FOAM FINISH BOARD BOARD, APPLY TYPICAL MEMBRANE ROOFING TO MATCH ROOF
   - 7R. MEMBRANE FLASH AND COUNTERFLOW METAL COUNTERFLASHING, EXTEND MEMBRANE UP 8" ALL MIN. UP.
   - 7S. PRE-FINISHED ALUMINUM COPING CAP, SLOPE 1/8" PER FOOT TOWARDS ROOF, COLOR TO BE SELECTED BY ARCHITECT. SEE WALL DETAILS FOR PARAPET CORNICE FABRICATION
   - 7T. CONTINUOUS PRE-FINISHED DRIP EDGE FLASHING, EXTEND UNDER EXTERIOR FINISH MIN. 4"
   - 7U. CONTINUOUS ALUMINUM REGLET WITH FASTENERS AT 16" O.C.
   - 7V. TWO PIECE FINISHED 5/8" THICK FIBER CEMENT PANELS - COLOR TO BE SELECTED BY ARCHITECT. WITH "HELOFLOW" ING METAL EDGE TRIMS AT FRY REGLET, VERTICAL JOINTS (FOR HORIZONTAL OR VERTICAL RETAINER WITH VERTICAL REGLET), HORIZONTAL JOINTS (FOR HORIZONTAL POP-OUT), OUTSIDE CORNERS (FOR OUTSIDE CAPS), INSIDE CORNERS (FOR INSIDE AND PANEL ENDS (FOR FLASHING). CONTRACTOR SHALL USE FRY REGLET DRIP CAPS ABOVE OPENINGS. CONTRACTOR SHALL MITER BACK TRIM (TOP AND BOTTOM) AT FIRST FLOOR BALCONY/PARAPET AND OTHER BOND CONTINUES BELOW. THE FIBER PANEL SIDING TRIM FINISH TO BE SELECTED BY ARCHITECT.
   - 7W. 24" DIA. BOTTOM VENTED WEEP DOWN DASHED - NOT USED ON EXTERIOR WALLS WHERE ZIP SHEATHING IS USED
   - 7X. R-19 FACED BATT INSULATION
   - 7Y. CONTINUOUS 2" RIGID INSULATION
   - 7Z. 3-1/2" BATT INSULATION
   - 7AA. ASPHALT COMPOSITE SHINGLES OVER #15 ROOF FELT OVER 5/8" EXTERIOR GRADE ROOF SHEATHING W/ CLIPS - REFER TO STRUCTURAL DRAWINGS
   - 7BB. ROUND LOUVER - LOUVER MODEL TYPICAL #RPL-16
   - 7CC. METAL ROOF FLASHING - EXTEND UNDER 5 SHINGLES AND UP WALL MIN. 8"
   - 7DD. RIDGE VENT
   - 7EE. UNUSED
   - 7FF. CONTINUOUS PRE-FINISHED ALUMINUM DRIP EDGE, INSTALL UNDER ASPHALT SHINGLES AND EXTEND DOWN OVER MEMBRANE FLASHING MIN. 3/4" C
   - 7GG. 6" WIDE PRE-FINISHED METAL LOUVER CUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7HH. 4" WIDE PRE-FINISHED RECTANGULAR METAL GUTTER. COLOR TO BE SELECTED BY ARCHITECT. - ROUTE TO STORM PIPING - SEE CIVIL DRAWINGS
   - 7JJ. METAL ROOFING
   - 7KK. CONTINUOUS INSULATION BAFFLE
   - 7LL. FAUX "RIDGE" LOUVER
   - 7MM. SLANT BACK ROOF LOUVER (MINIMUM OF 50 SQ. IN OF FREE VENTILATION AREA PER UNIT) - COLOR TO BE SELECTED BY ARCHITECT. PROVIDE ONE (1) SQ. FT OF FREE VENTILATION (REFER TO 124.10.1) AT GE ATTIC ALUM. RANGE. (LOUVER MODEL) INSTALL PER MFR'S RECOMMENDATIONS.
   - 7NN. "TRADE CHIEFE EXHAUST" HOOD
   - 7PP. 12" NOMINAL FIBER CEMENT TRIM BOARD/HOOP - COLOR TO BE SELECTED BY ARCHITECT.
   - 7QQ. 1x4 FIBER CEMENT TRIM BOARD OVER 1x2 EXTERIOR GRADE WOOD BLOCKING (CONTINUOUS AT DRYWALL EDGE
   - 7RR. VENTED SOFFIT PANEL - PROVIDE BLOCKING AS NECESSARY
   - 7SS. FIBER CEMENT TRIM BOARD - PROVIDE AS NECESSARY TO WRAP BEAM
   - 7TT. RECESSED HUB PRE-FINISHED METAL GUTTER
8. OPENINGS:
   - 8A. VINYL WINDOW UNIT WITH INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION. INSTALL PER MANUFACTURER'S INSTRUCTIONS
   - 8B. EXTERIOR INSULATED METAL DOOR AND FRAME ASSEMBLY, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION. PER MANUFACTURER'S INSTRUCTIONS
   - 8C. EXTERIOR HINGED PATIO DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8D. ALUMINUM STOREFRONT DOOR & WINDOW ASSEMBLY 1" THICK INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION
   - 8E. ALUMINUM STOREFRONT DOOR & WINDOW ASSEMBLY 1" THICK INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION
   - 8F. ALUMINUM SHUTTERS, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION
   - 8G. ALUMINUM LOUVER VENT - 32" X 16" ALUMINUM
   - 8H. OVERHEAD COILING DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION
   - 8J. 20" X 20" RATED EXTERIOR ACCESS PANEL - PAINT TO MATCH CEILING COLOR.
   - 8K. VINYL PICTURE WINDOW UNIT WITH INSULATED GLAZING AND INTERSEAL CHANNEL FLANGE. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8L. ALUMINUM WINDOW UNIT WITH INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8M. PULL-DOWN ALUMINUM STAIRCASE & ALUMINUM CLOSING STAIRWAY
9. FINISHES:
   - 9A. PAINT FLOOR, REFER TO PAINT FINISH SCHEDULE FOR ADDITIONAL INFO.
   - 9B. 1/2" TYPE 'X' GYPSUM WALL BOARD
   - 9C. 5/8" TYPE 'C' GYPSUM BOARD OVER 1/2" RESILIENT CHANNELS @ 16" O.C. (PROVIDE 4 LAYER FOR CEILING AND 3 LAYERS FOR ROOF)
   - 9D. 5/8" FIRE RATED EXTERIOR GYPSUM SOFFIT BOARD OVER 1/2" RESILIENT CHANNELS @ 24" O.C.
   - 9E. TWO LAYERS OF 5/8" TYPE 'X' GYPSUM BOARD OVER 2½" RESILIENT CHANNELS @ 24" O.C. OVER 5/8" TYPE 'X' GYPSUM SOFFIT PER UL U-377 FOR CEILING - 2HR RATING/HR
10. SPECIALTIES:
    - 10A. MECHANICAL VENTILATION LOUVER, REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
11. EQUIPMENT:
    - 11A. METAL WALL CLOSURE, REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION. INSTALL PER MFR. RECOMMENDATIONS.
    - 11B. ATTIC ACCESS HATCH
14. CONVEYING SYSTEMS
    - 14A. ELEVATOR - REFER TO ELEVATOR MANUFACTURER'S DRAWINGS
15. PLUMBING
    - 15A. DRINKING FOUNTAIN REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PROVIDE HEIGHT FOR COMPLIANT UNIT

ARCHITECT
Studio A, LLC
2330 FRANKFORT AVE
LOUISVILLE, KENTUCKY 40206
T:502.589.8007 | F:502.589.9004
WWW.STUDIOAARCH.COM

NOTE:
DOOR PLACEMENT:
UNLESS OTHERWISE DIMENSIONED ON PLANS, INSTALL DOORS PER THE FOLLOWING FINISH DIMENSIONS LISTED BELOW (FACE OF GYP. TO FACE OF GYP.):



NOTE:
1. DIMENSIONS ON PLANS ARE FROM FACE OF STUD FRAMING TO FACE OF STUD.
2. FRAMING/WINDOW & EXTERIOR DOOR LOCATIONS ARE SHOWN FOR REFERENCE ONLY. FOR EXACT WINDOW & DOOR LOCATIONS PLEASE REFER TO FLOOR DIMENSION PLANS.

KEY PLAN

RECEIVED
SEP 26 2019
PLANNING &
DESIGN SERVICES

NO.	REVISION/SUBMISSIONS	DATE

SEAL

DESIGN ARCHITECT
RICK HAUS DESIGN
1460 South 4th Street Suite 310
Louisville, KY 40208
T: (502) 638-0534

OWNER
NEW CUT RD., LP
1469 S. 4TH STREET
LOUISVILLE, KY 40202
P: 502-638-0534

PROJECT TITLE
NEW CUT RD.
LOUISVILLE, KY

REVIEW SET

EXTERIOR ELEVATIONS	DATE 07/03/2019

SHEET TITLE
BLDG. TYPE A

PROJECT NO.	SHEET NO.
19LD00-07	A201

19- DDP -0039

A A202

BLDG TYPE B
FRONT ELEVATION
SCALE: 1/8" = 1'-0"

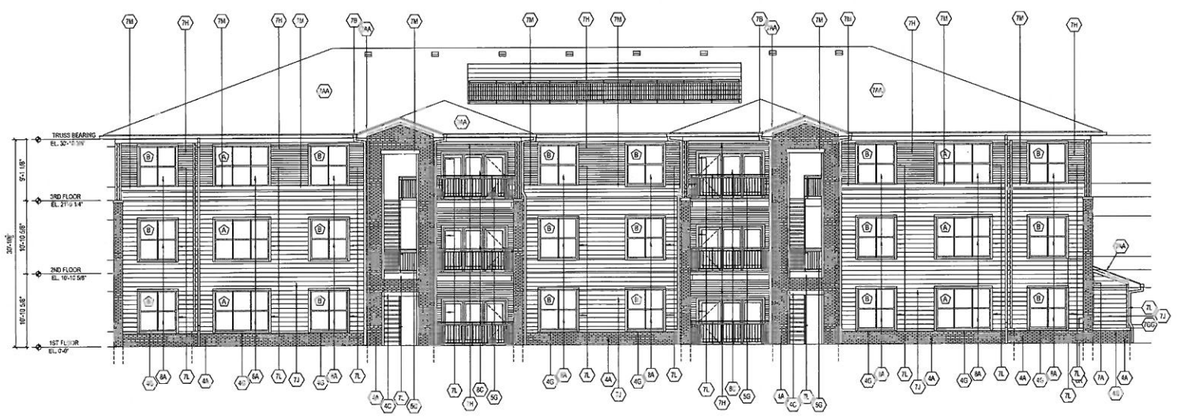

B A202

BLDG TYPE B
BACK ELEVATION
SCALE: 1/8" = 1'-0"

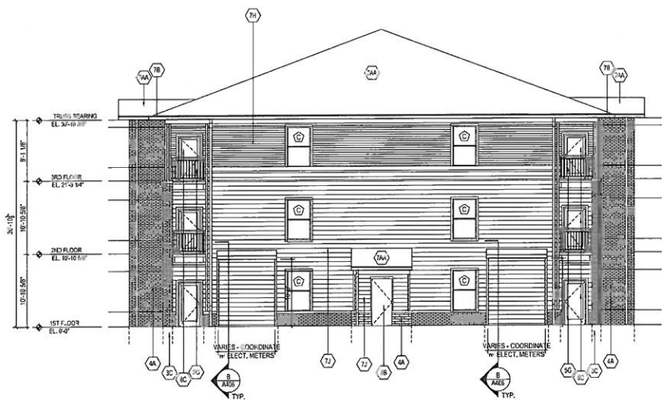

C A202

BLDG TYPE B
LEFT ELEVATION
SCALE: 1/8" = 1'-0"

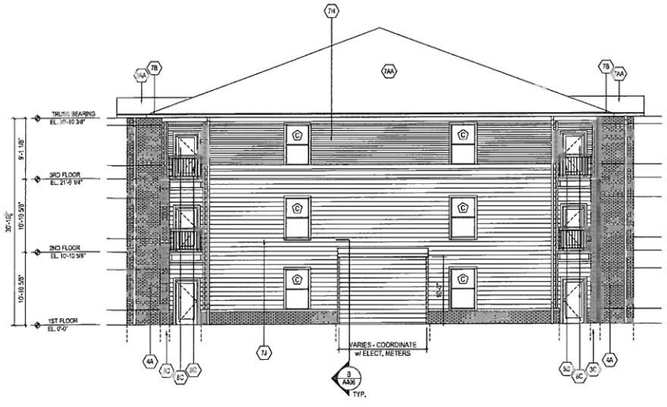

D A202

BLDG TYPE B
RIGHT ELEVATION
SCALE: 1/8" = 1'-0"

KEY NOTES:

1. GENERAL REQUIREMENTS: NOT USED
2. SITE WORK:
   - 2A. SLOPE GRADE AWAY FROM BUILDING AT A MINIMUM SLOPE OF 5% FOR A MINIMUM OF 10'-0" FEET.
   - 2B. PERFORM RATED DRAINAGE; STORM LINE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
3. CONCRETE:
   - 3A. 4" REINFORCED CONCRETE SLAB - REFER TO STRUCTURAL DRWGS. FOR ADDITIONAL INFORMATION
   - 3B. CONCRETE SIDEWALK SLOPE AWAY FROM BUILDING AT 1% - PER FOOT. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3C. CONCRETE FOOTING, REFER TO STRUCTURAL DRAWING FOR ADDITIONAL INFORMATION.
   - 3D. 3/4" DIA. CONCRETE
   - 3E. CONTINUOUS 1/2" COMPRESSIBLE EXPANSION JOINT WITH SEALANT
   - 3F. CONCRETE SIDEWALK, REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   - 3G. LIGHTWEIGHT CONCRETE TOPPING OVER 60MIL MEMBRANE OVER SUBSTRATE
   - 3H. 6" X 3" (TAPERED) STEP
4. MASONRY:
   - 4A. FACE BRICK (RUNNING BOND PATTERN) WITH ADJUSTABLE MASONRY ANCHORS AT 16" O.C. VERTICALLY AND HORIZONTALLY. PROVIDE MASONRY CONTROL JOINTS AT 16'-0" FROM INSIDE AND OUTSIDE CORNERS AND EVERY 20'-0" MAXIMUM OF STRAIGHT RUNS
   - 4B. MASONRY EXPANSION JOINT (SEALANT AND BACKER ROD) SATIN GRAY
   - 4C. SOLDIER COURSE FACE BRICK HEADER (TYP.)
   - 4D. CONT. THROUGH WALL WEEPS AT 16" O.C. WITH 3/8" DIA. WEEP VENTS @ 24" O.C. PROVIDE CONTINUOUS TAPE SEAL FROM FLASHING TO HEATHER BARRIER ON SHEATHING
   - 4E. IF CMU WALL, REINFORCED VERTICALLY AND HORIZONTALLY @ 16" O.C., REFER TO STRUCTURAL DRAWINGS
   - 4F. GROUT FILLED
   - 4G. 8 COURSE SOLDIER COURSE FACE BRICK LEDGE SLOPE AT 15 DEGREE ANGLE. PROVIDE SOLID BRICKS AT ENDS
   - 4H. PRE-CAST STONE CAP, 3/4" THICK, PER MANUFACTURER'S RECOMMENDATIONS
   - 4J. LINTEL - EXTEND 10" MIN. EA. SIDE OF OPENING - REFER TO STRUCTURAL FOR REINFORCING
5. METALS:
   - 5A. ANCHOR BOLTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5B. CONTINUOUS STEEL SHELF ANGLE - EXTEND MINIMUM 8" BEYOND EACH SIDE OF MASONRY OPENING, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 5C. STAIR ASSEMBLY, REFER TO STAIR DETAILS FOR ADDITIONAL INFORMATION
   - 5D. METAL PIPE RAILING W/ HANDRAIL - REFER TO STAIR DETAIL 5
   - 5E. ELEVATOR PIT LADDER
   - 5F. ELEVATOR HOIST BEAM - REFER TO STRUCTURAL DRAWINGS & ELEVATOR MANUFACTURER FOR ADDITIONAL INFORMATION.
   - 5G. DECORATIVE METAL RAIL - SEE FABRICATION DETAILS
   - 5H. CONCRETE FILLED METAL PAN STAIR BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5J. 1-1/2" DIA. STL PAINTED GUARDRAIL & MANUFAC. ASSEMBLY @ STAIR FABRICATION, SEE FABRICATION DETAIL SHEET
   - 5K. STAIR STRINGER BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5L. STAIR LANDING BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   - 5N. 1-1/2" STL PROTECTIVE GUARDRAIL UNDER STAIR
   - 5Q. STEEL COLUMN WRAPPED IN CEDAR TRIM BOARDS, REFER TO STRUCTURAL FOR ADDIT. INFO.
   - 5P. 42" HIGH 1-1/2" DIA. GUARDRAIL - PRIMED AND PAINTED - SECURED TO ROOF - COLOR TO BE SELECTED BY ARCHITECT
   - 5R. CORNER AIR FLASHING
   - 5J. CONCRETE FILLED 4" BALCONY EDGE, SEE P 111/2
6. WOOD, PLASTICS AND COMPOSITES:
   - 6A. 2X6 WOOD STUD FRAMING @ 16" O.C. REFER TO STRUCTURAL
   - 6B. TREATED SILL PLATE - PROVIDE TREATED LAMINATE COVERING OF 2X6 @ WEST FIRST FLOOR ONLY. REFER TO STRUCTURAL
   - 6C. 2X10 WOOD LOAD HEADER, REFER TO STRUCTURAL
   - 6D. DOUBLE 2X6 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   - 6E. OPEN WEB WOOD FLOOR JOISTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6F. OPEN WEB WOOD ROOF TRUSSES, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6G. HOUSE WRAP ZIP (WEATHER RESISTIVE BARRIER) SHEATHING - TAPE ALL JOINTS PER ZIP SYSTEM USING ZIP SYSTEM FLASHING TAPE - REFER TO STRUCTURAL DRWGS FOR ADDITIONAL INFORMATION
   - 6H. 7/16 THK PLYWOOD SHEATHING - REFER TO STRUCTURAL DRAWINGS
   - 6J. 5/4 X 6 WOOD BOARDS, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   - 6K. DECORATIVE WOOD WINDOW SILL, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   - 6L. FIBER CEMENT PANELS OVER WOOD BLOCKING, REFER TO FULL DETAIL FOR ADDITIONAL INFORMATION
   - 6M. CONT. 2X8 EXTERIOR GRADE WOOD BLOCKING
   - 6N. FIBER CEMENT FASCIA BOARD OVER 2X WOOD BLOCKING
   - 6P. CONT. WOOD RIM JOIST, REFER TO STRUCTURAL DRAWINGS
   - 6Q. HOUSE WRAP, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   - 6R. LINE OF STUD FRAMING.
   - 6S. CONT. 2X10 TOP PLATE CUT TO SLOPE
   - 6T. 5 1/4 X 6 ROUGH CUT CEDAR POSTS. REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION.
   - 6U. CONT. 2 X 12 ROUGH CUT CEDAR JOISTS ON EACH SIDE OF POSTS, BOLT TO POST FOR STRUCTURAL ENGINEER. REFER TO STRUCTURAL DRAWINGS FOR SIZE AND ADDITIONAL INFORMATION.
   - 6V. 1 1/4 BEAM, REFER TO STRUCTURAL DRAWINGS FOR SIZE AND ADDITIONAL INFORMATION.
   - 6W. PREFINISHED EXTERIOR GRADE PLYWOOD SHEATHING AS CATALOGUED IN ROOFTOP ACCESS PANELS.
   - 6X. CONT. 2X6 ROUGH CUT CEDAR TRELLIS JOISTS (SPACED EQUALLY) NOTCH JOISTS AS REQUIRED OVERHANG, STRINGER, JOISTS, TOE BOARD ASSEMBLY TO TWOOD JOIC 3L
   - 6Y. 2X12 PRESSURE TREATED ROOF FRAMING - COORDINATE WITH STRUCTURAL DRAWINGS
   - 6Z. LINE OF STUD WALL FRAMING (CHOW HASHED)
   - 6AA. WOOD TRELLIS, MADE OF 2x12 WESTERN CEDAR W/ CED MAIN BEAMS BOLTED TO CEDAR COLUMNS WITH 2x12 WESTERN CEDAR WOOD CROSS TEES AT 1'-0" O.C.
   - 6BB. 2x2 CEDAR WOOD TRELLIS ENDS WITH 6" BEARS @ O.C. SECURE TO 2-6 CROSS TEES.
   - 6CC. 2x4 IN CLUD STUDS @ 16" O.C. REFER TO STRUCTURAL
   - 6DD. 2x4 WOOD SILL PLATE W/ CONTINUOUS SILL GASKET (FIRST FLOOR ONLY) REFER TO STRUCTURAL
   - 6EE. 6TH THK 2X4 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   - 6FF. JOIST GIRDER - REFER TO STRUCTURAL
   - 6GG. 1/2" PLYWOOD CLIP TRACK SHEATHING SECURED TO ROOF TRUSSES. - PROVIDE CONTINUOUS SHEATHING SURFACE FROM ACCESS HATCH TO ROOF ACCESS PANEL
   - 6HH. ROOF WALKING PADS - COORDINATE WITH ROOFTOP EQUIPMENT
   - 6JJ. 5/4 ROUGH CUT CEDAR RAFTER, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION
   - 6KK. 4.5" CEDAR TRIM PANELS - KEY BAY STYLE - EVEN BUTT
   - 6LL. 1 1/4 ROUGH CUT CEDAR RAFTER, REFER TO STRUCTURAL DRAWINGS
   - 6MM. 5 1/2 ROUGH CUT CEDAR RIDGE POST, REFER TO STRUCTURAL DRAWINGS
7. THERMAL AND MOISTURE PROTECTION:
   - 7A. 6"x6" PRE-FINISHED METAL DOWNSPOUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7B. 6" WIDE PRE-FINISHED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT. - ROUTE TO STORM PIPING, SEE CIVIL DRAWINGS
   - 7C. NON-UNIFORM BATT INSULATION
   - 7D. FIBER-CEMENT CORNICE, PAINTED (COLOR TO BE SELECTED BY ARCHITECT) REFER TO WALL SECTIONS AND DETAILS FOR ASSEMBLY.
   - 7E. BATT INSULATION - REFER TO LUNCHBOX & RESTAURANT FOR R VALUES
   - 7F. 5/4 THK. CEDAR FINISHED FIBER-CEMENT PANEL BOARD - COLOR TO BE SELECTED BY ARCHITECT.
   - 7G. HORIZONTAL .032A METAL WALL PANELS WITH CORNER INSIDE, OUTSIDE AND EDGE TRIM ASSEMBLIES - BASIS OF DESIGN MFR METAL SALES PRODUCTS TO INSTALL PER MFRS RECOMMENDATIONS. - COLOR TO BE SELECTED BY ARCHITECT
   - 7H. 4" NOMINAL FIBER CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7J. 6" NOMINAL FIBER CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7K. CEDAR FINISHED FIBER-CEMENT BOARD AND BATTEN SIDING @ 16" O.C. - COLOR TO BE SELECTED BY ARCHITECT.
   - 7L. 4" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7M. 8" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   - 7N. FULLY ADHERED MEMBRANE ROOFING OVER 1/2" RATED REGULATORY OVER 3/4" EXTERIOR GRADE PLYWOOD SHEATHING W/ CLIPS, INSTALL PER MANUFACTURERS RECOMMENDATIONS. COLOR TO BE SELECTED BY ARCHITECT
   - 7P. MEMBRANE ROOF FLASHING, EXTEND OVER ROOF, UP AND OVER PARAPET WALL - INSTALL PER MANUFACTURERS RECOMMENDATIONS
   - 7Q. ROOF UNDERLAYMENT - FORM FROM RESIN BONDED APPLY TYPICAL MEMBRANE ROOFING TO MATCH ROOF
   - 7R. VENTED SOFFIT PANEL AND TRIM AT EAVES (SOFFIT VENTING OCCURRING WITH SOFFIT PANELS)
   - 7S. PRE-FINISHED ALUMINUM COPING CAP, SLOPE 1/8" PER FOOT TOWARDS INTERIOR, COLOR TO BE SELECTED BY ARCHITECT, SEE WALL DETAILS FOR PARAPET CONDUCT FABRICATION
   - 7T. CONTINUOUS PRE-FINISHED DRIP EDGE FLASHING, EXTEND UNDER EXTERIOR FINISH MIN. 4"
   - 7U. CONTINUOUS ALUMINUM RESILIENT FURRING STRIPS - FASTENERS AT 12" O.C.
   - 7V. SMOOTH FINISHED 5/16" THICK FIBER-CEMENT PANELS - COLOR TO BE SELECTED BY ARCHITECT. TYP. THROUGH THE FACE OF ALL METAL EDGE TRIMS. TYP. AT ALL REGULAR CONTROL JOINTS (FOR VERTICAL JOINTS AT PARAPET WALL RETAINER WITH VERTICAL INSERT), HORIZONTAL JOINTS (DOUBLE HORIZONTAL FURRING STRIPS), OUTSIDE CORNERS (CPG OUTSIDE CORNER), INSIDE CORNERS (CPG INSIDE CORNER) AND PANEL ENDS (FOR ACHIEVING CONTRACTOR SHALL USE FIELD CUT DRIP CAPS ABOVE OPENING. CONTRACTOR SHALL USE BASE TRIM AT GRADE AT FIRST FLOOR ELEVATION ONLY AND OTHER TRIMS CONTINUES BELOW THE FIBER PANEL SIDING. TRIM FINISH TO BE SELECTED BY ARCHITECT.
   - 7W. WEATHER BARRIER PAPER (SHOWN FLASHED) - NOT USED ON EXTERIOR WALLS WHEN ZIP SHEATHING IS USED
   - 7X. R-VALUE FACED BATT INSULATION
   - 7Y. CONTINUOUS FOAM INSULATION
   - 7Z. 3-1/2" BATT INSULATION
   - 7AA. ASPHALT COMPOSITE SHINGLES OVER #15 ASTM FELT OVER EXTERIOR GRADE PLYWOOD SHEATHING W/ CLIPS - REFER TO STRUCTURAL DRAWINGS
   - 7BB. ROOF LOUVER, LOUVER MODEL - PITCH APPX. 18
   - 7CC. METAL ROOF FLASHING, EXTEND UNDER SHINGLES AND UP WALL APX 8"
   - 7DD. RIDGE VENT
   - 7EE. UNUSED
   - 7FF. CONTINUOUS PRE-FINISHED ALUMINUM DRIP EDGE, INSTALL UNDER ASPHALT SHINGLES AND EXTEND OVER ROOF MEMBRANE FLASHING MIN. OF 4"
   - 7GG. 6" DIA. PRE-FINISHED METAL DOWNSPOUT, COLOR TO BE SELECTED BY ARCHITECT
   - 7HH. 6" WIDE PRE-FINISHED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT. - ROUTE DOWNSPOUT TO STORM PIPING, SEE CIVIL DRAWINGS
   - 7JJ. METAL ROOFING
   - 7KK. CONTINUOUS INSULATION BAFFLE
   - 7LL. GABLE TRIANGLE LOUVER
   - 7MM. PLANT BACK ROOF LOUVER - MINIMUM OF 50 SQ. IN. OF FREE VENTILATION AREA PER VENT) - COLOR TO BE SELECTED BY ARCHITECT. PROVIDE ONE (1) SQ. FT OF FREE VENTILATION PER 1,000 SQ. FT OF ATTIC FLOOR SPACE. DUCT INSTALL VENT PER MFRS RECOMMENDATIONS.
   - 7NN. TRASH CHUTE EXHAUST HOOD
   - 7PP. 10" NOMINAL FIBER CEMENT TRIM BOARDS - "COLOR" TO BE SELECTED BY ARCHITECT.
   - 7QQ. 5/4 FIBER CEMENT TRIM BOARD OVER HORIZONTAL FURRING STRIPS AT GRADE TO ACCEPT SIDING, CONTINUOUS AT DRYWALL EDGE
   - 7RR. VENTED SOFFIT PANEL - PROVIDE BLOCKING AS NECESSARY
   - 7SS. FIBER CEMENT TRIM BOARDS - PROVIDE AS REQUIRED FOR TYP. WRAP BEAM
   - 7TT. RECESSED 6x6 PRE-FINISHED METAL GUTTER
8. OPENINGS:
   - 8A. VINYL WINDOW UNIT WITH INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION. INSTALL PER MANUFACTURERS INSTRUCTIONS
   - 8B. EXTERIOR INSULATED METAL DOOR AND FRAME ASSEMBLY - REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION. PER MANUFACTURER'S INSTRUCTIONS
   - 8C. EXTERIOR HINGED PATIO DOOR. REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8D. ALUMINUM THRESHOLD, PAINT (SEE MFR. 2 SEASS OF PAINT, SEALANT UNDER THRESHOLD)
   - 8E. ALUMINUM STOREFRONT DOOR & WINDOW ASSEMBLY 1" THICK INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION
   - 8F. ELEVATOR SHAFT VENT - 22" X 14" ALUMINUM
   - 8H. OVERHEAD COILING DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION
   - 8J. 30" X 54" INSULATED EXTERIOR ACCESS PANEL, PAINT MINIMUM CEILING COLOR.
   - 8L. VINYL PICTURE WINDOW UNIT WITH INSULATED GLAZING AND INTERIOR CHANNEL FLANGE. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8K. ALUMINUM WINDOW UNIT WITH INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   - 8L. FULL DOOR CORNER UNIT, GRADE A, ALUMINUM HOLDING SMITHY
9. FINISHES:
   - 9A. FINISH FLOOR, REFER TO ROOF FINISH SCHEDULE FOR ADDITIONAL INFO.
   - 9B. 5/8" TYPE "X" GYPSUM WALL BOARD
   - 9C. 2X6 TYPE "C" GYPSUM BOARD OVER 1/2" RESILIENT CHANNELS @ 16" O.C. PER UL # U467 FOR CEILING AND U.L. # P522 FOR ROOF.
   - 9D. 5/8" FIRE RATED EXTERIOR GYPSUM SOFFIT BOARD OVER 1/2" RESILIENT CHANNELS @ 16" O.C.
   - 9E. TWO LAYERS OF 5/8" TYPE "X" GYPSUM BOARD OVER RESILIENT CHANNELS @ 12" O.C. OVER 5/8" TYPE "X" GYPSUM BOARD (PER UL # U 372 FOR CEILING - 2HR ASSEMBLY
10. SPECIALTIES:
    - 10A. MECHANICAL VENTILATION LOUVER, REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
11. EQUIPMENT:
    - 11A. METAL WALBOX UNIT, REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION. INSTALL PER MFR. RECOMMENDATIONS.
    - 11B. ROOF ACCESS HATCH
14. CONVEYING SYSTEMS:
    - 14A. ELEVATOR - REFER TO ELEVATOR MANUFACTURERS DRAWINGS
15. PLUMBING:
    - 15A. DRINKING FOUNTAIN, REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION. PROVIDE ANSI/ADA COMPLIANT UNIT.

ARCHITECT
Studio A, LLC
2330 FRANKFORT AVE
LOUISVILLE, KENTUCKY 40206
T:502.589.8007 / F:502.589.8004
WWW.STUDIOAARCH.COM

NOTE:

DOOR PLACEMENT:
UNLESS OTHERWISE DIMENSIONED ON PLANS, INSTALL DOORS PER THE FOLLOWING FINISH DIMENSIONS LISTED BELOW (FACE OF GWB TO FACE OF GWB):



NOTE:

1. DIMENSIONS ON PLANS ARE FROM FACE OF STUD FRAMING TO FACE OF STUD.
2. FRAMING,WINDOW & EXTERIOR DOOR LOCATIONS ARE SHOWN FOR REFERENCE ONLY. FOR EXACT WINDOW & DOOR LOCATIONS PLEASE REFER TO FLOOR DIMENSION PLANS.

KEY PLAN

NO.	REVISION/SUBMISSIONS	DATE

SEAL

RECEIVED
SEP 20 2019
PLANNING & DESIGN SERVICES

DESIGN ARCHITECT
RICKHAUS DESIGN
1469 South 4th Street Suite 310
Louisville, KY 40208
T: (502) 638-0534

OWNER
NEW CUT RD., LP
1469 S. 4TH STREET
LOUISVILLE, KY 40202
P: 502-638-0534

PROJECT TITLE
NEW CUT RD.
LOUISVILLE, KY

REVIEW SET

EXTERIOR ELEVATIONS	DATE 07/03/2019

SHEET TITLE
BLDG. TYPE B

PROJECT NO.	SHEET NO.
19LD00-07	A202

19 - DDP - 0059

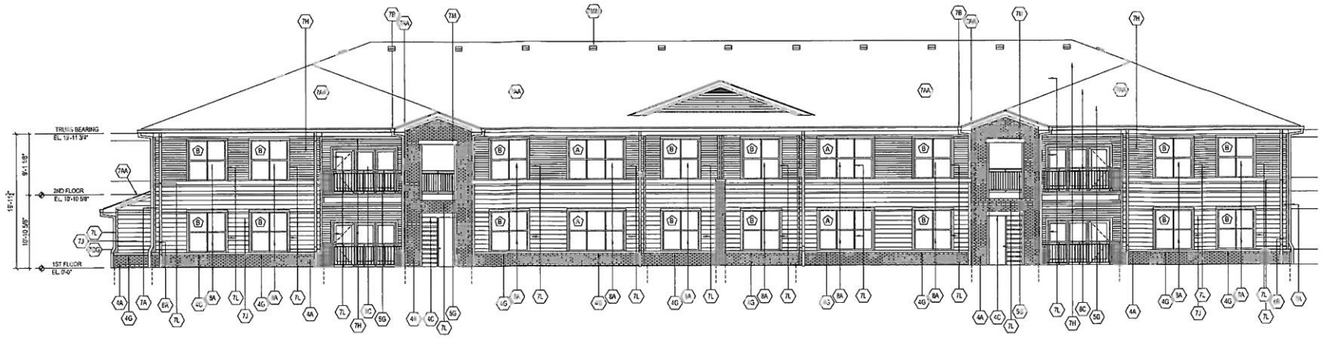

BLDG TYPE C
A/A203 FRONT ELEVATION
SCALE: 1/8" = 1'-0"

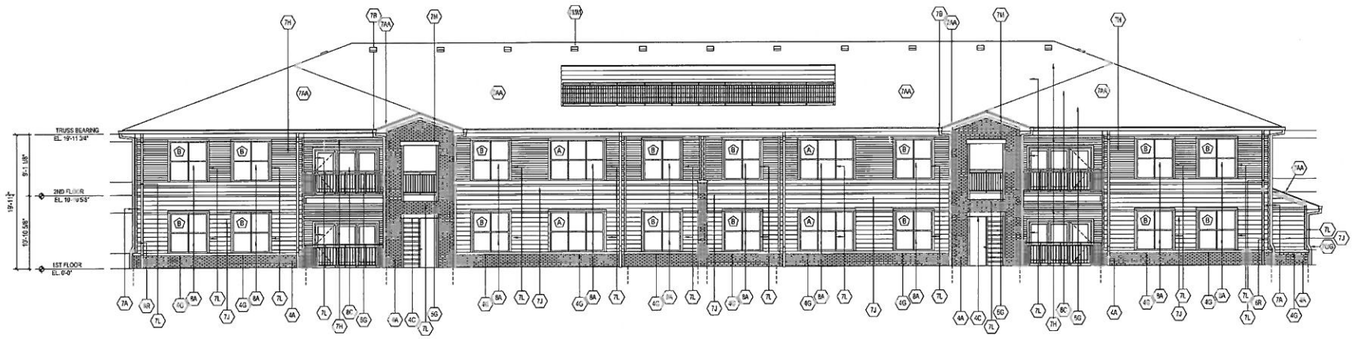

BLDG TYPE C
B/A203 BACK ELEVATION
SCALE: 1/8" = 1'-0"

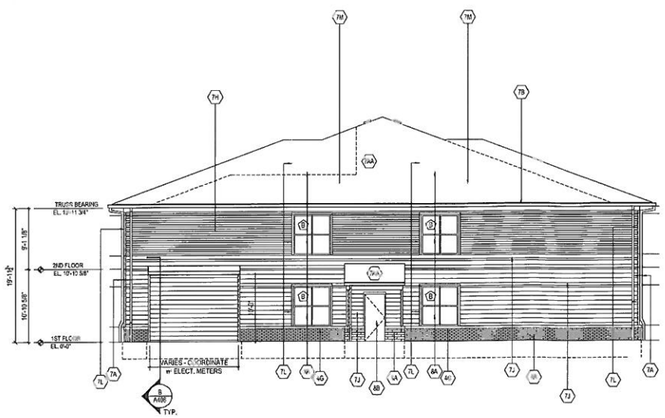

BLDG TYPE C
C/A203 LEFT ELEVATION
SCALE: 1/8" = 1'-0"

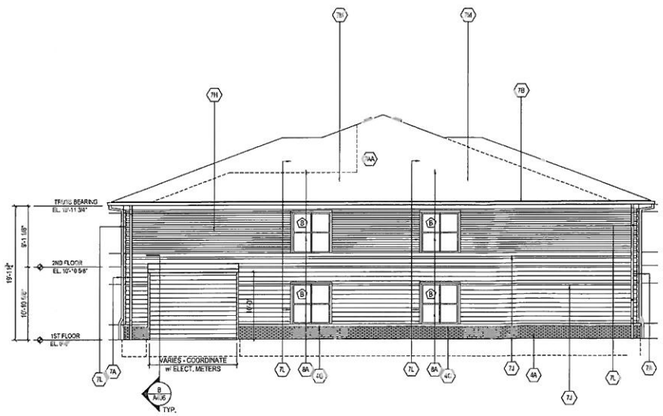

BLDG TYPE C
D/A203 RIGHT ELEVATION
SCALE: 1/8" = 1'-0"

ARCHITECT

Studio A, LLC
2330 FRANKFORT AVE
LOUISVILLE, KENTUCKY 40206
T:502.589.8007 : F:502.589.8004
WWW.STUDIOAARCH.COM

NOTE:

DOOR PLACEMENT:
UNLESS OTHERWISE DIMENSIONED ON PLANS, INSTALL DOORS PER THE FOLLOWING FINISH DIMENSIONS LISTED BELOW (FACE OF GWB TO FACE OF GWB):



NOTE:

1. DIMENSIONS ON PLANS ARE FROM FACE OF STUD FRAMING TO FACE OF STUD.
2. FRAMING WINDOW & EXTERIOR DOOR LOCATIONS ARE SHOWN FOR REFERENCE ONLY. FOR EXACT WINDOW & DOOR LOCATIONS PLEASE REFER TO FLOOR DIMENSION PLANS.

KEY PLAN

NO.	REVISION/SUBMISSIONS	DATE

SEAL

RECEIVED
SEP 26 2019
PLANNING & DESIGN SERVICES

DESIGN ARCHITECT

RICKHAUS DESIGN
1469 South 4th Street Suite 310
Louisville, KY 40206
T: (502) 638-0534

OWNER

NEW CUT RD., LP
1469 S. 4TH STREET
LOUISVILLE, KY 40202
P: 502-638-0534

PROJECT TITLE

NEW CUT RD.
LOUISVILLE, KY

REVIEW SET

EXTERIOR ELEVATIONS	DATE 07/03/2019

SHEET TITLE

BLDG. TYPE C

PROJECT NO.	SHEET NO.
19LD00-07	A203

19-RUP DDP -0039

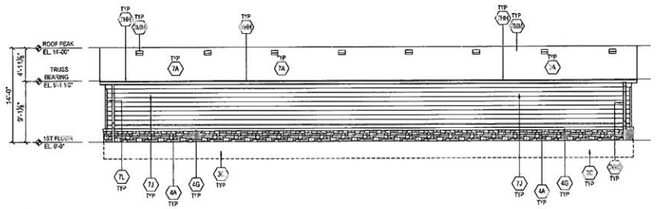

3 / A141 — 6 CAR GARAGE
GARAGE - ELEVATION
SCALE: 1/8" = 1'-0"

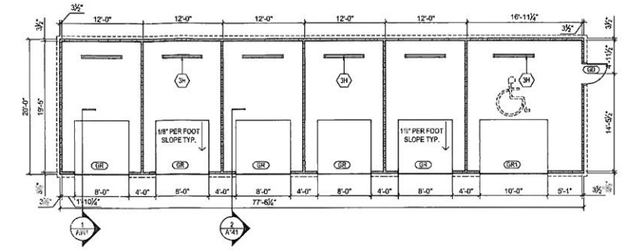

1 / A141 — 6 CAR GARAGE
GARAGE - FLOOR PLAN
SCALE: 1/8" = 1'-0"

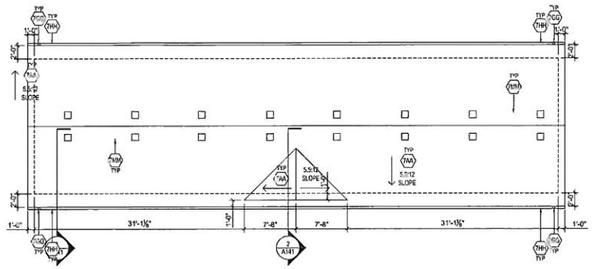

2 / A141 — 6 CAR GARAGE
GARAGE - ROOF PLAN
SCALE: 1/8" = 1'-0"

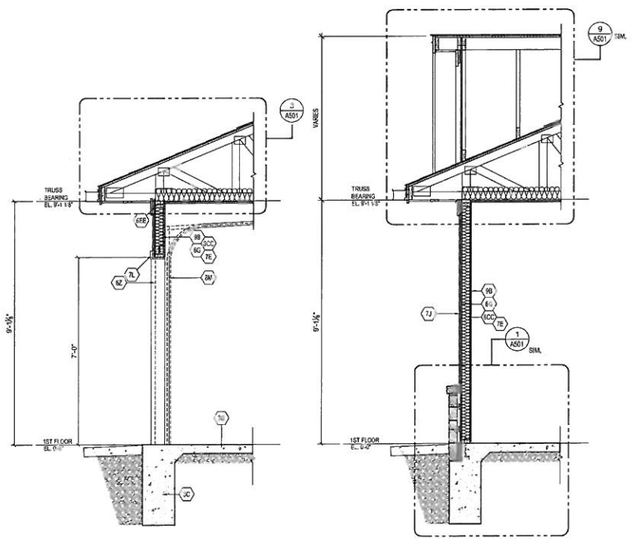

A / A141 — 6 CAR GARAGE
GARAGE - WALL SECTION
SCALE: 1/2" = 1'-0"

B / A141 — 6 CAR GARAGE
GARAGE - WALL SECTION
SCALE: 1/2" = 1'-0"

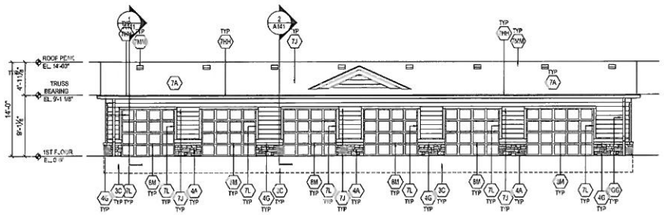

3 / A141 — 6 CAR GARAGE
GARAGE - ELEVATION
SCALE: 1/8" = 1'-0"

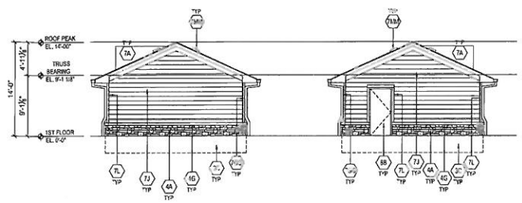

4 / A141 — 6 CAR GARAGE
GARAGE - ELEVATION
SCALE: 1/8" = 1'-0"

5 / A141 — 6 CAR GARAGE
GARAGE - ELEVATION
SCALE: 1/16" = 1'-0"

KEY NOTES:

1. GENERAL REQUIREMENTS: NOT USED
2. SITE WORK:
   2A. SLOPE GRADE AWAY FROM BUILDING AT A MINIMUM SLOPE OF 5% FOR A MINIMUM OF TEN FEET.
   2B. PERFORATED DRAINAGE STORM LINE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
3. CONCRETE:
   3A. 4" REINFORCED CONCRETE SLAB - REFER TO STRUCTURAL DRWGS. FOR ADDITIONAL INFORMATION
   3B. CONCRETE SIDEWALK SLAB: SLOPE AWAY FROM BUILDING AT ¼" PER FOOT. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   3C. CONCRETE FOOTING: REFER TO STRUCTURAL DRAWING FOR ADDITIONAL INFORMATION.
   3D. 3/4" HYPERJOINT.
   3E. CONTINUOUS KEY CONTROL/EXPANSION JOINT WITH SEALANT
   3F. CONCRETE VENEER: REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION
   3G. LIGHTWEIGHT CONCRETE TOPPING OVER ROOF SHEATHING OR DECK SUBSTRATE
   3H. 6-0" TOP TRADES STEP
4. MASONRY:
   4A. FACE BRICK (RUNNING BOND PATTERN) WITH ADJUSTABLE MASONRY ANCHORS AT 16" O.C. VERTICALLY AND HORIZONTALLY. PROVIDE MASONRY CONTROL JOINTS AT 16' FROM INSIDE AND OUTSIDE CORNERS AND EVERY 25'-0" MINIMUM OF STRAIGHT RUNS
   4B. MASONRY EXPANSION ZONE (SEE ARCH AND MECHANICAL FOR ROOF PENETRATIONS)
   4C. SOLDIER COURSE FACE BRICK HEADER + PROJECT 2"
   4D. CONT. THRU WALL MOISTURE FLASHING WITH WEEP VENTS @ 24" O.C. PROVIDE CONTINUOUS TAPE SEAL FROM FLASHING TO WEATHER BARRIER ON SHEATHING
   4E. 2" THRU WALL, REINFORCED VERTICALLY & HORIZONTALLY @ 16" O.C., REFER TO STRUCTURAL DRAWINGS
   4F. GROUT SOLID
   4G. ROWLOCK COURSE FACE BRICK LEDGE, SLOPE AT 15 DEGREE ANGLE. PROVIDE SOLID BRICKS AT ENDS
   4H. PRE-CAST STONE CAP, INSTALL PER MANUFACTURER'S RECOMMENDATIONS
   4I. LINTEL - EXTEND 12" MIN. EA. SIDE OF OPENING - REFER TO STRUCTURAL FOR REINFORCING
5. METALS:
   5A. ANCHOR BOLTS, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   5B. CONTINUOUS STEEL SHELF ANGLE EXTENDED 6" GREATER OF MASONRY OPENING, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   5C. STAIR ASSEMBLY: REFER TO STAIR DETAILS FOR ADDITIONAL INFORMATION
   5D. METAL PICKET GUARD RAILING W/ HANDRAIL - REFER TO STAIR DETAILS
   5E. ELEVATOR PIT LADDER
   5F. ELEVATOR HOIST BEAM, REFER TO STRUCTURAL DRAWINGS & ELEVATOR MANUFACTURER FOR ADDITIONAL INFORMATION.
   5G. DECORATIVE GUARDRAIL - SEE FABRICATION DETAILS
   5H. CONCRETE FILLED METAL PAN STAIR BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   5I. "METAL STL PAINTED GUARDRAIL & HANDRAIL ASSEMBLY" BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   5J. STAIR STRINGER BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   5K. STAIR LANDING BY STAIR FABRICATOR, SEE FABRICATION DETAIL SHEET
   5L. 4x12 STL PROJECTING SUNSHADE, LOCKER STAIR
   5M. STEEL COLUMN WRAPPED IN CEDAR TRIM BOARDS, REFER TO STRUCTURAL FOR ADDT. INFO.
   5P. 42" HIGH PAINTED STL GUARDRAIL - PAINTED AND FASTENED - SECURED TO ROOF - COLOR TO BE SELECTED BY ARCHITECT
   5R. CONTINUOUS E.F.FLASHING
   5S. CONCRETE TRAILER BALCONY SLAB, SEE 3 / A142
6. WOOD, PLASTICS AND COMPOSITES
   6A. 2x6 WOOD STUD FRAMING @ 16" O.C. REFER TO STRUCTURAL
   6B. 2X4 W/ 2 SILL PLATE - PRIVATE TREATED LUMBER & CONTINUOUS SILL CAULK - FIRST FLOOR ONLY. REFER TO STRUCTURAL
   6C. 2X10 WOOD STUD HEADER, REFER TO STRUCTURAL
   6D. DOUBLE 2x6 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   6E. ORIENTED WOOD I-JOIST JOISTS. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   6F. ORIENTED WOOD ROOF TRUSSES. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   6G. NUDEF TIP SHEETER WALL SHEATHING - TAPE ALL JOINTS PER CP 01 AND USING ZIP SYSTEM FLASHING TAPE - REFER TO STRUCTURAL DRWGS FOR ADDITIONAL INFORMATION
   6H. USE BOX BEAM
   6I. DECORATIVE WOOD BASE, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   6K. DECORATIVE WOOD WINDOW SILL, REFER TO FINISH SCHEDULE FOR ADDITIONAL INFORMATION.
   6L. FIBER CEMENT PANELS OVER WOOD BLOCKING, REFER TO WALL DETAIL FOR ADDITIONAL INFORMATION
   6N. CONT. 2X FIBER CEMENT GRADE WOOD BLOCKING.
   6O. FIBER CEMENT FASCIA BOARD OVER 2X IN WIDE BLOCKING.
   6P. CONT. WOOD RIM JOIST, REFER TO STRUCTURAL DRAWINGS
   6Q. WOOD BLOCKING, REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
   6L. LINE OF STUD FRAMING.
   6U. CONT. 2X10 TOP PLATE, CUT TO SIZE.
   6T. 6 x 6 ROUGH CUT CEDAR POSTS, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION.
   6U. CONT. 2 X 12 ROUGH CUT CEDAR JOIST ON EACH SIDE OF POSTS, BOLT TO POST PER STRUCTURAL DRAWINGS
   6V. LVL BEAMS, REFER TO STRUCTURAL DRAWINGS FOR SIZE AND ADDITIONAL INFORMATION.
   6W. PROVIDE 3/4" EXTERIOR GRADE PLYWOOD SHEATHING AS CATWALK PATH TO ROOFTOP ACCESS PANELS.
   6X. CONT. 2x6 ROUGH CUT CEDAR TRELLIS JOISTS SPACED EQUALLY) NOTCH JOISTS AS REQUIRED. DO NOT NAIL STAGGER JOISTS, TOE SCREW ASSEMBLY TO GIRDER JOISTS.
   6Y. 2x 2 PRESSURE TREATED ROOF FRAMING - COORDINATE WITH STRUCTURAL DRAWINGS
   6Z. LINE OF 8" CMU WALL FRAMING (SHOWN DASHED)
   6AA. WOOD TRELLIS - PAIR OF 2x12 WESTERN CEDAR WOOD BEAMS BOLTED TO CEDAR COLUMN WITH 2x12 WESTERN CEDAR WOOD CAPS & TIES AT 1'-2" O.C.
   6BB. 2x2 CEDAR WOOD TRELLIS DECORATIVE BEAMS 2" O.C. SECURE TO 2x6 CROSS TEES
   6CC. 2x4 WOOD STUDS @ 16" O.C. REFER TO STRUCTURAL
   6DD. 2x4 WOOD SILL PLATE W/ CONTINUOUS SILL GASKET (FIRST FLOOR ONLY), REFER TO STRUCTURAL
   6EE. DOUBLE 2x4 WOOD STUD TOP PLATE, REFER TO STRUCTURAL
   6FF. JOIST GIRDER - REFER TO STRUCTURAL
   6GG. 5/8" PLYWOOD CATWALK SHEATHING SECURED TO ROOF TRUSSES - PROVIDE CONTINUOUS WALKING SURFACE FROM ACCESS HATCH TO ROOFTOP EQUIPMENT (NO GAPS)
   6HH. ROOF WALKING PADS - COORDINATE WITH ROOFTOP EQUIPMENT
   6JJ. 6x8 ROUGH CUT CEDAR POSTS, REFER TO STRUCTURAL FOR ADDITIONAL INFORMATION
   6KK. 4.5" CEDAR TEG PANELS - REFER TO STYLE - EVEN BUTT
   6LL. 6x10 ROUGH CUT CEDAR RAFTER, REFER TO STRUCTURAL DRAWINGS
   6MM. 6x12 ROUGH CUT CEDAR RIDGE PURLIN, REFER TO STRUCTURAL DRAWINGS
7. THERMAL AND MOISTURE PROTECTION:
   7A. 2"x8" PRE-FINISHED METAL OVERHANG OUT, COLOR TO BE SELECTED BY ARCHITECT
   7B. 7" REG. PRE-PAINTED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT. - ROUTE TO STORM PIPING. SEE CIVIL DRAWINGS
   7C. R-30 UNFACED BATT INSULATION
   7D. FIBER CEMENT CORNICE, PAINTED COLOR TO BE SELECTED BY ARCHITECT) REFER TO WALL SECTIONS AND DETAILS FOR ASSEMBLY.
   7E. BATT INSULATION - REFER TO CONTRACK & RESCHECK FOR R VALUES
   7F. 5/16" THK. CEDAR FINISHED FIBER-CEMENT PANEL BOARD - COLOR TO BE SELECTED BY ARCHITECT.
   7G. HORIZONTAL EDGE METAL WALL PANELS WITH CORNER (INSIDE OUTSIDE AND BOTTOM AT EXPOSED BASE OF DESIGN WITH METAL SALES - PRODUCT TO INSTALL PER MFR'S RECOMMENDATIONS - COLOR TO BE SELECTED BY ARCHITECT
   7H. 4" NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   7I. 8" NOMINAL FIBER-CEMENT LAP SIDING BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   7K. CEDAR FINISHED FIBER-CEMENT BOARD AND BATTER BOARD @ 16" O.C. - COLOR TO BE SELECTED BY ARCHITECT.
   7L. 8" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   7M. 6" NOMINAL FIBER-CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   7N. FULLY ADHERED MEMBRANE ROOFING OVER 1" TAPERED POLYISOCYANURATE INSULATION OVER 5/8" EXTERIOR GRADE PLYWOOD SHEATHING W/ CLIPS, INSTALL PER MFR'S MOST RECENT RECOMMENDATIONS.
   7P. MEMBRANE ROOF FLASHING, EXTEND UP ON ROOF, UP AND OVER PARAPET WALL - INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
   7Q. ROOF CRICKET - FORM FROM RIGID BOARD, APPLY 1 PIECE MEMBRANE ROOFING TO MATCH ROOF
   7R. MEMBRANE FLASH AND COUNTER FLASH AT DECK EDGE, COUNTER FLASHING, EXTEND MEMBRANE UP WALL MIN 12"
   7S. PRE-FINISHED ALUMINUM COPING CAP SLOPE 1/8" PER FOOT TOWARDS ROOF, COLOR TO BE SELECTED BY ARCHITECT. SEE WALL DETAILS FOR PARAPET CORNICE FABRICATION
   7T. CONTINUOUS PRE-PAINTED DRIP EDGE FLASHING, EXTEND UNDER EXTERIOR FINISH MIN. 4"
   7U. CONTINUOUS ALUMINUM REGLET WITH FASTENERS AT 12" O.C.
   7V. SMOOTH FINISHED 5/8" THICK FIBER CEMENT PANELS, COLOR TO BE SELECTED BY ARCHITECT WITH THE FOLLOWING METAL EDGE TRIMS BY PATTERN SELECTION: SILL JOINTS OF VERTICAL OR VERTICAL ALTERNATE WIDTH VERTICAL JOINTS, HORIZONTAL JOINTS, DOUBLE HORIZONTAL JOINTS, INSIDE AND OUTSIDE CORNERS (TOP OUTSIDE CAP), FLASHING (WHERE INDICATED ON DWGS), WINDOWS, DOORS (PAINTED), CONTRACTOR SHALL USE FINISH COLOR CAP CAPS ABOVE OPENINGS, CONTRACTOR SHALL USE BASE TRIM FOR BASE AT FIRST FLOOR ELEVATION WHERE NOT BEING CONTINUED BY THE FIBER CEMENT PANEL SIDING, TRIM FINISH TO BE SELECTED BY ARCHITECT.
   7W. MEMBRANE FLASHING PUMP SNOW'S GASKETS - NOT USED ON EXTERIOR WALLS WHEN ZIP SHEATHING IS USED
   7X. ALUMINATED BATT INSULATION
   7Y. CONTINUOUS ROOF INSULATION
   7Z. 3.5/2" BATT INSULATION
   7AA. ASPHALT COMPOSITE SHINGLES OVER 5/8" ROOF FELT OVER 5/8" EXTERIOR GRADE ROOF SHEATHING W/ CLIPS - REFER TO STRUCTURAL DRAWINGS
   7BB. RC-240 LOUVER, LOUVER MODEL FY-VON MFR.
   7CC. METAL ROOF FLASHING, EXTEND UNDER SHINGLES AND UP WALL MIN. 8"
   7DD. RIDGE VENT
   7EE. FLASHED
   7FF. CONTINUOUS PRE-FINISHED ALUMINUM DRIP EDGE, INSTALL UNDER ASPHALT SHINGLES AND EXTEND BEYOND GCP MEMBRANE FLASHING MIN. 1/4"
   7GG. 7x4" PRE-FINISHED METAL GUTTER/SPOUT, COLOR TO BE SELECTED BY ARCHITECT
   7HH. 4" WIDE PRE-FINISHED RECTANGULAR METAL GUTTER, COLOR TO BE SELECTED BY ARCHITECT. - ROUTE TO STORM PIPING, SEE CIVIL DRAWINGS
   7JJ. METAL BOOKENDS
   7KK. CONTINUOUS INSULATION BAFFLE
   7LL. FASCIA TRIANGLE LOUVER
   7MM. SLANT BACK ROOF LOUVER ALUMINUM OF 54 SQ. IN OF FREE VENTILATION AREA PER UNIT) - COLOR TO BE SELECTED BY ARCHITECT. PROVIDE ONE SQ. FT. OF FREE VENTILATION PER EVERY 150 SQ. FT OF ATTIC FLOOR SPACE. (ELECTRONIC VENTILATION PER MFG. RECOMMENDATIONS.
   7NN. TRUCK CHUTE EXHAUST HOOD
   7PP. 10 NOMINAL FIBER CEMENT TRIM BOARDS - COLOR TO BE SELECTED BY ARCHITECT.
   7QQ. 1x4 FIBER CEMENT TRIM BOARD OVER 1x2 EXTERIOR GRADE WOOD BLOCKING. CONTINUOUS AT DRIP TAIL EDGE
   7RR. VENTED SOFFIT PANEL - PROVIDE BLOCKING AS NECESSARY
   7SS. FIBER CEMENT TRIM BOARDS - PROVIDE AS NECESSARY TO WRAP BEAM
   7TT. RECESSED AND PRE-FINISHED METAL GUTTER.
8. OPENINGS:
   8A. (###) WINDOW UNIT WITH INSULATED GLAZING, REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION, INSTALL PER MANUFACTURER'S INSTRUCTIONS
   8B. EXTERIOR INSULATED METAL DOOR AND FRAME ASSEMBLY, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION, INSTALL PER MANUFACTURER'S INSTRUCTIONS
   8C. EXTERIOR HINGED PATIO DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION.
   8J. ALUMINUM THRESHOLD, PROVIDE WHERE 2 BEARS OF CONT. EGRANT UNDER THRESHOLD
   8K. ALUMINUM STOREFRONT DOOR & WINDOW ASSEMBLY W/ THICK INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION
   8P. DELIVERY DOOR - 10'-0" x 8'-0" ALUMINUM
   8S. OVERHEAD COILING DOOR, REFER TO DOOR SCHEDULE FOR ADDITIONAL INFORMATION
   8V. 24" X 24" INSTALLED EXTERIOR ACCESS PANEL, PAINT TO MATCH SIDING COLOR
   8X. VINYL PICTURE WINDOW UNIT WITH INSULATED GLAZING AND INTERNAL CHANNEL FRAMES. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   8K. ALUMINUM WINDOW UNIT WITH INSULATED GLAZING. REFER TO WINDOW SCHEDULE FOR ADDITIONAL INFORMATION.
   8L. PULL-DOWN COMMERCIAL GRADE ALUMINUM FOLDING STAIRWAY
9. FINISHES:
   9A. FINISH FLOOR, REFER TO ROOF FINISH SCHEDULE FOR ADDITIONAL INFO.
   9B. 5/8" TYPE 'X' GYPSUM WALL BOARD
   9C. 5/8" TYPE 'X' GYPSUM BOARD OVER 1/2" RESILIENT CHANNELS @ 12" O.C. (PERIMETER WALLS ONLY FOR CEILING AND ALL 4 SIDES FOR ROOF)
   9D. 1/2" FIRE RATED GYPSUM WALLBOARD OVER 1/2" RESILIENT CHANNELS @ 24" O.C.
   9E. 1 LAYER 5/8" TYPE 'X' GYPSUM BOARD OVER 1/2" RESILIENT CHANNELS @ 12" O.C. OVER 5/8" TYPE 'X' GYPSUM BOARD (PER UL #577 FOR CEILING - 2HR ASSEMBLY)
12. SPECIALTIES:
   12A. MECHANICAL VENTILATION LOUVER, REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION
14. EQUIPMENT:
   14A. METAL WARDLIFT UNIT, REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION. INSTALL PER MFR. RECOMMENDATIONS.
   14B. ROOF ACCESS HATCH
14. CONVEYING SYSTEMS
   14A. ELEVATOR - REFER TO ELEVATOR MANUFACTURER'S DRAWINGS
15. PLUMBING
   15A. DRINKING FOUNTAIN: REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION. PROVIDE HEA-OVA ADA COMPLIANT UNIT

ARCHITECT
Studio A, LLC
2330 FRANKFORT AVE
LOUISVILLE, KENTUCKY 40206
T:502.589.8007 : F:502.589.8004
WWW.STUDIOAARCH.COM

NOTE:

DOOR PLACEMENT:
UNLESS OTHERWISE DIMENSIONED ON PLANS, INSTALL DOORS PER THE FOLLOWING FINISH DIMENSIONS LISTED BELOW (FACE OF DYE TO FACE OF DYE):



NOTE:

1. DIMENSIONS ON PLANS ARE FROM FACE OF STUD FRAMING TO FACE OF STUD.
2. FRAMING/WINDOW & EXTERIOR DOOR LOCATIONS ARE SHOWN FOR REFERENCE ONLY. FOR EXACT WINDOW & DOOR LOCATIONS PLEASE REFER TO FLOOR DIMENSION PLANS.

KEY PLAN

NO.	REVISION/SUBMISSIONS	DATE

SEAL

RECEIVED
SEP 26 2019
PLANNING & DESIGN SERVICES

DESIGN ARCHITECT
RICKHAUS DESIGN
1469 South 4th Street Suite 310
Louisville, KY 40208
T: (502) 638-0534

OWNER
NEW CUT RD., LP
1469 S. 4TH STREET
LOUISVILLE, KY 40202
P: 502-638-0534

PROJECT TITLE
NEW CUT RD.
LOUISVILLE, KY

REVIEW SET

ARCHITECTURAL	DATE 07/03/2019

SHEET TITLE
GARAGE

PROJECT NO.	SHEET NO.
19LD00-07	A141

19-WAIVER-00059