


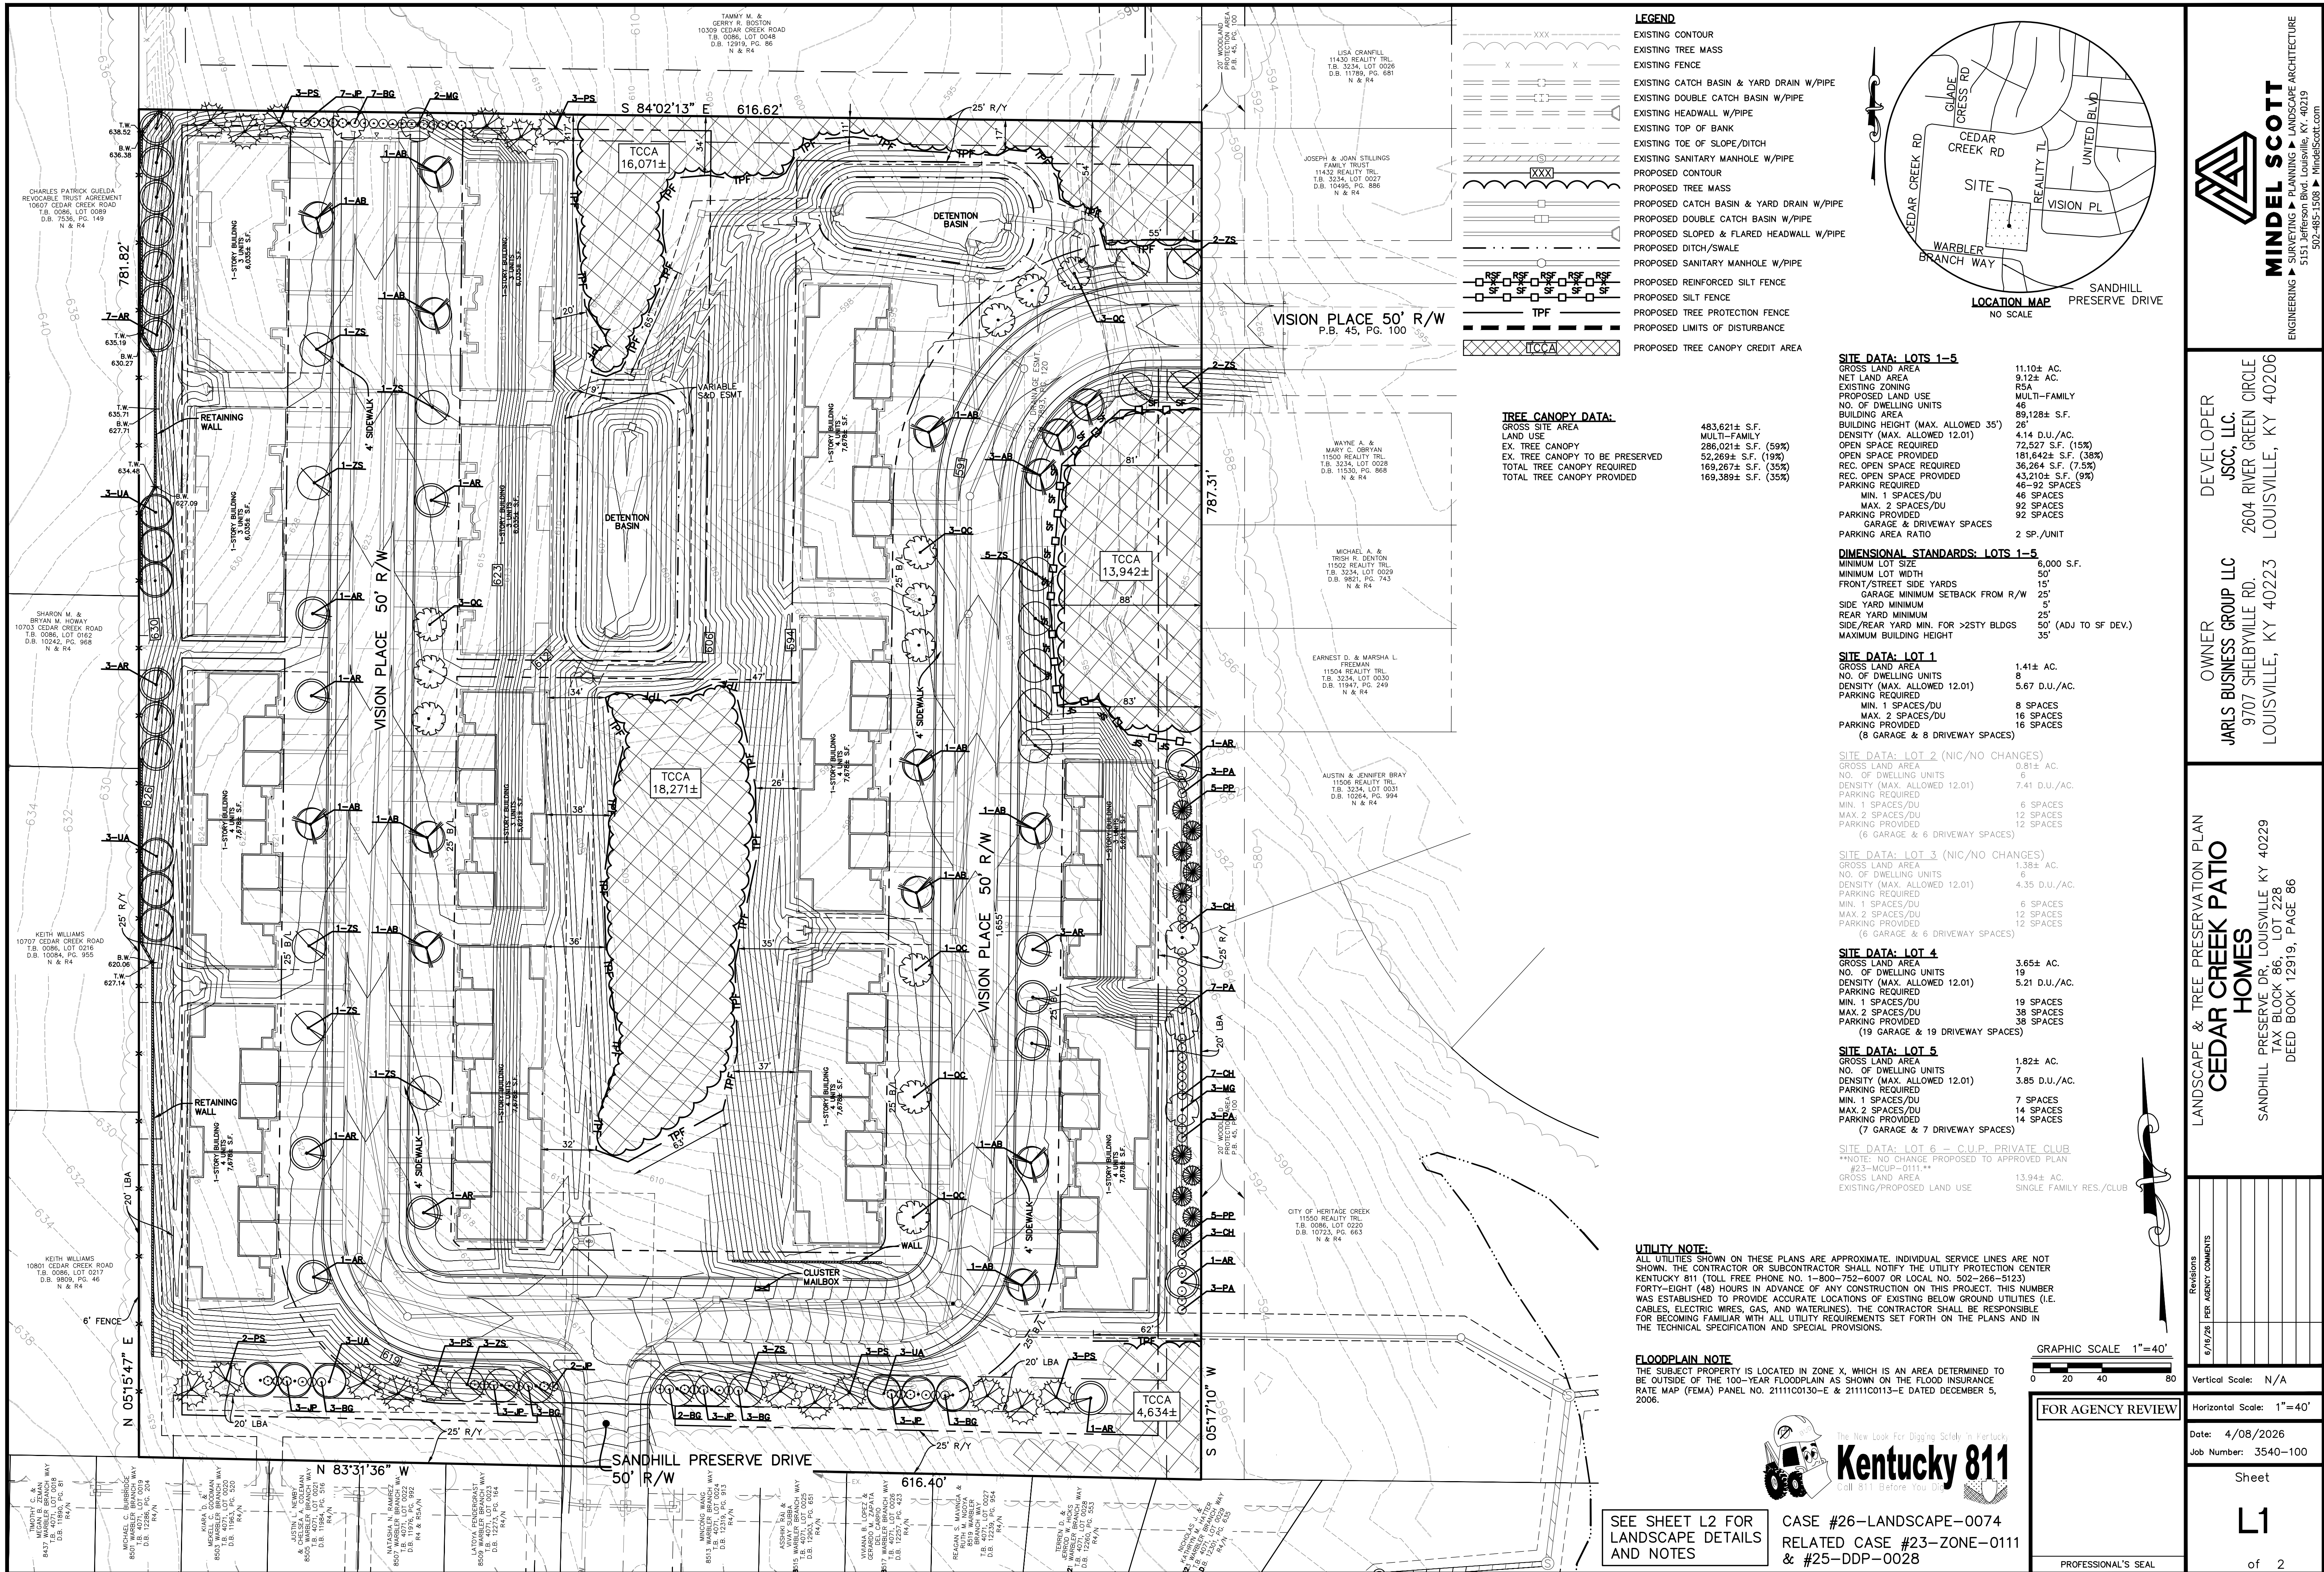

1. THE CALIPER OF ALL DECIDUOUS TREES SHALL BE MEASURED SIX (6) INCHES ABOVE GROUND LEVEL.
2. ALL PLANT MATERIAL TO BE BALLED & BURLAP UNLESS PRIOR APPROVAL IS OBTAINED FROM THE LANDSCAPE ARCHITECT OR OWNER.
3. ALL DISTURBED AREAS SHALL BE SEEDED OR SODDED AS INDICATED ON PLAN.
4. DITCHES AND SWALES SHALL BE SEEDED AND/OR SODDED WHERE PAVING IS NOT REQUIRED.
5. SEEDING/SODDING SHALL BE PERMITTED WITHIN THE TIME PERIODS STIPULATED IN CHAPTER 10, OF THE LOUISVILLE METRO GOVERNMENT CODE, UNLESS CODE REQUIREMENT IS GIVEN BY THE LANDSCAPE ARCHITECT OR OWNER.
6. SEEDING AND SODDING SHALL NOT BE INSTALLED IN AREAS OF WATER, GAS, TELEPHONE AND ELECTRIC INSTALLATION UNTIL AFTER THESE UNDERGROUND UTILITIES ARE INSTALLED, UNLESS OTHERWISE DIRECTED BY THE LANDSCAPE ARCHITECT OR OWNER.
7. THE CONTRACTOR SHALL REPAIR SITE EROSION AFTER TURF HAS BEEN ESTABLISHED AND ACCEPTED BY THE LANDSCAPE ARCHITECT OR OWNER IN ACCORDANCE WITH KENTUCKY HIGHWAY SPECIFICATIONS SECTION 212.06.05.
8. ALL PLANTS MUST BE HEALTHY, FREE OF PESTS AND DISEASES. PLANT SIZES INDICATED IN PLANT LIST ARE INSTALLED SIZES.
9. STANDARDS SET FORTH IN AMERICAN STANDARDS FOR NURSERY STOCK REPRESENT GUIDELINE SPECIFICATIONS ONLY AND CONSTITUTE MINIMUM QUALITY REQUIREMENTS FOR ALL PLANT MATERIAL.
10. THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE YEAR, OR THOUGH THE CONTRACTOR MAY BE UNABLE TO LOCATE THE PLANT, THE OWNER OF THE LANDSCAPE CONTRACTOR SHALL PROMPTLY MAKE ALL REPLACEMENTS BEFORE OR AT THE END OF THE GUARANTEE PERIOD (AS PER DIRECTION OF THE OWNER).
11. THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING ALL PLANTINGS INSTALLED UNDER THIS CONTRACT (INCLUDING BUT NOT LIMITED TO: HERBICIDES, SPRAYING, MOWINGS, FERTILIZING, ETC.) OF PLANTING AREAS AND LAWNS UNTIL THE WORK AREAS ARE ACCEPTED IN TOTAL BY THE OWNER.
12. THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING ANY DAMAGE TO UTILITIES, STRUCTURES, SITE APPEARANCES, ETC. WHICH OCCUR AS A RESULT OF LANDSCAPE INSTALLATION.
13. ALL LANDSCAPE ISLANDS SHALL BE SEEDED, SODDED, OR PLANTED WITH DROUGHT TOLERANT GROUNDCOVER OR SHRUBS, AS SPECIFIED BY THE OWNER.
14. A MINIMUM OF TWO (2) INCHES OF SHREDDED BARK MULCH SHALL BE SPREAD AROUND ALL SHRUB BEDS. ALL LANDSCAPE ISLANDS IN THE VEHICLE USE AREA SHALL BE SEEDED OR PLANTED WITH GROUNDCOVER AT OWNER'S DISCRETION. IRRIGATION SHALL BE PLANTED BY OTHERS.
15. ONLY AMENDED TOPSOIL, FREE FROM LARGE STONE CLAY AND ROOTS WILL BE USED AS BACKFILL FOR ALL LANDSCAPE PLANTINGS.
16. PLANT SUBSTITUTIONS SHALL BE APPROVED BY LANDSCAPE ARCHITECT.
17. REMOVE ALL BURLAP, WIRE BASKETS, PLASTIC CONTAINERS, ROPE, TWINE AND OTHER NON-BIODEGRADABLE MATERIALS FROM THE ROOT BALL AFTER THE PLANT IS PLUMB AND CENTERED IN THE HOLE.
18. SEE LDC 10.4.4 FOR PLANT SPACING DISTANCE ADJACENT TO UTILITIES AND STRUCTURES.
19. GRASS GROUNDCOVER SHALL BE PLANTED ON ALL PORTIONS OF THE LANDSCAPE BUFFER AREA (LBA) NOT OCCUPIED BY OTHER LANDSCAPE MATERIAL.
20. THE GROUND PLANT OF ALL INTERIOR LANDSCAPE AREAS (I.L.A.) SHALL BE PLANTED USING EITHER SHRUBS, GROUNDCOVER OR TURF.
21. EXISTING TREES AND PLANT MATERIAL ARE BEING USED TO MEET LANDSCAPE CODE REQUIREMENTS. IF ANY TREES OR SCREENING VEGETATION DIE OR ARE REMOVED, THEY WILL BE REPLACED AS PER THE LANDSCAPE CODE REQUIREMENTS.
22. IT WILL BE THE RESPONSIBILITY OF THE PROPERTY OWNER TO PERPETUALLY MAINTAIN ALL LANDSCAPE AREAS AND ASSOCIATED PLANTING. THE LANDSCAPE ARCHITECT'S DESIGN AND CODE REQUIREMENTS. THE PROPERTY OWNER SHALL ALSO BE RESPONSIBLE FOR MAINTAINING THE VERGE AND ASSOCIATED TREES WITHIN THE VERGE UNLESS THE AGENCY HAVING JURISDICTION OVER THAT VERGE ASSUMES THAT RESPONSIBILITY.
23. ALL UNWEATHERED OR DEAD PLANT MATERIAL SHALL BE REPLACED WITHIN ONE (1) YEAR, OR BY THE NEXT PLANTING PERIOD, WHICHEVER COMES FIRST, WHILE OTHER DEFECTIVE PLANT MATERIAL SHALL BE REPLACED OR REPAIRED WITHIN THREE (3) MONTHS.
24. ALL PLANT MATERIAL LOCATED WITHIN A UTILITY EASEMENT THAT IS DAMAGED OR REMOVED DUE TO WORK REQUIRED BY THE UTILITY COMPANY SHALL BE IMMEDIATELY REPLACED BY THE OWNER IN ACCORDANCE WITH LAND DEVELOPMENT CODE REQUIREMENTS.
25. STREET TREES SHALL BE PLANTED IN A MANNER THAT DOES NOT AFFECT PUBLIC SAFETY AND MAINTAINS PROPER RIGHT OF WAY.
26. A SERVICE STRUCTURES SHALL BE SCREENED IN ACCORDANCE WITH LAND DEVELOPMENT CODE CHAPTER 10, SECTION 10.2.6 AND 10.4.9. SERVICE STRUCTURES INCLUDE BUT ARE NOT LIMITED TO: PROPANE TANKS, DUMPSTERS, HVAC UNITS, ELECTRIC TRANSFORMERS, TELECOM BOXES, ETC.
27. LIGHT POLES, SIDEWALKS, BENCHES, ETC. SHALL NOT OCCUPY MORE THAN TWENTY-FIVE (25%) PERCENT OF ANY INTERIOR LANDSCAPE AREA (I.L.A.) OR REDUCE THE WIDTH OF ANY PLANTED AREA TO LESS THAN FOUR (4) FEET. CONTRACTOR SHALL PROVIDE SUFFICIENT LIGHT FOR LANDSCAPE PLANT PROPOSED TREE PLANTING TO AVOID CONFLICT.
28. IRRIGATION WILL BE PROVIDED AS REQUIRED WHERE BERMS OR EARTHEN MOUNDS ARE PROPOSED. THIS IRRIGATION SYSTEM SHALL BE DESIGNED TO PROVIDE ADEQUATE WATERING OF THE PROPOSED PLANT MATERIAL AND LAWN AREAS. THE SYSTEM SHALL CONSIST OF SLOW FLOW, CENTRAL TRUNK WITH A CENTRAL TRUNK WITH OTHER FUR-UP AND ROTATING IRRIGATION HEADS OR A DRIP LINE SYSTEM. THE PROPOSED SYSTEM SHALL BE INSTALLED PRIOR TO PLANTING.
29. PARKWAY, SCENIC CORRIDOR, AND GENE SNYDER FREEWAY PLANTING MUST BE INSTALLED WITHIN SIX (6) MONTHS OR NEXT AVAILABLE PLANTING SEASON PER PDS STAFF, FROM THE ISSUANCE OF THE SITE DISTURBANCE/CLEARING AND GRADING PERMIT.
30. AN AUTHORIZED INSPECTOR SHALL HAVE THE RIGHT TO ENTER ONTO ANY PROPERTY TO INSPECT THE HEALTH AND GENERAL CONDITION OF PLANT MATERIAL THAT IS: LOCATED IN THE RIGHT OF WAY; PART OF AN APPROVED DEVELOPMENT/LANDSCAPE PLAN; OR REPORTED AS A PUBLIC HAZARD.
31. THE LANDSCAPE CONTRACTOR, IN THE PROPERTY OWNER'S PRESENCE, A LICENSED LANDSCAPE ARCHITECT SHALL INSPECT AND CERTIFY THAT ALL REQUIRED LANDSCAPING, INCLUDING SCREEN FENCING HAS BEEN INSTALLED OR PLANTED AS SHOWN ON THE APPROVED LANDSCAPE PLAN.
32. PLANTING PLANNINGS MUST BE INSTALLED PRIOR TO OCCUPANCY OF THE SITE OR AT THE NEXT AVAILABLE PLANTING SEASON. THESE PLANTINGS ARE TO BE MAINTAINED THEREAFTER.
33. SEED ALL DISTURBED AREAS AS NOTED BELOW.

1. CONSTRUCTION FENCING SHALL BE ERECTED WHEN OFF-SITE TREES OR TREE CANOPY EXISTS WITHIN THREE (3) FEET OF A CONSTRUCTION FENCING LINE. FENCING SHALL BE PLACED TO PROTECT ALL EXISTING TREES AND TO PROTECT THE EXISTING ROOT SYSTEMS FROM COMPRESSION. FENCING SHALL ENCLOSE THE ENTIRE AREA BENEATH THE TREE CANOPY THAT SHALL REMAIN IN PLACE UNTIL ALL CONSTRUCTION IS COMPLETED. NO PARKING, MATERIAL STORAGE OR CONSTRUCTION ACTIVITIES ARE PERMITTED WITHIN THE PROTECTED AREA.
2. PRE-CONSTRUCTION OR CONSTRUCTION ACTIVITIES A SITE INSPECTION BY PDS STAFF OR DESIGNEE SHALL BE SCHEDULED TO CONFIRM AND VERIFY THE TREE PRESERVATION/PROTECTION FENCING AND SIGNAGE IS INSTALLED AND CORRECTLY PLACED. TO SCHEDULE AN INSPECTION APPOINTMENT CALL PDS CUSTOMER SERVICE 502-574-6230.
3. SIGNAGE SHALL BE PLACED TO IDENTIFY THE TREE PRESERVATION/PROTECTION FENCING AND TO IDENTIFY THE ENCLOSED AREA AS TREE PRESERVATION/PROTECTION AREA. THE SIGNS SHALL INCLUDE THE FOLLOWING TEXT: "STAY OUT TREE PRESERVATION/PROTECTION AREA. NO EQUIPMENT, MATERIALS OR VEHICLES SHALL BE STORED OR PLACED WITHIN THE AREA ENCLOSED BY THIS TREE PRESERVATION/PROTECTION FENCE. THIS FENCE MAY NOT BE REMOVED WITHOUT THE WRITTEN APPROVAL OF THE CITY OF SEASIDE/CHANDLER COMMISSION. FAILURE TO COMPLY WILL RESULT IN FINES AND TREE MITIGATION. REPORT NON-COMPLIANCE TO 502-574-6230."
4. THE TREE PRESERVATION/PROTECTION AREA SIGNAGE SHALL BE POSTED EVERY FIFTY (50) FEET ALONG THE TREE PRESERVATION FENCE. THE SIGNS SHALL BE A MINIMUM SIZE OF 8" X 10" AND WEATHER RESISTANT. IF THE SIGNS ARE DAMAGED OR MISSING, THE SIGNAGE SHALL BE REPLACED IMMEDIATELY.
5. DURING ALL CONSTRUCTION ACTIVITY (INCLUDING CLEARING, GRADING, BUILDING CONSTRUCTION, AND V.U.A. CONSTRUCTION) A COPY OF THE APPROVED TREE PRESERVATION PLAN SHALL BE ON-SITE.
6. AN AUTHORIZED INSPECTOR SHALL HAVE THE RIGHT TO ENTER onto ANY PROPERTY TO INSPECT THE HEALTH AND GENERAL CONDITION OF PLANT MATERIAL THAT IS LOCATED IN THE RIGHT OF WAY; PART OF AN APPROVED DEVELOPMENT/LANDSCAPE PLAN; OR REPORTED AS A PUBLIC HAZARD.

1. TEMPORARY TREE PROTECTION AREA (TTPA'S) IDENTIFIED ON THIS PLAN REPRESENT PORTIONS OF THE SITE THE DEVELOPER HAS IDENTIFIED AND SET ASIDE DURING THE DEVELOPMENT OF ROADWAYS, UTILITIES AND SIGNAGE AND INFRASTRUCTURE. THESE ARE NOT PERMANENT PRESERVATION AREAS. TREES IN THESE AREAS MAY BE REMOVED DURING THE CONSTRUCTION OF HOMES OR BUILDINGS ON THIS SITE.
2. TREE PROTECTION FENCING SHALL BE ERECTED ADJACENT TO ALL TTPA'S PRIOR TO SITE DISTURBANCE APPROVAL (CLEARING AND GRADING PERMIT) TO PROTECT THE EXISTING TREE STANDS AND THEIR ROOT SYSTEMS. THE FENCING SHALL BE LOCATED AT LEAST THREE (3) FEET FROM THE OUTSIDE EDGE OF THE TREE CANOPY AND SHALL REMAIN IN PLACE UNTIL ALL CONSTRUCTION IS COMPLETE. WHEN CONSTRUCTION MUST BE RELOCATED WITHIN A TTPA, THE FENCE SHALL BE RELOCATED TO PROTECT ALL REMAINING TREES WITHIN THAT TTPA. WHEN A TREE MASS CONTAINS WPA'S, TTCA'S, OR TTPA'S FENCING SHALL ONLY BE REQUIRED AT THE OUTER MOST PERIMETER OF THAT TREE MASS.
3. DIMENSION LINES HAVE BEEN USED ON THIS PLAN TO ESTABLISH THE GENERAL LOCATION OF TTPA'S AND REPRESENT MINIMUM DISTANCES. THE FINAL BOUNDARY FOR EACH TTPA SHALL BE ESTABLISHED IN THE FIELD TO INCLUDE CANOPY AREAS OF ALL TREES WITHIN THE DIMENSION LINE.
4. WHERE, DUE TO THE NATURE OF CONSTRUCTION PLANS, THE TREE PROTECTION FENCING IS NOT LOCATED THREE (3) FEET FROM THE OUTSIDE EDGE OF TREE CANOPY, THE TREE SHALL NOT BE CONSIDERED PRESERVED. HOWEVER, THIS DOES NOT PROHIBIT EFFORTS TO SAVE THE TREE.
5. NO PAVING, MATERIAL STORAGE OR CONSTRUCTION ACTIVITIES ARE PERMITTED WITHIN TTPA'S BEYOND THAT ALLOWED FOR PRELIMINARY SITE INVESTIGATION WORK.
6. CLEARING, NECESSARY TO PROVIDE ACCESS FOR SURVEY WORK, ROCK SOUNDINGS OR OTHER USUAL AND CUSTOMARY SITE INVESTIGATIONS SHALL BE PERMITTED PRIOR TO SITE DISTURBANCE APPROVAL. PRELIMINARY SITE INVESTIGATIONS SHALL BE CAREFULLY PLANNED TO MINIMIZE THE AMOUNT OF CLEARING REQUIRED. CLEARING SHOULD FOLLOW PROPOSED ROADWAY AND ACCESSWAYS AND BE LIMITED TO THE MINIMUM NECESSARY TO PROVIDE ACCESS TO THE FIELD. THE AMOUNT OF FIELD ACCESS WAYS BEYOND PROPOSED ROADWAYS TO ASSESS INDIVIDUAL LOTS SHALL NOT EXCEED TWELVE (12) FEET IN WIDTH OR ENOUGH INTO ANY PROPOSED OPEN SPACE LOTS. NO TREES EXCEEDING EIGHT (8) INCHES IN DIAMETER MEASURED AT BREAST HEIGHT (DBH) SHALL BE REMOVED WITHOUT PRIOR APPROVAL BY PLANNING & DESIGN SERVICES STAFF.

1. TREE CANOPY CREDIT AREAS (TCCA) ARE THOSE AREAS WHERE TREE PRESERVATION HAS BEEN PROVIDED TO MEET THE TREE CANOPY REQUIREMENTS OF THIS PART.
2. LOCATIONS OF TCCAS SHALL BE IN ACCORDANCE WITH THE TREE CANOPY PRESERVATION PLAN. THE LOCATION OF THE TCCA BOUNDARY DELINEATES THE LIMIT OF DISTURBANCE ASSOCIATED WITH THE TCCA. THE LIMIT OF DISTURBANCE SHALL INDICATE THE LOCATION OF THE TREE PROTECTION FENCING.
3. GRADING, STRUCTURE CONSTRUCTION AND LAND DISTURBING ACTIVITY SHALL TAKE PLACE WITHIN THE TCCA BEYOND PRUNING TO IMPROVE THE GENERAL HEALTH OF THE TREE OR TO REMOVE DEAD OR DECLINING TREES THAT MAY POSE A PUBLIC HEALTH AND SAFETY THREAT. AS TREES ARE LOST THROUGH NATURAL CAUSES, NEW TREES SHALL BE PLANTED IN THE TCCA TO MAINTAIN A MINIMUM TREE CANOPY AS SPECIFIED IN THIS PART. UNDERBRUSH AND INVASIVES ARE PERMITTED TO BE REMOVED IN THE TCCA.
4. NO STRUCTURE (EXCEPTION: FENCES, WALLS, RETAINING WALLS) SHALL BE CLOSER THAN 15 FEET TO THE LIMIT OF DISTURBANCE (TREE PROTECTION FENCE).
5. DURING A CONSTRUCTION ACTIVITY (INCLUDES CLEARING, GRADING, BUILDING CONSTRUCTION AND VUA CONSTRUCTION) A COPY OF THE APPROVED TREE CANOPY PRESERVATION PLAN SHALL BE ON-SITE.

1. CONTRACTOR SHALL CONDUCT A SITE VISIT BEFORE BIDDING.
2. CONTRACTOR IS RESPONSIBLE FOR CLEARING ALL TREES, UNDERSTORY BRUSH, AND VINES NOT SHOWN TO BE PRESERVED ON THE TREE PRESERVATION PLAN.

| KEY                                                                                                           | QTY. | BOTANICAL NAME                 | COMMON NAME               | SIZE / SPACING         | NOTES / TYPE | TREE CANOPY CREDIT | TOTAL        |
|---------------------------------------------------------------------------------------------------------------|------|--------------------------------|---------------------------|------------------------|--------------|--------------------|--------------|
| <b>DECIDUOUS TREE</b>                                                                                         |      |                                |                           |                        |              |                    |              |
| AR                                                                                                            | 21   | ACER RUBRUM                    | RED MAPLE                 | 1-3/4" CAL. / AS SHOWN | B&B / A      | 1,200 S.F.         | 25,200 S.F.  |
| ZS                                                                                                            | 21   | ZELKOVA SERRATA                | JAPANESE ZELKOVA          | 1-3/4" CAL. / AS SHOWN | B&B / A      | 1,200 S.F.         | 25,200 S.F.  |
| QC                                                                                                            | 11   | QUERCUS 'CHRIMSCHMIDT'         | CRIMSON SPIRE OAK         | 1-3/4" CAL. / AS SHOWN | B&B / B      | 720 S.F.           | 7,920 S.F.   |
| MG                                                                                                            | 5    | METASEQUIA GLYPTOSTROBIOIDES   | DAWN REDWOOD              | 1-3/4" CAL. / AS SHOWN | B&B / A      | 1,200 S.F.         | 6,000 S.F.   |
| UA                                                                                                            | 12   | ULMUS AMERICANA "VALLEY FORGE" | VALLEY FORGE AMERICAN ELM | 1-3/4" CAL. / AS SHOWN | B&B / A      | 1,200 S.F.         | 14,400 S.F.  |
| AB                                                                                                            | 15   | ACER BUERGERANUM               | TRIDENT MAPLE             | 1-3/4" CAL. / AS SHOWN | B&B / B      | 720 S.F.           | 10,800 S.F.  |
| <b>EVERGREEN TREE</b>                                                                                         |      |                                |                           |                        |              |                    |              |
| PS                                                                                                            | 17   | PINUS STROBUS                  | WHITE PINE                | 1-3/4" CAL. / AS SHOWN | B&B / A      | 1,200 S.F.         | 20,400 S.F.  |
| PP                                                                                                            | 10   | PICEA PUNGENS                  | NORWAY SPRUCE             | 1-3/4" CAL. / AS SHOWN | B&B / B      | 720 S.F.           | 7,200 S.F.   |
| <b>SHRUB</b>                                                                                                  |      |                                |                           |                        |              |                    |              |
| JP                                                                                                            | 24   | JUNIPERUS x PFITERIANA         | SEA GREEN JUNIPER         | 24" HT. / AS SHOWN     | #3 CONT.     |                    |              |
| BG                                                                                                            | 21   | BUXUS 'GREEN GEM'              | GREEN GEM BOXWOOD         | 24" HT. / AS SHOWN     | #3 CONT.     |                    |              |
| PA                                                                                                            | 16   | PICEA ABIES 'NIDIFORMIS'       | BIRDS NEST SPRUCE         | 24" HT. / AS SHOWN     | #3 CONT.     |                    |              |
| CH                                                                                                            | 13   | CEPHALOTAXUS HARRINGTONIA      | PLUM YEW                  | 24" HT. / AS SHOWN     | #3 CONT.     |                    |              |
| NOTE: BIDDER IS RESPONSIBLE FOR VERIFYING PLANT COUNT BY TAKING QUANTITIES FROM PLAN AND NOT FROM PLANT LIST. |      |                                |                           |                        |              | TOTAL              | 117,120 S.F. |

3 ft (1 m) CONSOLIDATION ZONE

COMPACTION ZONE

(TO BACK OF CUT AS NEEDED)

BACKSLOPE ANGLE,  $i$

FINISHED GRADE

BACKSLOPE HEIGHT

ALLAN BLOCK WALL BATTER FROM VERTICAL

$\beta$

OPTIONAL ALLAN BLOCK CAPSTONE

IMPERMEABLE FILL TO MINIMUM THICKNESS OF 6 in (150 mm)

12 in (300 mm)

ALLAN BLOCK UNIT

EXTENDED LENGTH MAY BE REQUIRED DUE TO SITE CONDITIONS OR LIMITED DUE TO PROPERTY LIMITS.

INFIILL SOIL

RETAINED SOIL

WELL-GRADED GRANULAR WALL ROCK 0.25 in TO 1.5 in (5 mm TO 38 mm) LESS THAN 10% FINES

GEOGRID REINFORCEMENT TYPE AND LENGTH VARIES PER WALL DESIGN

FINISHED GRADE

GEOGRID LENGTH

4 in (100 mm) TOE DRAIN PIPE VENTED TO DAYLIGHT

4 in (100 mm) HEEL DRAIN PIPE VENTED TO DAYLIGHT

EMBEDMENT DEPTH

6 in (150 mm) (MIN)

12 in (300 mm) (MIN)

**ALLAN BLOCK UNIT WALL DETAIL**

NO SCALE

Diagram illustrating the typical shrub planting process:

- SHRUB SHALL BE SET TO SUCH A DEPTH THAT THE FINISHED GRADE LEVEL OF THE PLANT AFTER SETTLING IS APPROX. THE SAME AS THAT WHICH THE PLANT WAS GROWING
- 2" (MIN.) BARK MULCH
- SOIL MIXTURE BACKFILL
- 4" EARTH RIM
- 6" (MIN.)
- REMOVE WIRE BASKET, PLASTIC CONTAINERS, ROPE, TWINE, ETC. FROM THE ROOT BALLS DURING THE PLANTING PROCESS.
- 6" COMPACTED SOIL (MIN.)
- SCARIFY BOTTOM AND SIDES OF HOLE TO 4" DEPTH MIN.

**TYPICAL SHRUB PLANTING**

NO SCALE

**FLAT-BOTTOM TRENCH**

**TYPE "C" TREE PROTECTION/SILT FENCE**

NO SCALE



The New Look For Digging Safety in Kentucky

# Kentucky 811

Call 811 Before You Dig

FOR AGENCY REQUEST

|                                                             |                   |
|-------------------------------------------------------------|-------------------|
| #23-EXHIBIT-0074<br>SATED CASE #23-ZONE-0111<br>25-DDP-0028 | PROFESSIONAL'S SE |
|-------------------------------------------------------------|-------------------|

PROFESSIONAL'S SE