


M:\3475\Crown Packaging\DWG\PLANNING\3475-RDDP.dwg, 1/16/2018 1:33:39 PM, \SERVER1\Canon IP7760

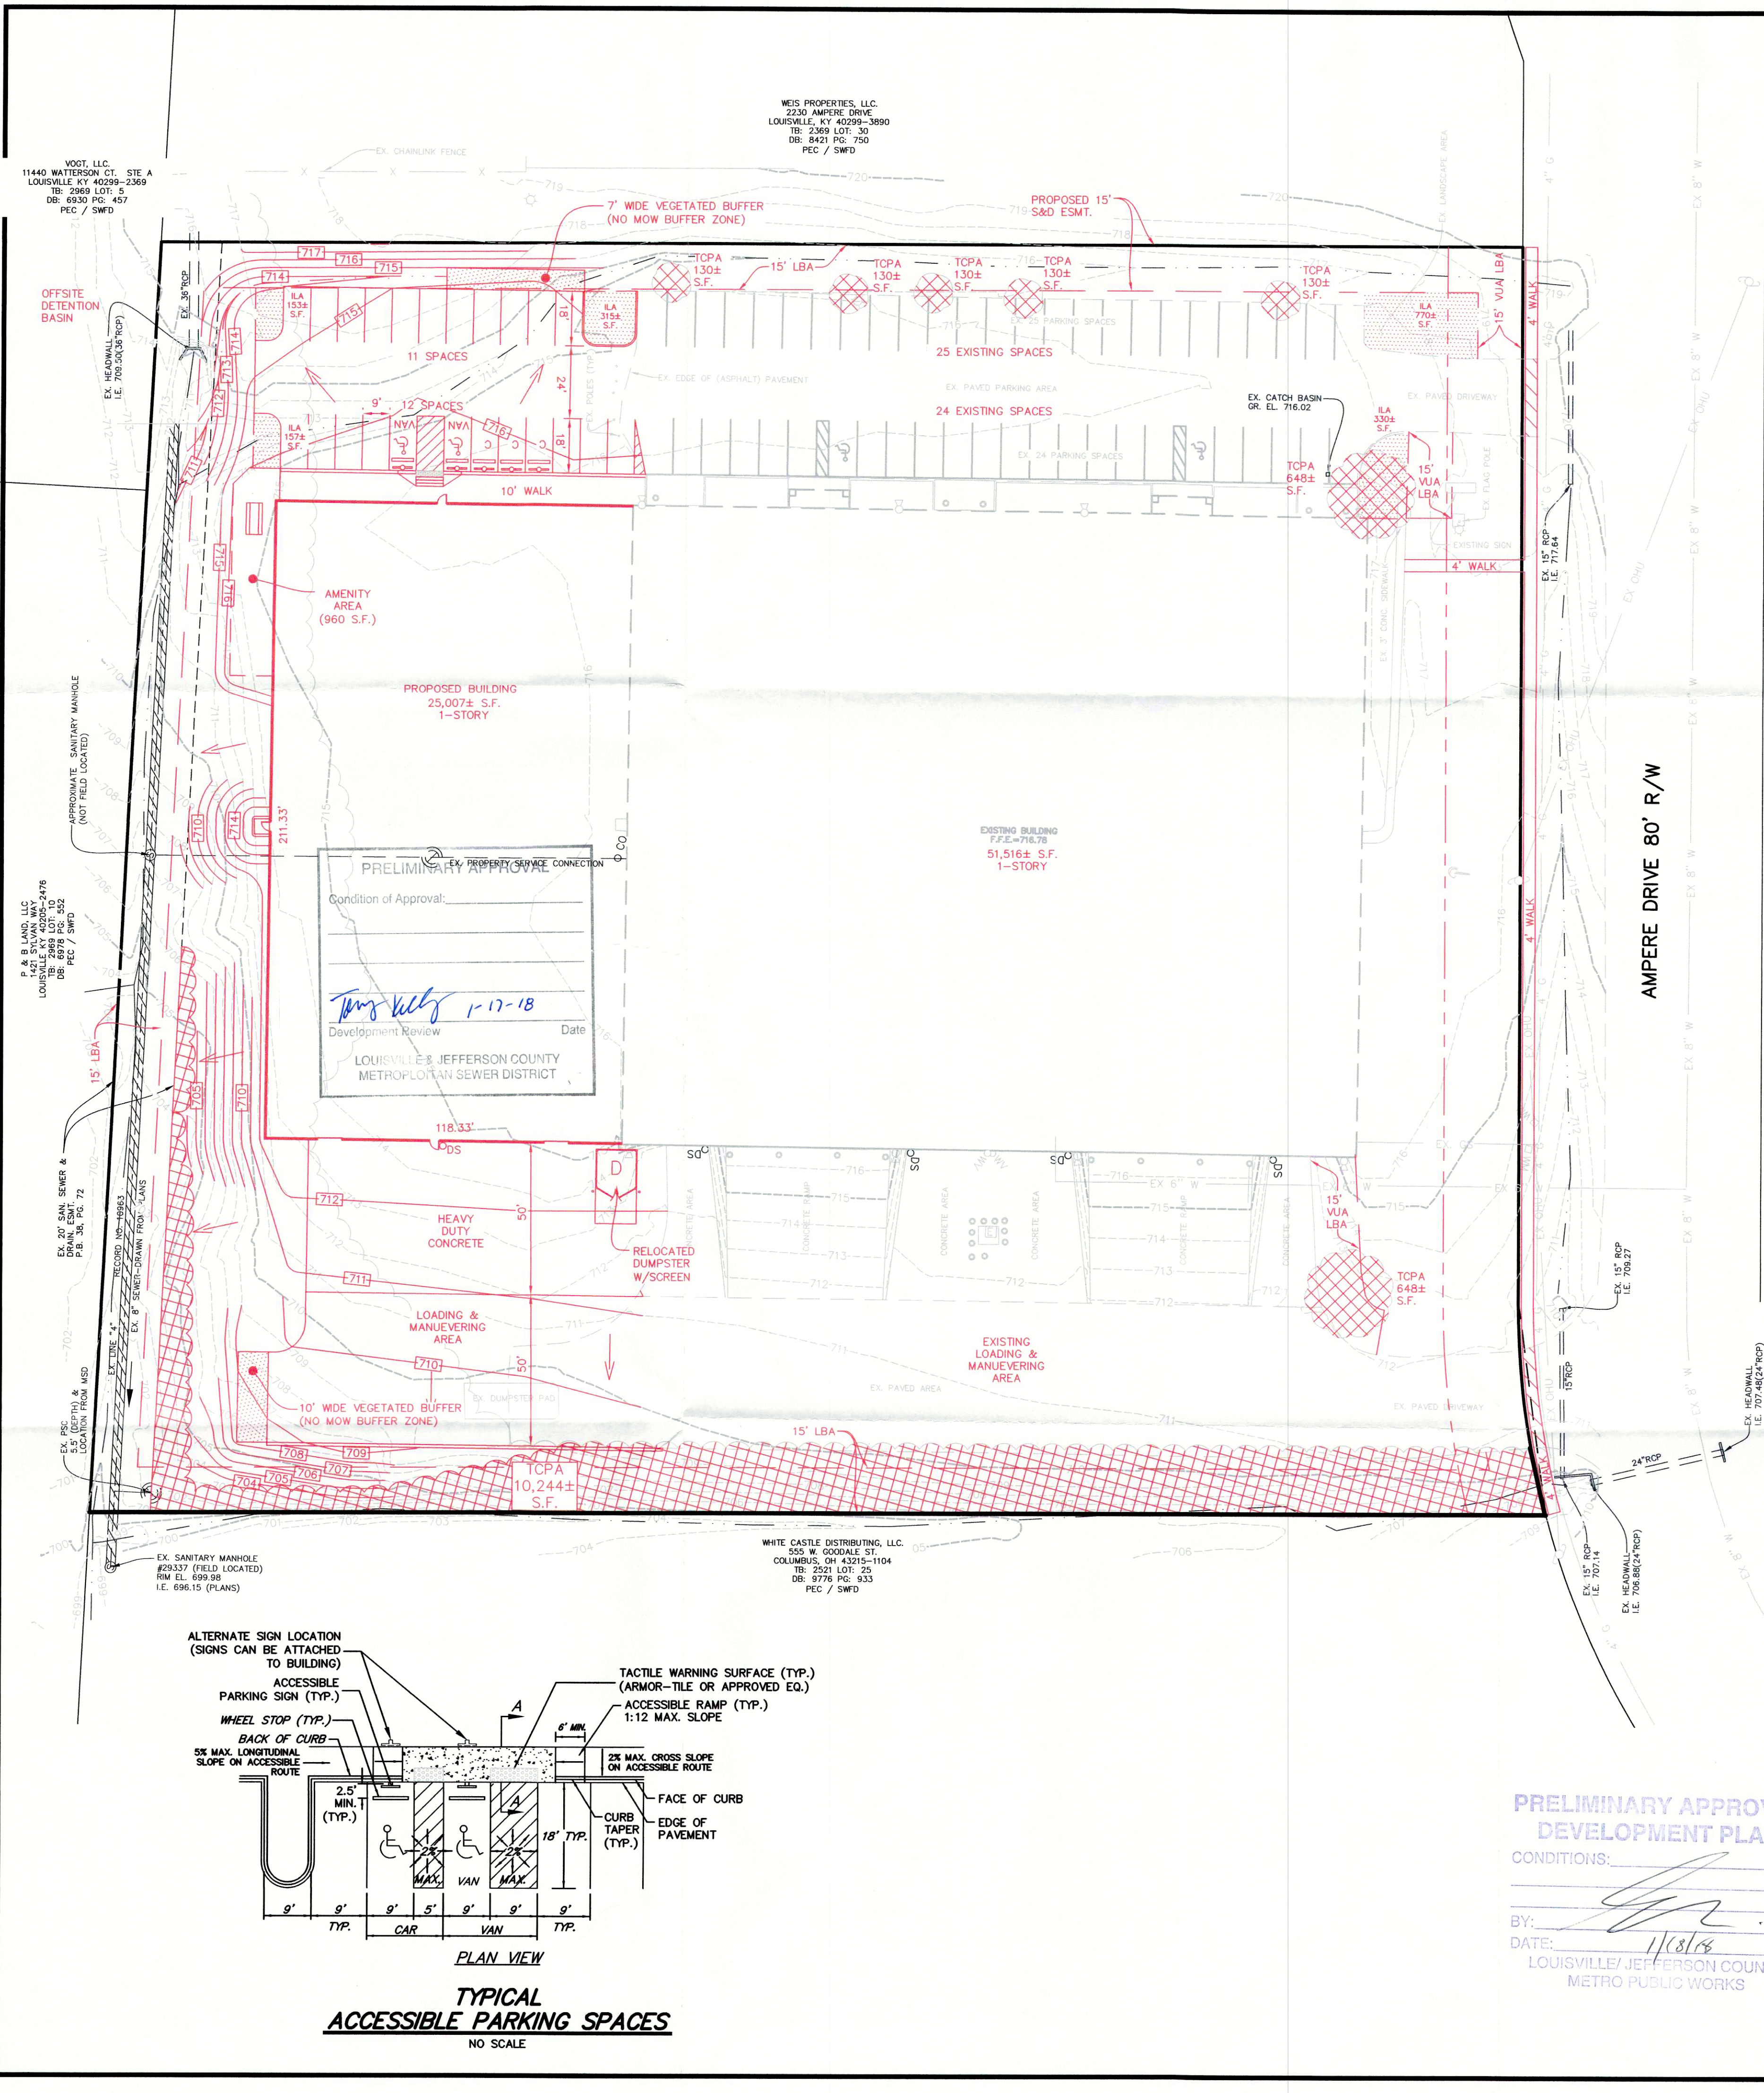

CHRISTOPHER R. & AMY M. CONNER  
1000 WALKER AVE. SUITE 200  
LOUISVILLE, KY 40202-2600  
TEL: 502.274.1000  
FAX: 502.274.1001  
PEC / SWFD

**SITE DATA:**

|                                                |                        |
|------------------------------------------------|------------------------|
| EXISTING FORM DISTRICT                         | SWFD                   |
| EXISTING ZONING                                | PEC                    |
| EXISTING LAND USE                              | MANUFACTURING          |
| PROPOSED LAND USE                              | MANUFACTURING          |
| TOTAL LAND AREA                                | 4.52± AC./196,891 S.F. |
| BUILDING AREA                                  |                        |
| EXISTING (INCLUDES 9,600 S.F. OFFICE)          | 51,516 ± S.F.          |
| PROPOSED                                       | 25,007 ± S.F.          |
| TOTAL                                          | 76,523 ± S.F.          |
| FLOOR AREA RATIO (MAX. ALLOWED 1.0)            | 0.39±                  |
| AMENITY AREA (10% OF OFFICE AREA)              | 960 S.F.               |
| PERCENT OF LOT COVERAGE (MAX. 50%)             | 38.8%                  |
| EXISTING PARKING                               |                        |
| OFFICE                                         |                        |
| MIN. (1 SPACE/350 S.F.)                        | 27 SPACES              |
| MAX. (1 SPACE/200 S.F.)                        | 48 SPACES              |
| 30 WAREHOUSE EMPLOYEES                         |                        |
| MIN. (1 SPACE/1.5 EMPLOYEES)                   | 20 SPACES              |
| MAX. (1 SPACE/1 EMPLOYEE)                      | 30 SPACES              |
| EXISTING PARKING PROVIDED                      | 49 SPACES              |
| PARKING REQUIRED FOR PROPOSED ADDITION         |                        |
| 20 WAREHOUSE EMPLOYEES                         |                        |
| MINIMUM (1 SPACE/1.5 EMPLOYEES)                | 13 SPACES              |
| MAXIMUM (1 SPACE/1 EMPLOYEE)                   | 20 SPACES              |
| TOTAL PARKING REQUIRED                         |                        |
| MINIMUM                                        | 60 SPACES              |
| MAXIMUM                                        | 98 SPACES              |
| PARKING PROVIDED                               |                        |
| ADDITION                                       | 23 SPACES              |
| TOTAL                                          | 72 SPACES              |
| (INCLUDES 2 VAN ACCESSIBLE & 3 CARPOOL SPACES) |                        |
| BICYCLE PARKING (LONG TERM) (INSIDE BLDG.)     | 2 SPACES               |

**LANDSCAPE DATA:**

|                                           |              |
|-------------------------------------------|--------------|
| VJLA                                      |              |
| LOADING/MANEUVURING & STORAGE             | 36,712± S.F. |
| EMPLOYEE/VISITOR PARKING & ENTRANCE DRIVE | 22,792± S.F. |
| TOTAL VJLA                                | 59,504± S.F. |
| L.A. REQUIRED* (7.5% X VJLA)              | 1,709 S.F.   |
| L.A. PROVIDED                             | 1,725± S.F.  |
| *N.C. LOADING/MANEUVURING & STORAGE AREAS |              |

**TREE CANOPY DATA:**

|                                      |                        |
|--------------------------------------|------------------------|
| GROSS SITE AREA                      | 196,891± S.F./4.52 AC. |
| TREE CANOPY CATEGORY (INDUSTRIAL)    | CLASS B                |
| EXISTING TREE CANOPY                 | 41,314± S.F. (21%)     |
| EXISTING TREE CANOPY TO BE PRESERVED | 10,244± S.F. (5.2%)    |
| TOTAL TREE CANOPY REQUIRED x 0.5     | 18,705± S.F. (9.5%)    |
| (PER 10.1.2.B.2)                     |                        |
| TOTAL TREE CANOPY TO BE PROVIDED     | 18,705± S.F. (9.5%)    |

\*TREE CANOPY DEPICTED ON PLAN PER MSD LOGIC MAPPING, AERIAL PHOTO OR FIELD SURVEY. TREE CANOPY CALCULATIONS BASED UPON TREE AREAS SHOWN.

- GENERAL NOTES:**
1. DOMESTIC WATER SUPPLY: SUBJECT SITE CAN BE SERVED BY THE LOUISVILLE WATER COMPANY. THE NECESSARY WATER SYSTEM IMPROVEMENTS REQUIRED TO SERVICE THE DEVELOPMENT SHALL BE AT THE OWNER/DEVELOPER'S EXPENSE.
  2. TREE PRESERVATION: A TREE PRESERVATION PLAN SHALL BE PROVIDED TO THE PLANNING COMMISSION'S STAFF LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITIES ON THE SITE.
  3. PROTECTION OF TREES TO BE PRESERVED: CONSTRUCTION FENCING SHALL BE ERECTED PRIOR TO ANY GRADING OR CONSTRUCTION ACTIVITIES—PREVENTING COMPACTION OF ROOT SYSTEMS OF TREES TO BE PRESERVED. THE FENCING SHALL ENCLOSE THE AREA BENEATH THE DRIP LINE OF THE TREE CANOPY AND SHALL REMAIN IN PLACE UNTIL ALL CONSTRUCTION IS COMPLETE. NO PARKING, MATERIAL STORAGE OR CONSTRUCTION ACTIVITIES SHALL BE PERMITTED WITHIN THE FENCED AREA.
  4. A LANDSCAPE AND TREE CANOPY PLAN PER CHAPTER 10 OF THE LDC SHALL BE PROVIDED AS REQUIRED PRIOR TO ISSUANCE OF BUILDING PERMIT.
  5. THE DEVELOPMENT LIES IN THE JEFFERSONTOWN FIRE DISTRICT.
  6. ALL LUMINAIRES SHALL BE AIMED, DIRECTED OR FOCUSED SUCH AS TO NOT CAUSE DIRECT LUMINAIRE TO BE DIRECTED TOWARDS RESIDENTIAL USES OR PROJECTED OPEN SPACES (IE. CONSERVATION EASEMENTS, GREENWAYS OR PARKWAYS) ON ADJACENT OR NEARBY PARCELS, OR TO CREATE GLARE PERCEPTIBLE ON PUBLIC STREETS AND RIGHT-OF-WAYS PER CHAPTER 4.1.3. OF THE LDC.
  7. ALL DUMPSTER PADS, TRANSFORMERS, AC UNITS, GENERATOR PADS TO BE SCREENED PER CHAPTER 10 OF THE LDC.
  8. BUILDING ARCHITECTURE TO COMPLY WITH CHAPTER 5.4 OF THE LDC.
  9. ALL INTERIOR SIDEWALKS THAT ADJUT PARKING TO BE FIVE (5) FEET WIDE MINIMUM.
  10. MITIGATION MEASURES FOR DUST CONTROL SHALL BE IN PLACE DURING CONSTRUCTION TO PREVENT FUGITIVE EMISSIONS REACHING EXISTING ROADS AND NEIGHBORHOODS.
  11. JEFFERSONTOWN APPROVAL REQUIRED PRIOR TO MSD CONSTRUCTION PLAN APPROVAL.
  12. COMPATIBLE UTILITIES SHALL BE PLACED IN A COMMON TRENCH UNLESS OTHERWISE REQUIRED BY APPROPRIATE AGENCIES.

- MSD NOTES:**
1. WASTEWATER: WASTEWATER WILL CONNECT TO THE CEDAR CREEK WASTEWATER TREATMENT PLANT BY LATERAL EXTENSION AGREEMENT. SUBJECT TO FEES. SANITARY SEWER CAPACITY TO BE APPROVED BY METROPOLITAN SEWER DISTRICT.
  2. DRAINAGE/STORMWATER DETENTION: DETENTION TO BE PROVIDED OFF-SITE AS DEPICTED ON THE PLAN. POST-DEVELOPMENT PEAK FLOWS WILL NOT EXCEED PRE-DEVELOPED PEAK FLOWS FROM DEVELOPMENT FOR THE 2, 10, AND 100 YEAR STORMS. DRAINAGE PATTERN (DEPICTED BY FLOW ARROWS) IS FOR THE CONCEPT PURPOSES ONLY. FINAL CONFIGURATION AND SIZE OF DRAINAGE PIPES AND CHANNELS SHALL BE DETERMINED DURING THE CONSTRUCTION PLAN DESIGN PROCESS. DRAINAGE FACILITIES SHALL CONFORM TO MSD REQUIREMENTS.
  3. EROSION AND SEDIMENTATION CONTROL: A SOIL AND SEDIMENTATION CONTROL PLAN SHALL BE DEVELOPED AND IMPLEMENTED IN ACCORDANCE WITH MSD AND THE USDA NATURAL RESOURCES CONSERVATION SERVICE RECOMMENDATIONS. DOCUMENTATION OF MSD'S APPROVAL OF THE PLAN SHALL BE SUBMITTED TO THE PLANNING COMMISSION PRIOR TO GRADING AND CONSTRUCTION ACTIVITIES.
  4. NO PORTION OF THE SUBJECT PROPERTY LIES WITHIN A FLOOD HAZARD AREA PER FEMA'S FIRM MAPPING (21111C0064E).
  5. AN EASEMENT PLAT FOR THROUGH DRAINAGE WILL BE REQUIRED PRIOR TO MSD CONSTRUCTION APPROVAL.
  6. THE FINAL DESIGN OF THIS PROJECT MUST MEET ALL MS4 WATER QUALITY REGULATIONS ESTABLISHED BY MSD. SITE LAYOUT MAY CHANGE AT THE DESIGN PHASE DUE TO PROPER SIZING OF GREEN BEST MANAGEMENT PRACTICES.

**STORMWATER POLLUTION PREVENTION PLAN NOTE:**

THE APPROVED STORMWATER POLLUTION PREVENTION PLAN (SWPPP) SHALL BE IMPLEMENTED PRIOR TO ANY LAND-DISTURBING ACTIVITY ON THE CONSTRUCTION SITE. ANY MODIFICATIONS TO THE APPROVED SWPPP PLAN MUST BE REVIEWED AND APPROVED BY MSD. SWPPP BMP'S (BEST MANAGEMENT PRACTICES) SHALL BE INSTALLED PER THE PLAN AND MSD STANDARDS.

DETENTION BASINS, IF APPLICABLE, SHALL BE CONSTRUCTED FIRST AND SHALL PERFORM AS SEDIMENT BASINS DURING CONSTRUCTION UNTIL THE CONTRIBUTING DRAINAGE AREAS ARE SEEDDED AND STABILIZED.


ACTIONS MUST BE TAKEN TO MINIMIZE THE TRACKING OF MUD AND SOIL FROM CONSTRUCTION AREAS ONTO PUBLIC ROADWAYS. SOIL TRACKED ONTO THE ROADWAY SHALL BE REMOVED DAILY.

SOIL STOCKPILES SHALL BE LOCATED AWAY FROM STREAMS, PONDS, SWALES, AND CATCH BASINS. STOCKPILES SHALL BE SEEDDED, MULCHED, AND ADEQUATELY CONTAINED THROUGH THE USE OF SILT FENCE.

ALL STREAM CROSSINGS MUST UTILIZE LOW-WATER CROSSING STRUCTURES PER MSD STANDARD DRAWING ES-02-03.

SEDIMENT-LADEN GROUNDWATER ENCOUNTERED DURING TRENCHING, BORING OR OTHER EXCAVATION ACTIVITIES SHALL BE PUMPED TO A SEDIMENT TRAPPING DEVICES PRIOR TO BEING DISCHARGED INTO A STREAM, POND, SWALE OR CATCH BASIN.

WHERE CONSTRUCTION OR LAND DISTURBING ACTIVITY WILL OR HAS TEMPORARILY CEASED ON ANY PORTION OF A SITE, TEMPORARY SITE STABILIZATION MEASURES SHALL BE REQUIRED AS SOON AS PRACTICABLE, BUT NO LATER THAN 14 DAYS AFTER THE ACTIVITY HAS CEASED.

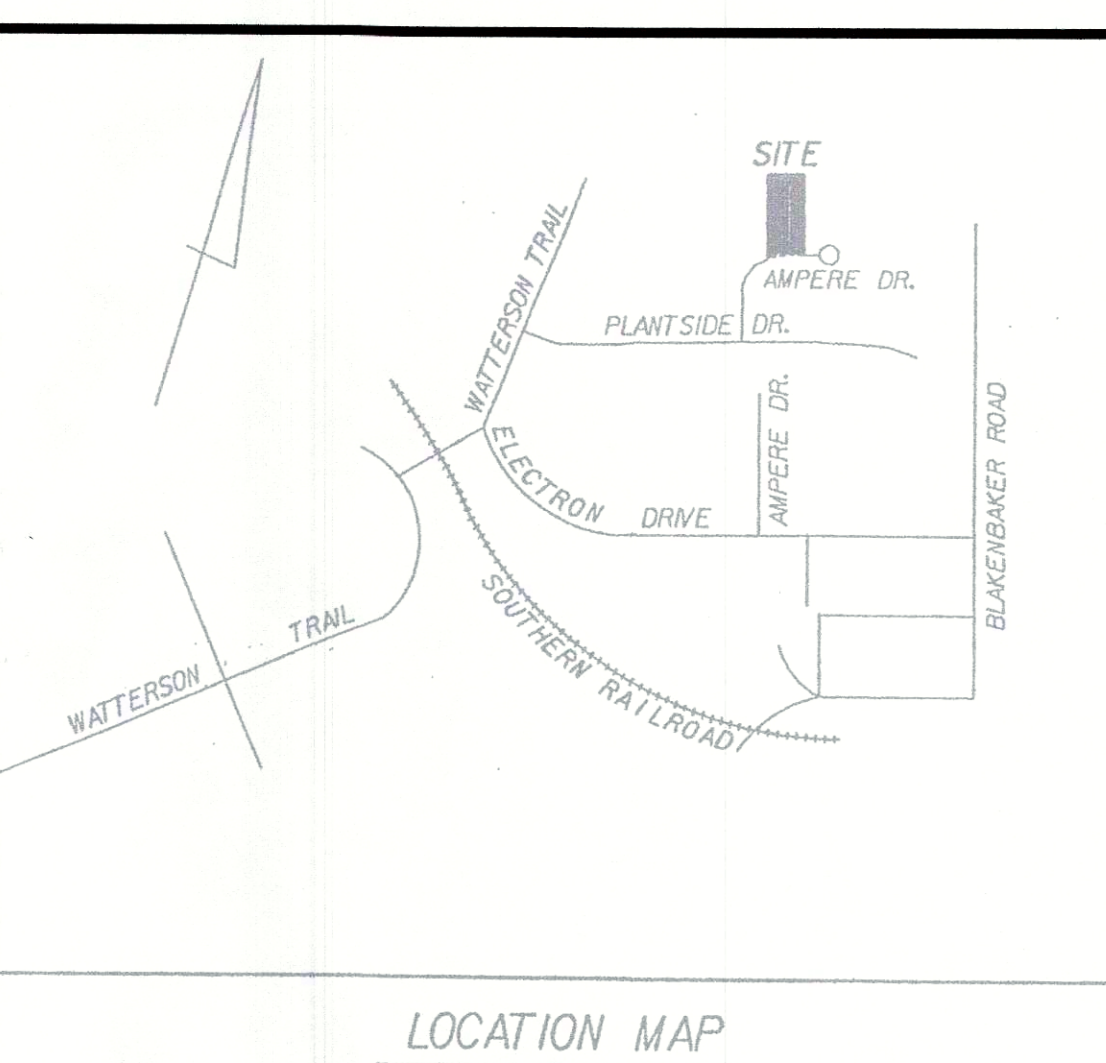

**LEGEND**

|                                        |                                  |
|----------------------------------------|----------------------------------|
| EXISTING CONTOUR                       | EXISTING TREE MASS               |
| EXISTING GAS SERVICE                   | EXISTING DOMESTIC WATER LINE     |
| EXISTING 6" WATER LINE                 | EXISTING OVERHEAD ELECTRIC LINE  |
| EXISTING OVERHEAD ELECTRIC LINE        | EXISTING STORM                   |
| EXISTING FIRE HYDRANT                  | PROPOSED DRAINAGE ARROW          |
| REVISED TREE LINE                      | PROPOSED INTERIOR LANDSCAPE AREA |
| PROPOSED TREE CANOPY PRESERVATION AREA | PROPOSED CARPOOL SPACE           |

- PUBLIC WORKS NOTES:**
1. NO LANDSCAPING OR COMMERCIAL SIGNS SHALL BE PERMITTED IN METRO WORKS RIGHT-OF-WAY.
  2. THE DEVELOPER IS RESPONSIBLE FOR ANY UTILITY RELOCATION ON THE PROPERTY.
  3. TREES AND SHRUBBERY SHALL BE TRIMMED OR REMOVED TO PROVIDE SITE DISTANCE AS REQUIRED PER METRO PUBLIC WORKS STANDARDS.
  4. ALL SIDEWALK RAMP SHALL CONFORM TO A.D.A. STANDARD SPECIFICATION, THE "SPECIAL NOTE FOR DETECTABLE WARNING FOR SIDEWALK RAMP" PER KTC STANDARD DRAWING FOR SIDEWALKS AND PER "KENTUCKY STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION," LATEST EDITION.

**AREA OF DISTURBANCE: 1.42 ACRES**

|                          |               |
|--------------------------|---------------|
| IMPERVIOUS AREAS:        |               |
| EXISTING IMPERVIOUS AREA | 95,872± S.F.  |
| PROPOSED IMPERVIOUS AREA | 44,354± S.F.  |
| TOTAL IMPERVIOUS AREA    | 140,226± S.F. |
| PERCENT INCREASE         | 46%           |

**WAIVER REQUEST:**

A WAIVER OF THE LAND DEVELOPMENT CODE, CHAPTER 10.2.4.B. IS REQUESTED TO ALLOW A 100% OVERLAP OF A SANITARY SEWER AND DRAIN EASEMENT INTO THE 15' LANDSCAPE BUFFER ALONG THE NORTH AND EAST PROPERTY LINES.

**RECEIVED**

JAN 16 2018

PLANNING & DESIGN SERVICES

For Buried Line/Cable Locations  
\*\* Contact Two Business Days Before \*\*

**Kentucky 811**

Know what's below.  
Call before you dig.

www.kentucky811.com

CASE # 17DEVPLAN1224  
MSD WM # 11721

GRAPHIC SCALE 1"=30'

0 15 30 60

**DEVELOPER**  
MILON LOUISVILLE LLC  
17854 CHESTERFIELD  
12550 LAKE STATION PLACE  
LOUISVILLE, KY 40299  
(502) 239-2848

**OWNER**  
MILON LOUISVILLE LLC  
17854 CHESTERFIELD  
12550 LAKE STATION PLACE  
LOUISVILLE, KY 40299  
(502) 239-2848

**REVISED DETAILED DISTRICT DEVELOPMENT PLAN**

**CROWN PACKAGING**

**OFFICE/WAREHOUSE EXPANSION**

2246 AMPERE DRIVE  
TAX BLOCK 2369, LOT 29  
DEED BOOK 9877, PAGE 433

LOUISVILLE/JEFFERSON COUNTY METRO PUBLIC WORKS

Revisions

|                                |  |
|--------------------------------|--|
| 01/02/18 PER AGENCY REVIEW     |  |
| 01/16/18 PER 2nd AGENCY REVIEW |  |

Vertical Scale: N/A

Horizontal Scale: 1"=30'

Date: 12/4/17

Job Number: 3475

Sheet

1

of 1