





Howards Metal Sales Quotation Package



QUOTATION FOR:

Brent Amling
1Main
Louisville, KY 40220
502-553-3953

CONTACT:

Jmm
100 Broadway Street
Chaplin, KY 40012
502-673-1000

CONSTRUCTION: DIMENSIONS:

Post Frame
40' X 60' X 14'

Initial Budgetary Quote \$27,600

SPECIFICATIONS FOR 40' X 60' X 14' POST FRAME PACKAGE:

• MATERIAL PACKAGE

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 6 x 6 Treated Eave Posts (10' O/C) *8'*
- 6 x 6 Treated Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 6 Wall Girts (36" O/C)
- 2 x 4 Roof Purlins (24" O/C)
- 2 x 10 Double Top Girt Truss Carrier
- Brilliant Panel-Loc Plus - Central Guard Steel Siding
- Black Panel-Loc Plus - Central Guard Steel Roof
- One Bag of Concrete Mix per Post Hole

• DOORS & WINDOWS

- Two 10' X 10' General Openings
- One 3' Flush Entry Door



• 12" OVERHANG ON ALL SIDES STEEL SOFFIT

• FASTENERS

- 1 In. Metal to Wood Screws for Steel Wall, Roof Panels
- 3 1/2 In. Galv. Pole Barn Nails for Truss Carrier
- 16 Galv. Spirals for Skirt Board
- Galvanized Steel Framing Nails

• DETAILED BUILDING PLANS

- *wet set bracket on all 6x6*
- *2" Vinyl Roof + Wall*

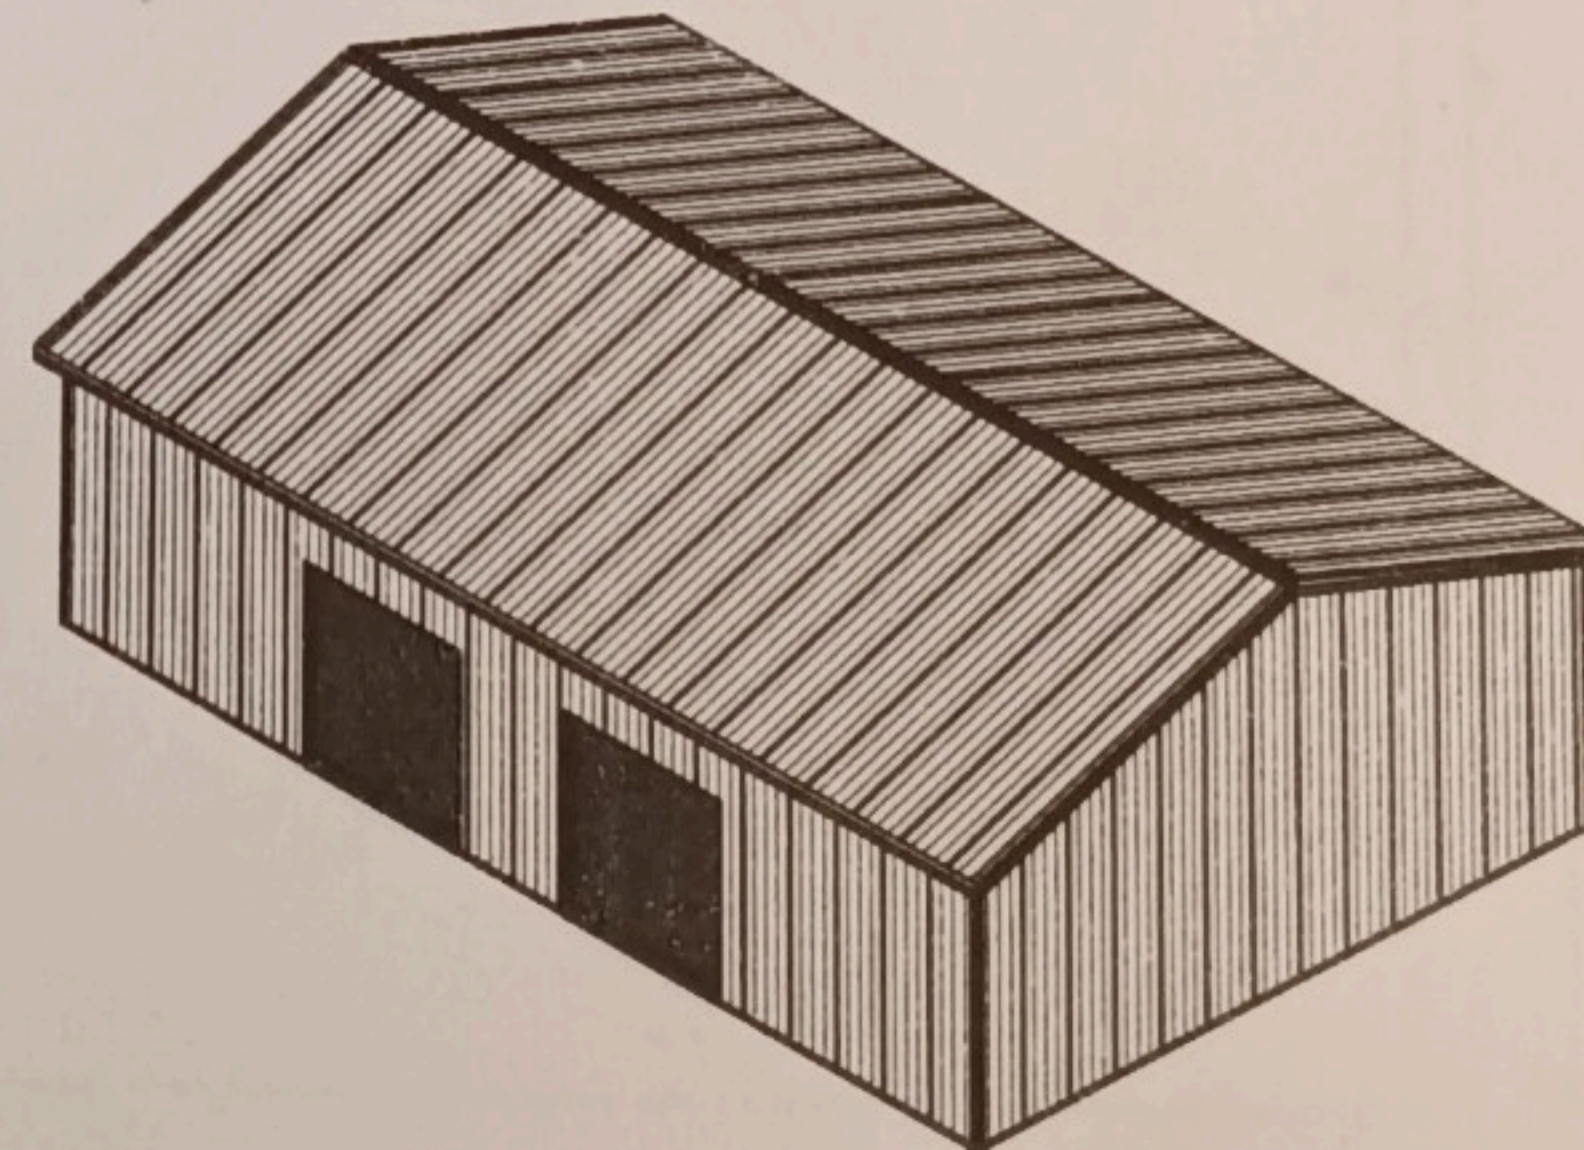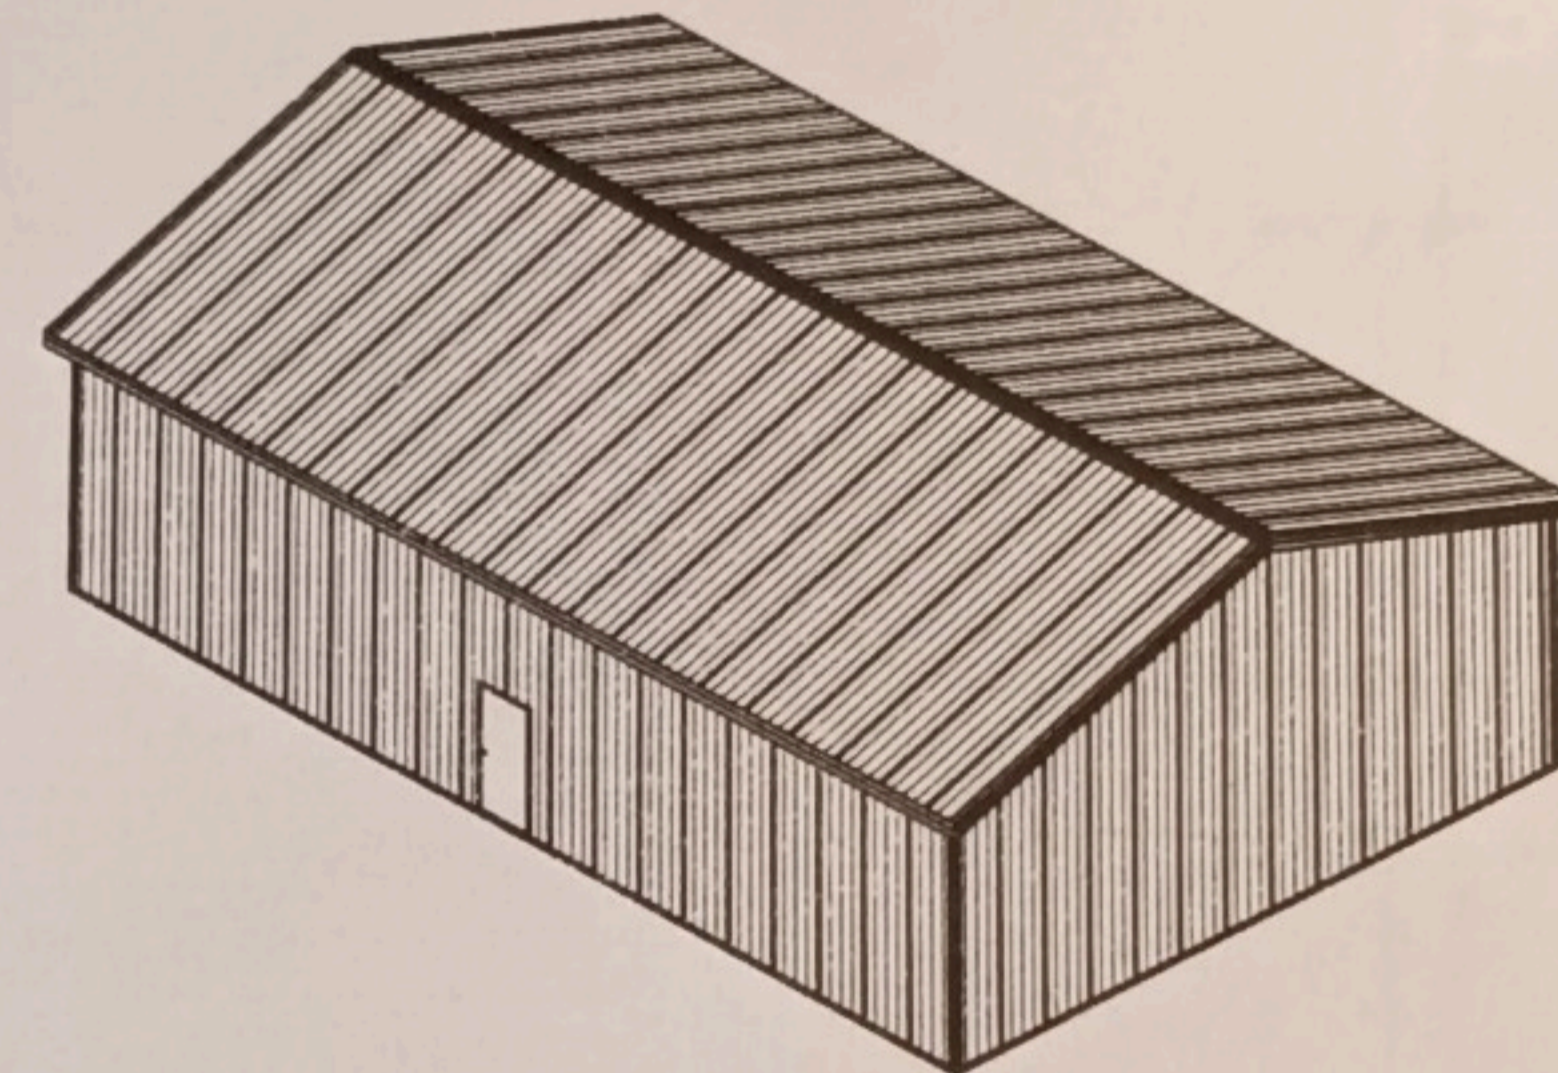

JAN 18