

## GENERAL NOTES




- Parking areas and drive lanes are to be a hard and durable surface.
- All temporary and permanent luminaries shall be aimed, directed or focused such as to cause light to be directed away from existing and future residential uses and open spaces in the vicinity of the site, and shall not create glare on any public street or right-of-way, as per the requirements of LDC 4.13.
- Mitigation measures for dust control shall be in place during construction to prevent fugitive particulate emissions from reaching existing roads and properties in the vicinity.
- Property boundary, topography and existing features are derived from LOJIC mapping and do not constitute a survey. Also, approval of the site plan is not final until all engineering plans are approved.
- Open storage, where permitted, shall be screened in accordance with the Zoning Ordinance.
- There shall be no increase in drainage run-off to the right-of-way.
- There shall be no commercial signs in the right-of-way.
- There shall be no landscaping in the right-of-way without an encroachment permit.
- Right-of-Way dedication by Deed or Minor Plat shall be recorded prior to approval of the Construction Plan by Transportation Planning.
- All roadway and entrance intersections shall meet the requirements for landing areas as set by Metro Public Works.
- Street trees shall be planted in a manner that does not affect public safety and maintains proper sight distance. Final location will be determined during construction.
- Construction plans, bond, and permit are required by Metric Public Works prior to construction approval.
- Karst survey will be completed prior to application for building permits

## EROSION PREVENTION AND SEDIMENT CONTROL NOTES

- An approved Erosion Prevention and Sediment Control (EPSC) Plan shall be approved by MSD and implemented prior to any land-disturbing activity on the construction site. BMPs shall be installed to meet MSD standards.
- Any modifications to the approved EPSC must be approved by MSD.
- The tracking of mud and soil from construction areas onto public roadways shall be minimized. Soil tracked onto these roadways shall be removed daily.
- Soil stockpiles shall be located away from streams, ponds swales and catchbasins. Stockpiles shall be seeded, mulched and adequately contained using silt fencing.
- Sediment-laden groundwater encountered during trenching, boring or other excavation activities shall be pumped to a sediment trapping device prior to its discharge into any stream, pond, swale or catchbasin.
- All storm drainage shall conform to MSD standards.
- Construction fencing shall be erected prior to any construction or grading activities to prevent compaction of root systems of existing trees to be preserved. The fencing shall enclose the area beneath the drip line of the tree canopy and shall remain in place throughout the construction process. No parking, material storage or construction activities shall be permitted within the fenced area.

## Tree Canopy Calculations

Existing impervious surface: 14,590 sq ft  
 New impervious surface: 15,373 sq ft  
 Change in impervious surface: 783 sq ft  
 No tree canopy is required (LDC 102.B.3.)

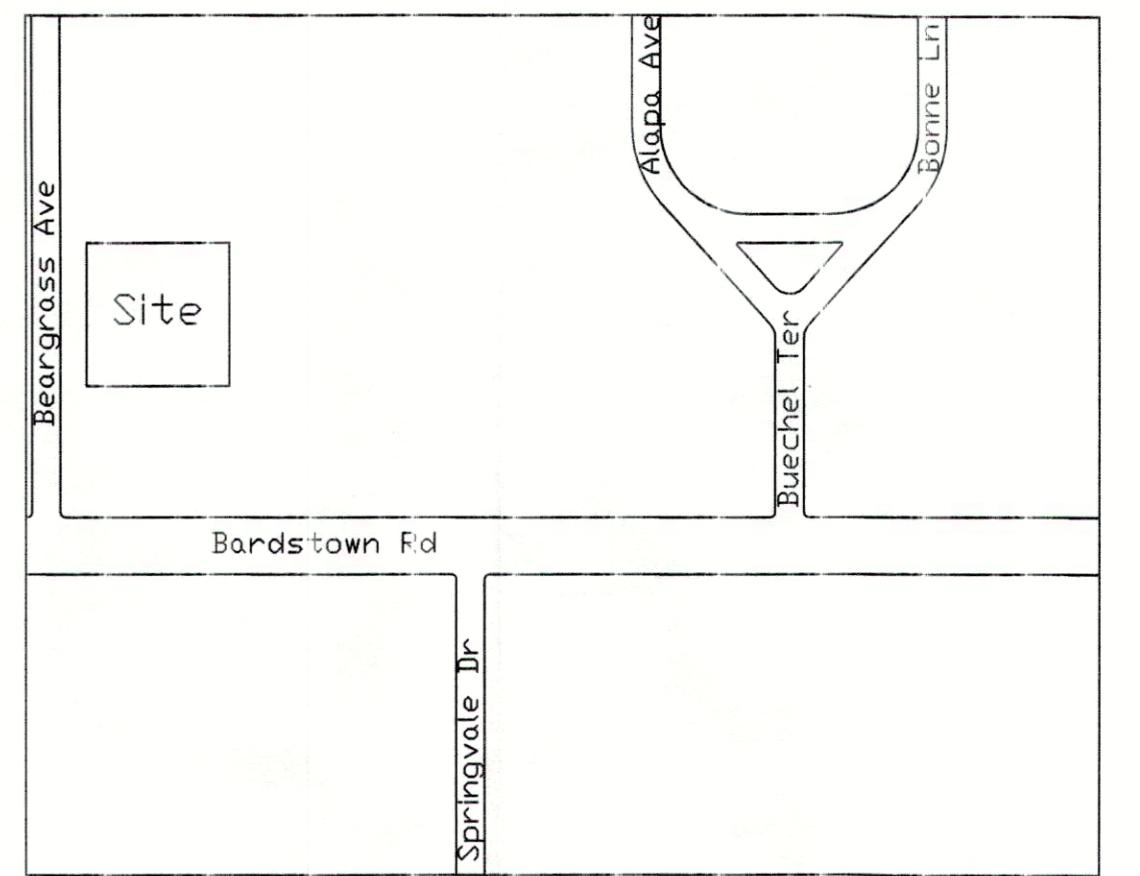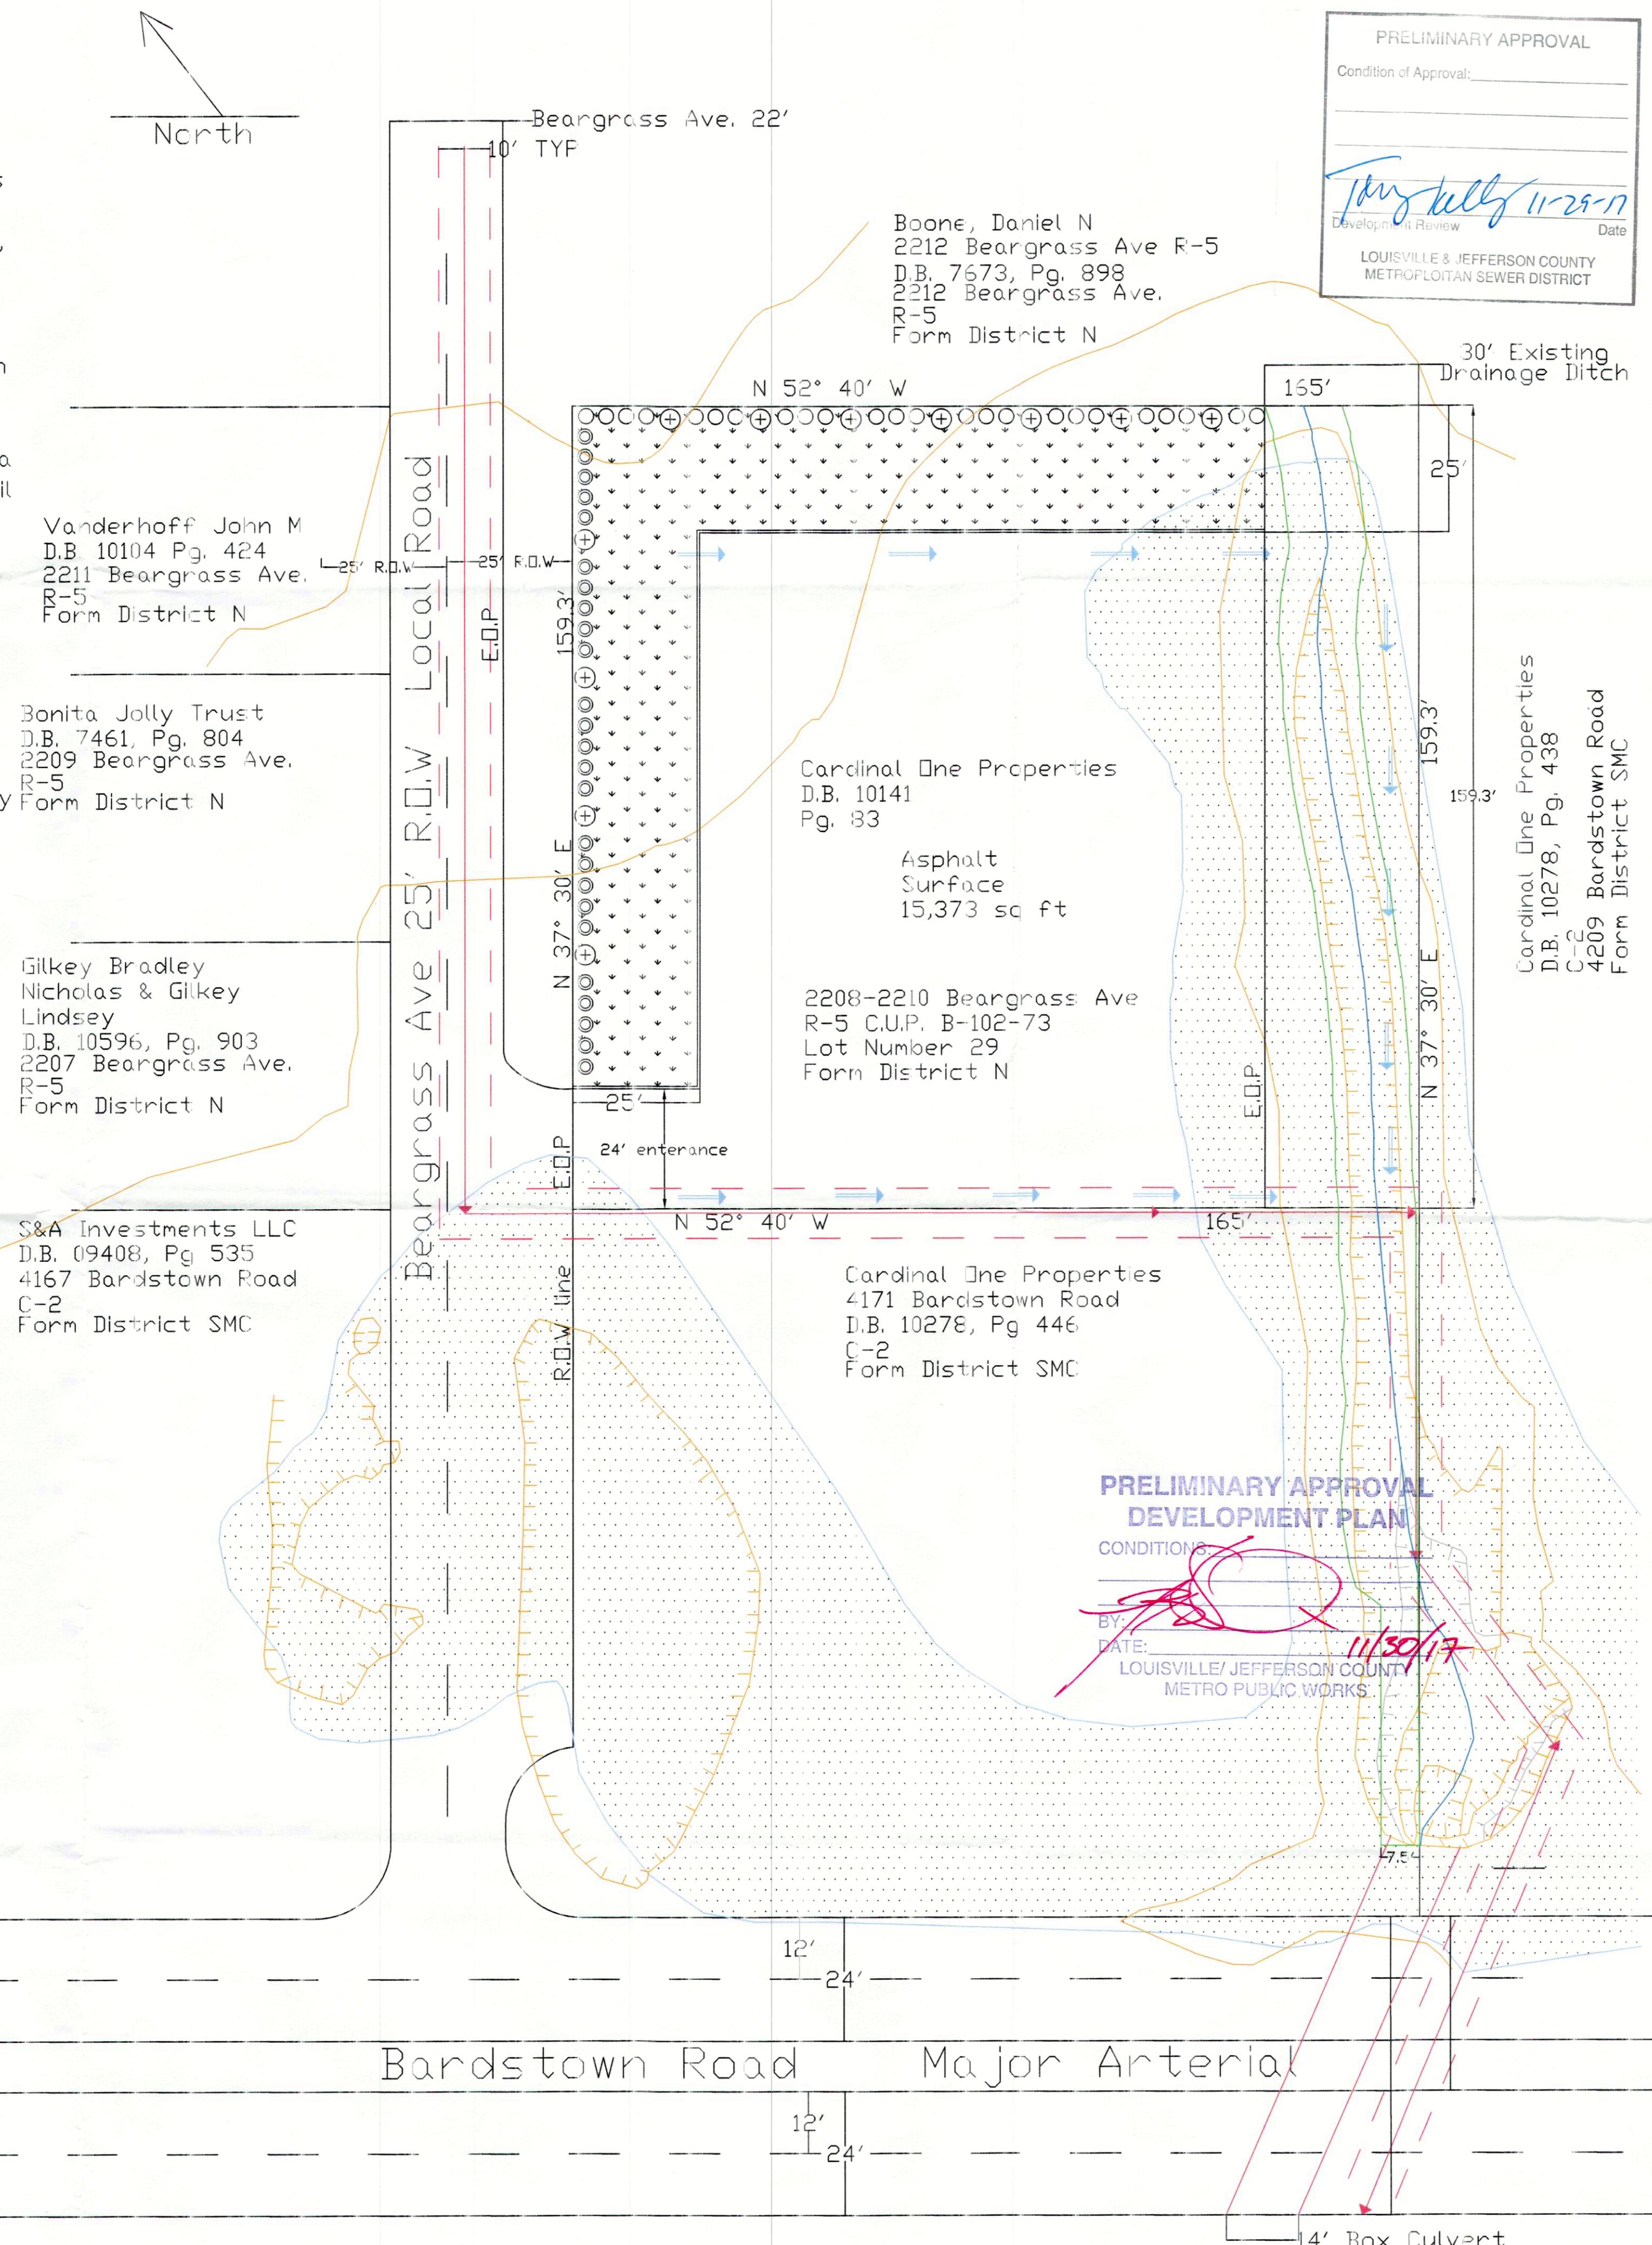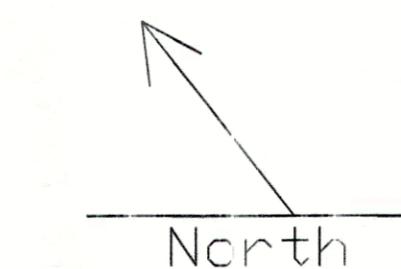

## WAIVER AND VARIANCE REQUESTS

Side walk waiver was applied for on 4/14/17

TEAM	AUTOMOTIVE LOT	REVISIONS
RELATED CASE	CASE NUMBER	RECEIVED
JACOB MATTINGLY	4209 BARDSTOWN ROAD	NOV 22 2017
DRAFTSMAN	LOUISVILLE KENTUCKY	PLANNING & DESIGN SERVICES
JACOB MATTINGLY	40218	4. 9/11/17
DRAFTSMAN	4209 BARDSTOWN ROAD	5. 11/6/17
JACOB MATTINGLY	LOUISVILLE KENTUCKY	6. 11/22/17
DRAFTSMAN	40218	RECEIVED
CARDINAL ONE PROPERTIES	CASE NUMBER: 16Z01NE1049	NOV 22 2017
DEVELOPER & OWNER	RELATED CASE: CUP: B-102-73	PLANNING & DESIGN SERVICES
CARDINAL ONE PROPERTIES	4209 BARDSTOWN ROAD	RECEIVED
ANDYSAUTOSALES@BELLSDOWN.NET	LOUISVILLE KENTUCKY 40218	NOV 22 2017
4209 BARDSTOWN ROAD	40218	RECEIVED
ANDYSAUTOSALES@BELLSDOWN.NET	LOUISVILLE KENTUCKY 40218	NOV 22 2017
4209 BARDSTOWN ROAD	502-491-3400	RECEIVED
ANDYSAUTOSALES@BELLSDOWN.NET	502-491-3400	NOV 22 2017