

GAMECHANGER 1000



GAMECHANGER 500

GAMECHANGER™ Electrical Detail	GAMECHANGER™ 1000	GAMECHANGER™ 500
Input Watts	1000w	500w
Kw Draw	1.04	0.52
*Lumen Output	115,000	58,000
Lumens/Watts	115	115
CCT	5,700	5,700
CRI	>80	>80
Weight	51 lbs.	27 lbs.
<b>CURRENT</b>	<i>Amps</i>	<i>Amps</i>
277v	3.75	1.88
240v	4.33	2.17
208v	5	2.5
120v	8.67	4.33

## APPLICATIONS

Outdoor sports fields at all levels, general area lighting

## RATINGS

IP66, -40°C to 55°C

## INPUT POWER



100v - 240v auto sensing  
200v - 300v auto sensing  
480v with neutral can be split into 277v  
480v w/o neutral can be stepped down via transformer within QLED system

\* The specifications listed were obtained under optimal testing conditions. Please note that changes in options, features and conditions may result in slightly different performance specifications among fixtures.


Amps are based on single Phase.  
3 Phase systems will be balanced per pole.  
480 and 347V - Will be stepped down to 277V.

## OPTICS

Various symmetrical and asymmetrical rectangular and round patterns with built in glare control utilizing TIR lens technology.

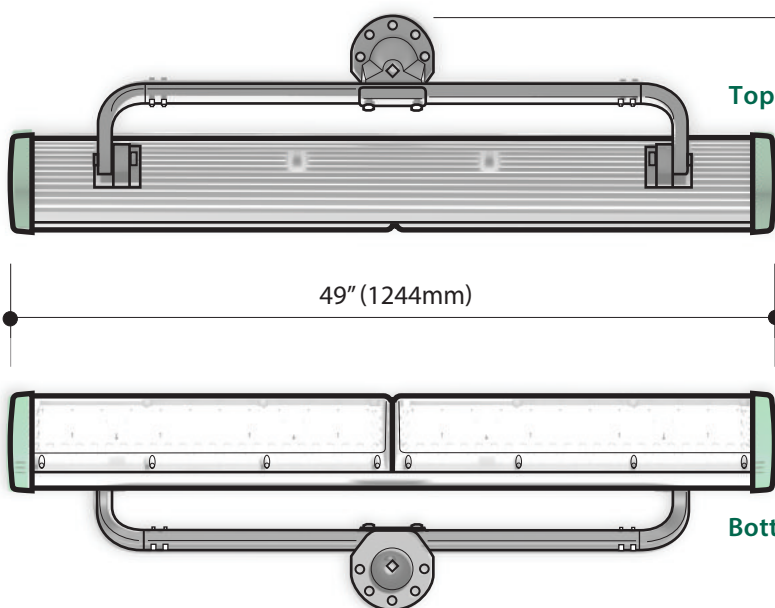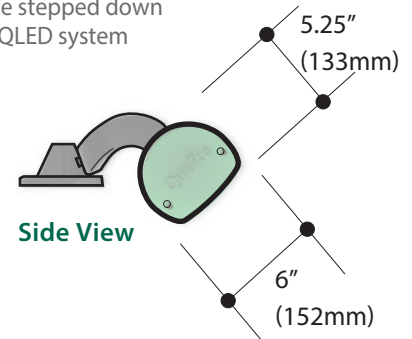

GAMECHANGER 1000

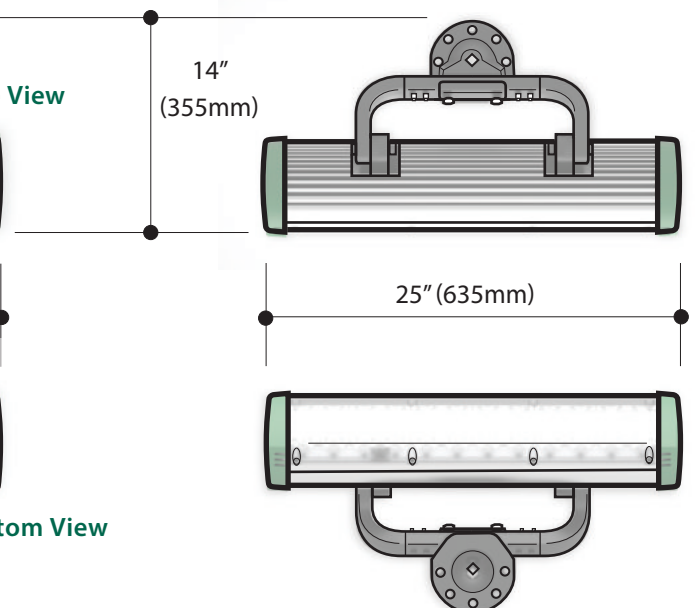

GAMECHANGER 500